

NEAR EAST UNIVERSITY

Faculty of Engineering

Department of Computer Engineering

E-COMMERCE ON COMPUTER PARTS

**Graduation Project
Com – 400**

Student : Can ARSLAN

Supervisor : Mr. Ümit İLHAN

Nicosia - 2002

ABSTRACT

I have conducted this project using ASP (Active Server Pages) technology. The web site introduced in this project is a e-commerce web site . On those pages, online shopping customers can have membership to the online shopping .

Also, a program has been developped with Microsoft Front Page in order to view all the user transactions and comments where this program will run on the server side of the system.

TABLE OF CONTENTS

| | <u>Page</u> |
|-----------------------------------------------|-------------|
| ACKNOWLEDGMENTS..... | i |
| ABSTRACT..... | ii |
| What is E-Commerce?..... | 1 |
| What is Active Server Pages?..... | 2 |
| The Active Server Pages Model..... | 2 |
| HTML (Hypertext Markup Language)..... | 3 |
| IIS (Internet Information Server)..... | 4 |
| VBScript..... | 5 |
| JavaScript..... | 5 |
| DATABASES..... | 7 |
| Table1 : comp_kategori..... | 7 |
| Table2 : complar..... | 7 |
| Table3 : kategori..... | 7 |
| Table4 : siparis_kalemleri..... | 7 |
| Table5 : siparisler..... | 8 |
| Table6 : uyeler..... | 8 |
| Tablo7 : ziyaretci_sayfalari..... | 8 |
| //ROOT..... | 9 |
| //root/default.asp..... | 9 |
| //root/ comp_kategorileri.asp..... | 10 |
| //root/ comp_kategorileri_vitrini.asp..... | 12 |
| //root/comp_vitrin.asp..... | 15 |
| //root/kayit.asp..... | 16 |
| //root/ kayit_islem.asp..... | 19 |
| //root/sayfatop.htm..... | 22 |
| //root/ uye_giris.asp..... | 25 |
| //root/uye_giris_islem.asp..... | 29 |
| //root/benim_sayfam..... | 31 |
| //root/benim_sayfam/sayfam.asp..... | 31 |
| //root/ benim_sayfam/sayfami_duzenle.asp..... | 33 |
| //root/comp_sayfalari..... | 35 |
| //root/comp_sayfalari/asus1.asp?comp_id=..... | 35 |

| | |
|--------------------------------------------------|-----------|
| //root/comp_sayfalari/cdrom.asp?comp_id=..... | 36 |
| //root/comp_sayfalari/cpu.asp?comp_id=..... | 37 |
| //root/comp_sayfalari/ekran.asp?comp_id=..... | 38 |
| //root/comp_sayfalari/harddisk.asp?comp_id=..... | 38 |
| //root/comp_sayfalari/keyboard.asp?comp_id=..... | 39 |
| //root /comp_sayfalari/modem.asp?comp_id=..... | 40 |
| //root/comp_sayfalari/monitor.asp?comp_id=..... | 40 |
| //root /comp_sayfalari/printer.asp?comp_id=..... | 41 |
| //root/comp_sayfalari/scanner.asp?comp_id=..... | 42 |
| //root/comp_sayfalari/sound.asp?comp_id=..... | 42 |
| //root /comp_sayfalari/back.inc..... | 43 |
| //root/satis..... | 43 |
| //root/satis/sepet.asp..... | 43 |
| //root/satis/sepet.inc..... | 43 |
| //root/satis/sepet_ekle.asp..... | 44 |
| //root/satis/sepete_ekle_islem.asp..... | 46 |
| //root/satis/sepete_gozat.asp..... | 48 |
| //root/satis/sepete_gozat_islem.asp..... | 51 |
| //root/satis/siparis_ekle.asp..... | 58 |
| //root/text_stream..... | 60 |
| //root/text_stream/oneri.asp..... | 60 |
| //root/text_stream/ziyaretci_defteri3.asp..... | 61 |
| //root/text_stream/ziyaretci_oneri.txt..... | 65 |
| ADO.INC..... | 65 |
| ADMINISTRATOR PANEL..... | 81 |
| Visual Basic Program..... | 81 |
| Form1..... | 81 |
| Form2..... | 83 |
| Form3..... | 86 |
| Form4..... | 88 |
| CONCLUSION..... | 89 |
| REFERENCES..... | 90 |

What is E-Commerce?

E-commerce is the buying and selling of goods and services across the Internet. An e-commerce site can be as simple as a catalog page with a phone number, or it can range all the way to a real-time credit card processing site where customers can purchase downloadable goods and receive them on the spot. Electronic commerce merchants can range from the small business with a few items for sale all the way to a large on-line retailer such as Amazon.com.

About Online Payment Processing

When a customer purchases an item with a credit card, a two step process begins.

1. The merchant or the website requests an authorization from the customer's credit card account to ensure that the card is valid and the customer has enough available balance for the purchase. The customer's bank sends an authorization number back to the merchant or the website and the order is "captured".
2. The merchandise is sent, and the merchant informs the bank where they have a merchant account. The bank deposits funds to the merchant's account while the customer's account is debited for the amount of the purchase. At that time, the customers' bank takes out the required fees and the transaction is complete.

Credit cards are an important part of enabling Internet commerce. The easiest process to integrate into an existing business is an off-line authorization and settlement process. For more advanced web merchants who are processing more than 100 transactions per month, real time credit card authorization becomes economical. With a link to a Processing Service Provider such as Cybercash or AuthorizeNet, the website generates an authorization request when the customer places the order.

If the merchant is selling hard goods which have to be shipped to the customer, then order is saved securely for later settlement. Once the goods are shipped, the merchant can settle the order, and the transaction is completed. If the merchant is selling downloadable media, software, or site memberships for example, then the order can be authorized and settled in real time, without any intervention by the merchant.

What is Active Server Pages?

Microsoft® Active Server Pages (ASP) is a *server-side scripting* environment that you can use to create and run dynamic, interactive, high-performance Web server applications. When your scripts run on the server rather than on the client, your Web server does all the work involved in generating the Hypertext Markup Language (HTML) pages that you send to browsers. You need not worry whether a browser can process your pages: your Web server does all the processing for it.

You need only a working knowledge of HTML to begin using ASP. Take a look at A Brief History of Hypertext to better understand ASP's place in the evolution of the Web, as well as the powerful set of features ASP provides.

Active Server Pages is a feature of and can be used with the following Web servers:

- Microsoft Internet Information Server version 3.0 on Windows NT Server
- Microsoft Peer Web Services Version 3.0 on Windows NT Workstation
- Microsoft Personal Web Server on Windows 95

The Active Server Pages Model

An ASP script begins to run when a browser requests an .asp file from your Web server. Your Web server then calls ASP, which reads through the requested file from top to bottom, executes any commands, and sends an HTML page to the browser.



An Active Server Page (ASP) is an HTML page that includes one or more scripts (small embedded programs) that are processed on a Microsoft Web server before the page is

sent to the user. An ASP is somewhat similar to a server-side include or a common gateway interface (CGI) application in that all involve programs that run on the server, usually tailoring a page for the user. Typically, the script in the Web page at the server uses input received as the result of the user's request for the page to access data from a database and then builds or customizes the page on the fly before sending it to the requestor.

ASP is a feature of the Microsoft Internet Information Server (IIS), but, since the server-side script is just building a regular HTML page, it can be delivered to almost any browser. You can create an ASP file by including a script written in VBScript or JScript in an HTML file or by using ActiveX Data Objects (ADO) program statements in the HTML file. You name the HTML file with the ".asp" file suffix. Microsoft recommends the use of the server-side ASP rather than a client-side script, where there is actually a choice, because the server-side script will result in an easily displayable HTML page. Client-side scripts (for example, with JavaScript) may not work as intended on older browsers.

HTML (Hypertext Markup Language)

HTML (Hypertext Markup Language) is the set of "markup" symbols or codes inserted in a file intended for display on a World Wide Web browser. The markup tells the Web browser how to display a Web page's words and images for the user. The individual markup codes are referred to as elements

HTML is a standard recommended by the World Wide Web Consortium (W3C) and adhered to by the major browsers, Microsoft's Internet Explorer and Netscape's Navigator, which also provide some additional non-standard codes. The current version of HTML is HTML 4. However, both Internet Explorer and Netscape implement some features differently and provide non-standard extensions. Web developers using the more advanced features of HTML 4 may have to design pages for both browsers and send out the appropriate version to a user. Significant features in HTML 4 are sometimes described in general as dynamic HTML. What is sometimes referred to as HTML 5 is an extensible form of HTML called XHTML.

IIS (Internet Information Server)

IIS (Internet Information Server) is a group of Internet servers (Web or HTTP, FTP, and Gopher) and other capabilities for Microsoft's Windows NT and Windows 2000 Server operating systems. IIS is Microsoft's bid to dominate the Internet server market that is also addressed by Netscape, Sun Microsystems, O'Reilly, and others. With IIS, Microsoft includes a set of programs for building and administering Web sites, a search engine, and support for writing Web-based applications that access databases. Microsoft points out that IIS is tightly integrated with the Windows NT and 2000 Servers in a number of ways, resulting in faster Web page serving.

A typical company that buys IIS can create pages for Web sites using Microsoft's Front Page product (with its WYSIWYG user interface). Web developers can use Microsoft's Active Server Page (ASP) technology, which means that applications - including ActiveX controls - can be imbedded in Web pages that modify the content sent back to users. Developers can also write programs that filter requests and get the correct Web pages for different users by using Microsoft's ISAPI interface. ASPs and ISAPI programs run more efficiently than Common Gateway Interface (CGI) and server-side include (SSI) programs, two current technologies.

Microsoft includes special capabilities for server administrators designed to appeal to Internet service providers (ISPs). It includes a single window (or "console") from which all services and users can be administered. It's designed to be easy to add components as "snap-ins" that you didn't initially install. The administrative windows can be customized for access by individual customers.

IIS includes security features and promises that it is easy to install. It works closely with the Microsoft Transaction Server to access databases and provide control at the transaction level. It also works with Microsoft's Netshow in the delivery of streaming audio and video, delayed or live.

VBScript

VBScript is an interpreted script language from Microsoft that is a subset of its Visual Basic programming language. VBScript can be compared to other script languages designed for the Web, including:

- Netscape's JavaScript
- Sun Microsystem's Tcl
- The UNIX-derived Perl
- IBM's REXX

In general, script languages are easier and faster to code in than the more structured, compiled languages such as C and C++ and are ideal for smaller programs of limited capability or that can reuse and tie together existing compiled programs.

VBScript is Microsoft's answer to Netscape's popular JavaScript. Both are designed to work with an interpreter that comes with a Web browser - that is, at the user or client end of the Web client/server session. VBScript is designed for use with Microsoft's Internet Explorer browser together with other programming that can be run at the client, including ActiveX controls, automation servers, and Java applets. Although Microsoft does support Netscape's JavaScript (it converts it into its own JScript), Netscape does not support VBScript. For this reason, VBScript is best used for intranet Web sites that use the Internet Explorer browser only.

JavaScript

JavaScript is an interpreted programming or script language from Netscape. It is somewhat similar in capability to Microsoft's Visual Basic, Sun's Tcl, the UNIX-derived Perl, and IBM's REXX. In general, script languages are easier and faster to code in than the more structured and compiled languages such as C and C++. Script languages generally take longer to process than compiled languages, but are very useful for shorter programs.

JavaScript is used in Web site development to do such things as:

- Automatically change a formatted date on a Web page
- Cause a linked-to page to appear in a popup window (see our "Make a WordPop!" page)
- Cause text or a graphic image to change during a mouse rollover

JavaScript uses some of the same ideas found in Java, the compiled object-oriented language derived from C++. JavaScript code can be imbedded in HTML pages and interpreted by the Web browser (or client). JavaScript can also be run at the server as in Microsoft's Active Server Pages (ASPs) before the page is sent to the requestor.

DATABASES

Computer.mdb

Table1 : comp_kategori

| Field Name | Type | Size |
|-------------|--------|--------------|
| comp_id | Number | Long Integer |
| kategori_id | Number | Long Integer |

Table2 : complar

| Field Name | Type | Size |
|------------|--------|--------------|
| comp_id | Number | Long Integer |
| comp_ismi | Text | 50 |
| kategori | Text | 50 |
| fiyat_TL | Number | Long Integer |
| sayfa_ismi | Text | 50 |

Table3 : kategori

| Field Name | Type | Size |
|---------------|------------------|--------------|
| kategori_id | Automatic Number | Long Integer |
| kategori_ismi | Text | 50 |

Table4 : siparis_kalemleri

| Field Name | Type | Size |
|------------|--------|--------------|
| siparis_id | Number | Long Integer |
| comp_id | Number | Long Integer |
| adet | Number | Long Integer |

Table5 : siparisler

| Field Name | Type | Size |
|-------------------|--------|--------------|
| siparis_id | Number | Long Integer |
| ad | Text | 50 |
| soy_ad | Text | 50 |
| adres1 | Text | 50 |
| adres2 | Text | 50 |
| sehir | Text | 50 |
| posta_kodu | Text | 50 |
| tel | Text | 50 |
| nakliye | Text | 50 |
| toplam | Text | 50 |
| kk_tip | Text | 50 |
| kk_num | Text | 50 |
| kk_ustundeki_isim | Text | 50 |
| durum | Text | 50 |

Table6 : uyeler

| Field Name | Type | Size |
|----------------|------|------|
| ad | Text | 50 |
| soyad | Text | 50 |
| kullanici_ismi | Text | 50 |
| sifre | Text | 50 |
| email | Text | 50 |

Tablo7 : ziyaretci_sayfalari

| Field Name | Type | Size |
|----------------|--------|--------------|
| kullanici_ismi | Text | 50 |
| kategori_id | Number | Long Integer |

//ROOT

//root/default.asp



[Home Page](#)

[Computer Parts](#)

[Register](#)

[Members](#)

Ar S LaN Computer

About Macromedia Flash Player 5...

[Welcome to ArSLaN Shop](#)

default.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title> .....: ArSLaN Computer | Online Shop :.....</title>
</head>
<% @ LANGUAGE=VBScript CODEPAGE=1254 %>
<!--#include file="sayfatop.htm"-->
</head>
<body bgcolor="#FFFFFF" leftmargin="0" topmargin="0" link="#000080"
vlink="#000080" alink="#000080" text="#000080">
<center>
```

```

<object classid="clsid:D27CDB6E-AE6D-11cf-96B8-444553540000"
codebase="http://download.macromedia.com/pub/shockwave/cabs/flash/swflash.cab#ve
rsion=5,0,0,0" width="835" Height ="421">
<param name=movie value="Movie1.swf"><param name=quality
value=high><PARAM NAME=menu VALUE=false>
<embed src="Movie1.swf" quality=high
pluginspage="http://www.macromedia.com/shockwave/download/index.cgi?P1_Prod_
Version=ShockwaveFlash" type="application/x-shockwave-flash" width="700" Height
="560"></embed></object>
<p><b><a href="default.asp">Welcome to ArSLaN Shop</a></b></p>
</center>
</body>
</html>

```

//root/ comp_kategorileri.asp



[Home Page](#)

[Computer Parts](#)

[Register](#)

[Members](#)

COMPUTER PARTS

| |
|--------------------------------|
| Main Boards |
| Video Adapters |
| Cpu |
| Hard Drives |
| Monitors |
| CDRom Drivers |
| Sound Cards |
| Modems |
| Keyboards |
| Printers |
| Scanners |

[All Computer Parts and Price](#)

comp_kategorileri.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title> .....: Computer Parts :.....</title>
</head>
<% @ LANGUAGE=VBScript CODEPAGE=1254 %>
<!--#include virtual="sayfatop.htm"-->
<!--#include file="adovbs.inc"-->
<%
Set computerDB=Server.CreateObject("ADODB.Connection")
computerDB.open "computer"
Set kategoriSeti=Server.CreateObject("ADODB.RecordSet")
kategoriSeti.Open "select * from kategori", computerDB, adOpenForwardOnly%>
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<CENTER>
<table border="0" cellpadding="0" cellspacing="0" style="border-collapse: collapse"
bordercolor="#111111" width="100%" id="AutoNumber1">
  <tr>
    <td width="100%">&nbsp;</td>
  </tr>
  <tr>
    <td width="100%">
<B>
<hr>
    </td>
  </tr>
</table>
<H3>;</H3>
<H3><font face="Lucida Sans Unicode">COMPUTER PARTS</font></H3>
<TABLE border=1 bgcolor=#FFFFFF style="border-collapse: collapse"
bordercolor="#111111" cellpadding="2" bordercolorlight="#000080"
bordercolordark="#000080" >
```

```

<%while not kategoriSeti.EOF%>
<TR>
<TD align=left valign="top"><FONT face="Lucida Sans Unicode" size=+1><A
HREF="comp_kategorileri_vitrini.asp?kategori=<%Response.Write
kategoriSeti("kategori_id")%>">
<%Response.Write kategoriSeti("kategori_ismi")%></A></FONT>&nbsp;</TD>
</TR>
<%kategoriSeti.MoveNext
wend %>
</TABLE>
<%
kategoriSeti.Close
set kategoriSeti=nothing
computerDB.close
set computerDB=nothing
%></CENTER>
</BODY>
<p align="center"><b><a href="comp_vitrin.asp">All Computer Parts and
Price</a></b></p>
</HTML>

```

//root/ comp_kategorileri_vitrini.asp



[Home Page](#)

[Computer Parts](#)

[Register](#)

[Members](#)

Printers

| Code | Computer Part Name | Price |
|------|-----------------------------------------|-------|
| 1001 | HP 640C | 54\$ |
| 1002 | HP 840C | 55\$ |
| 1003 | HP 1200 Laser | 56\$ |
| 1004 | Panasonic KXP6100 Laser | 57\$ |
| 1005 | Epson Photo 1290 | 58\$ |

[BACK](#)

comp_kategorileri_vitrini.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title> .....: Computer Parts Page :.....</title>
</head>
<!--#include virtual="sayfatop.htm"-->
<br><br><br><br>
<% @ LANGUAGE=VBScript CODEPAGE=1254 %>
<% kategori=Request.QueryString("kategori")
Set computerDB=Server.CreateObject("ADODB.Connection")
computerDB.open "computer" %>
<% Set compkategoriSeti=computerDB.Execute("select * from comp_kategori where
kategori_id=" & kategori) %>
<% Set kategoriAdSet=computerDB.Execute("select * from kategori where
kategori_id=" & kategori) %>
<CENTER>
<h2><% Response.write kategoriAdSet("kategori_ismi") %></h2>
<TABLE border=1 bgcolor=#FFFFFF width="664" bordercolorlight="#000080"
bordercolordark="#000080" style="border-collapse: collapse" bordercolor="#111111"
cellpadding="2">
<TR>
<TH width="52">Code</TH>
<TH width="318">Computer Part Name</TH>
<TH width="113">Price</TH>
</TR>
<%
while not compkategoriSeti.EOF
Set complarSet=computerDB.Execute("select * from complar where complar.comp_id
=" & compkategoriSeti("comp_id"))
while not complarSet.EOF %>
```



```

<TR>
<TD align=center width="52"><%Response.Write
complarSet("comp_id")%>&nbsp;</TD>
<TD align=center width="318"><a href="comp_sayfalari/<%Response.Write
complarSet("sayfa_ismi")%>?comp_id=<%Response.Write
complarSet("comp_id")%>"><%Response.Write
complarSet("comp_ismi")%></a>&nbsp;</TD>
<TD align=center width="113"><%Response.Write complarSet("fiyat_TL")%>$</TD>
</TR>
<%complarSet.MoveNext
wend
compkategoriSeti.MoveNext
wend
%>
</TABLE>
<%
compkategoriSeti.close
set compkategoriSeti=nothing
kategoriAdSet.close
set kategoriAdSet=nothing
computerDB.close
set computerDB=nothing
%>
</CENTER>
</BODY>
<p align="center"><b><a href="comp_kategorileri.asp">BACK</a></b></p>
</HTML>

```

//root/comp_vitrin.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>comp Kategorileri</title>
</head>
<% @ LANGUAGE=VBScript CODEPAGE=1254 %>
<!--#include virtual="sayfatop.htm"-->
<!--#include file="adovbs.inc"-->
<br><br><br><br>
<%
Set computerDB=Server.CreateObject("ADODB.Connection")
computerDB.open "computer"
Set compSeti=Server.CreateObject("ADODB.RecordSet")
compSeti.Open "select*from complar order by comp_ismi", computerDB,
adOpenForwardOnly%>
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<div align="center">
<center>
<TABLE border=1 width="631" style="border-collapse: collapse"
bordercolor="#111111" cellpadding="0" cellspacing="0" >
<TR>
<TH width="483">
<p align="center">Computer Part Name</TH>
<TH width="132">Price</TH>
</TR>
<%while not compSeti.EOF%>
<TR>
<TD width="483" align="center"><%Response.Write
compSeti("comp_ismi")%>&nbsp;  </TD>
```

```

<TD width="132" align="center"><%Response.Write compSeti("fiyat_TL")%>$</TD>
</TR>
<%compseti.MoveNext
wend %>
</TABLE>
</center>
</div>
<p align="center"><b><a href="comp_kategorileri.asp">Back to Computer
Parts</a></b></p>
<%
compSeti.Close
set compSeti=nothing
computerDB.close
set computerDB=nothing
%>
</BODY></HTML>

```

//root/kayit.asp



[Home Page](#)

[Computer Parts](#)

[Register](#)

[Members](#)

WANT TO BE MEMBER FILL IN THE BLANKS

First Name :
 Surname :
 User Name : Max 12 character
 Password : Max 12 character
 Again Password : Max 12 character
 E-mail :

kayit.asp


```

<font face="Lucida Sans Unicode" style="font-size: 11pt">E-mail&nbsp;
: </font></TD>
<TD width="391">
<INPUT maxLength=25 name=email size=33
style="HEIGHT: 22px; WIDTH: 114px"></TD></TR>
<TR>
<TD width="169">&nbsp;</TD>
<TD width="441"></TD>
<TD width="391">
<INPUT type=submit value="...: SEND :..." style="color: #000080; font-family:
Lucida Sans Unicode"><p>&nbsp;</p>
<p>&nbsp;</TD></TR></TABLE> </B>
<hr></FORM></BODY>
</HTML>

```

//root/ kayit_islem.asp



```

<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title> .....: Welcome Register :.....</title>
<!--#include virtual="sayfatop.htm"-->

```



```

</head>
<br><br>
<% @ LANGUAGE=VBScript CODEPAGE=1254 %>
<%
ad=Request.Form("ad")
soyad=Request.Form("soyad")
kullanici_ismi=Request.Form("kullanici_ad")
sifre=Request.Form("sifre")
sifre2=Request.Form("sifre2")
email=Request.Form("email")
%>
<%
if ad="" then
hata = "Please fill in the Name"
TEKRAR
Response.End
End if
if soyad="" then
hata = "Please fill in the Surname"
TEKRAR
Response.End
End if
if kullanici_ismi="" then
hata = "Please fill in the User Name"
TEKRAR
Response.End
End if
if sifre="" then
hata = "Please fill in the Password"
TEKRAR
Response.End
End if
if sifre2="" then
hata = "Please fill in the Again Password"

```

TEKRAR

Response.End

End if

if email="" then

hata = "Please fill in the E-Mail"

TEKRAR

Response.End

End if

%>

<%

if sifre=sifre2 then

set veritabani=server.CreateObject("ADODB.Connection")

veritabani.Open "computer"

veritabani_kullanici_ad="select* from uyeler where

kullanici_ismi=""&kullanici_ismi&""

set sorgu=veritabani.Execute (veritabani_kullanici_ad)

if sorgu.EOF then

SQL="insert into uyeler (ad,soyad,kullanici_ismi,sifre,email) values

("&ad&","&soyad&","&kullanici_ismi&","&sifre&","&email&")"

veritabani.Execute(SQL)%>

<h3 align="center">Thank you for your Registration</h3>

<%veritabani.Close

set veritabani=nothing

else%>

<h3 align="center">The user name was already taken, Please try another one</h3>

<p align="center">BACK</p>

<%

end if

else%>

<h3 align="center"> The passwords you entered are different from each other, Please try again</h3>

<p align="center">BACK</p>

<%end if%>

<% SUB TEKRAR %>

```

<br><br><br><table width="350" border="0" cellspacing="0" cellpadding="0"
bgcolor="#FFFFFF" align="center">
<tr>
<td>
<table width="350" border="0" cellspacing="1" cellpadding="2">
<tr>
<font face="Verdana, Arial, Helvetica, sans-serif>
<td width="100%" bgcolor="#888888" align="left" height="100%"
valign="top"><font size="2"><%=hata%><br><a href="javascript:history.back()">««
Back </a></font></td>
</tr>
</table>
<% END SUB %>
<body></html>

```

//root/sayfatop.htm



[Home Page](#)

[Computer Parts](#)

[Register](#)

[Members](#)

sayfatop.htm

```

<p align="right"></p>
<p></p><p></p><p></p><p></p><p></p>
<body bgcolor=#FFFFFF link="#000080" vlink="#000080" alink="#000080"
text="#000080">
<p align="right"></p>
<table border="0" cellpadding="0" cellspacing="0" style="border-collapse: collapse"
bordercolor="#000080" width="100%" id="AutoNumber2">

```



```

<tr>
  <td width="33%" bordercolorlight="#000080"
bordercolordark="#000080">&nbsp;<body><body>
  <SCRIPT>
  <!-- Hide from old browsers
  // All you have to do is put another text in the variable message.
  // Don't forget to break all lines with a ^
  // When you do not place a ^ at the end of all the message, the
  // message will not repeat

  message  = "
              .....: Welcome to ArSLaN Computer .....^" +
              "
              .....: ArSLaN Computer | Online Shop .....^" +
              "
              .....: Welcome Welcome Welcome Welcome
Welcome Welcome Welcome Welcome .....^" +
              "
              .....: www.arslancomputer.com .....^" +
              "
              .....: Please specify your evaluations and
recomendations about our page .....^" +
              "^"

  scrollSpeed = 10
  lineDelay  = 900
  // Do not change the text below //
  txt        = ""
  function scrollText(pos) {
    if (message.charAt(pos) != '^') {
      txt  = txt + message.charAt(pos)
      status = txt
      pauze = scrollSpeed
    }
    else {
      pauze = lineDelay
      txt  = ""
      if (pos == message.length-1) pos = -1
    }
    pos++
  }

```

```

        setTimeout("scrollText('"+pos+"')",pauze)
    }
    // Unhide -->
    scrollText(0)
    </SCRIPT></body>
</td>
    <td width="33%">
        &nbsp;<p>
</td>
        <td width="34%" align="center" valign="bottom">
            <p align="right">&nbsp;</td>
        </tr>
        <tr>
            <td width="33%" bordercolorlight="#000080" bordercolordark="#000080">&nbsp;</td>
            <td width="33%">&nbsp;</td>
            <td width="34%" align="center">&nbsp;</td>
        </tr>
    </table>
    <table border="0" cellpadding="0" cellspacing="0" style="border-collapse: collapse"
bordercolor="#111111" width="100%" id="AutoNumber1">
        <tr>
            <td width="16%" align="center">
                <strong style="font-weight: 400"><a href=" ../default.asp">
                    <font face="Lucida Sans Unicode"><span style="font-size: 11pt">Home
Page</span></font></a></strong><font><strong style="font-weight: 400"><font
face="Lucida Sans Unicode"><a href=" ../default.asp"><span style="font-size: 11pt">
</span> </a>
                </font>
            </strong>
        </font> </td>
            <td width="17%" align="center"><font><strong style="font-weight: 400">
                <font face="Lucida Sans Unicode" style="font-size: 11pt">&nbsp;<a
href=" ../comp_kategorileri.asp">Computer Parts</a>

```

```

</font>
</strong>
</font> </td>
<td width="17%" align="center"><strong style="font-weight: 400">
<a href=" ../kayit.asp">
<font face="Lucida Sans Unicode" style="font-size:
11pt">Register</font></a></strong></td>
<td width="17%" align="center"><font><strong style="font-weight: 400">
<font face="Lucida Sans Unicode" style="font-size: 11pt">&nbsp;<a
href=" ../uye_giris.asp">Members</a> </font>
</strong>
</font> </td>
</tr>
</table>

```

//root/ uye_giris.asp



[Home Page](#)

[Computer Parts](#)

[Register](#)

[Members](#)

PLEASE ENTER USER NAME AND PASSWORD

| | |
|---------------------------------------------|---------------------------------------|
| User Name : | <input type="text" value="kara"/> |
| Password : | <input type="password" value="...."/> |
| <input type="button" value="... SEND ..."/> | |

uye_giris.asp

<html>


```

<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>.....: Members Login :.....</title>
</head>
<!--#include virtual="sayfatop.htm"-->
<% if Request.QueryString("donus")="sifre" then%>
  <body link="#000080" vlink="#000080" alink="#000080" text="#000080">
  <h4 align="center"> <font color="#FF0000"><span style="font-weight: 400">
  <font face="Lucida Sans Unicode">Wrong Password</font></span></h4>
<% Elseif Request.QueryString("donus")="kullanici_ismi" then%>
  <h4 align="center"> <span style="font-weight: 400">
  <font face="Lucida Sans Unicode">Wrong User Name</font></span></font></h4>
  <p> &nbsp;</p>
  <table border="0" cellpadding="0" cellspacing="0" style="border-collapse: collapse"
bordercolor="#111111" width="100%" id="AutoNumber3">
    <tr>
      <td width="100%">
&nbsp;</td>
    </tr>
  </table>
<% end if%>
<FORM action = "uye_giris_islem.asp" method="post" >
<B>
<hr>
  <p>&nbsp;</p>
  <table border="0" cellpadding="0" cellspacing="0" style="border-collapse: collapse"
bordercolor="#111111" width="100%" id="AutoNumber2" height="1">
    <tr>
      <td width="100%" height="1" colspan="3"></td>
    </tr>
    <tr>
      <td width="30%" height="20">&nbsp;</td>
      <td width="43%" height="20">

```

PLEASE ENTER USER
NAME AND PASSWORD</td>

<td width="27%" height="20"> </td>

</tr>

</table>

<p style="margin-top: 0; margin-bottom: 0"> </p>

<table border="0" cellpadding="0" cellspacing="0" style="border-collapse: collapse"

bordercolor="#111111" width="100%" id="AutoNumber1"

bordercolordark="#000080" bordercolorlight="#000080">

<tr>

<td width="33%"> </td>

<td width="33%">

<TABLE border=1 cellPadding=2 cellSpacing=0 bgcolor=#FFFFFF width="298"

bordercolorlight="#000080" bordercolordark="#000080" style="border-collapse:

collapse" bordercolor="#111111" >

<TR>

<TD align="right" width="155">

<p align="center">User
Name :</TD>

<TD width="130">

<p align="center">

<INPUT maxLength=12 name=kullanici_ad size=22></TD>

</TR>

<TR>

<TD align="right" width="155">

<p align="center"><font face="Lucida Sans Unicode" style="font-size:
11pt">Password

:</TD>

<TD width="130">

<p align="center">

```

        <!--webbot bot="Validation" b-value-required="TRUE" i-minimum-length="4" i-
maximum-length="12" --><INPUT type=password maxLength=12 name=sifre
size=22></TD>
    </TR>
    <TR>
        <TD width="155">
            <p align="center"></TD>
            <TD width="130">
                <p align="center">
                    <INPUT type=submit value="...: SEND :..." style="color: #000080; font-family:
Lucida Sans Unicode"></TD>
            </TR>
        </TABLE>
    </td>
    <td width="34%">
        <p align="center">&nbsp;</td>
    </tr>
</table>
<B>
<p align="center" style="margin-top: 0; margin-bottom: 0">&nbsp;</p>
<p align="center" style="margin-top: 0; margin-bottom: 0">&nbsp;</p>
<p align="center" style="margin-top: 0; margin-bottom: 0">&nbsp;</p>
<hr>
</FORM>
</BODY>
</HTML>

```


//root/uye_giris_islem.asp



[Home Page](#)

[Computer Parts](#)

[Register](#)

[Members](#)

Welcome to Web Page Can

[Organize My Page](#)

[My Page](#)

[Recommendations](#)

uye_giris_islem.asp

```
<%uye_isim=Request.Form("kullanici_ad")
sifre=Request.Form("sifre")
set veritabani=Server.CreateObject("ADODB.Connection")
veritabani.open "computer"
sorgu="select * from uyeler where kullanici_ismi='"&uye_isim&'"
set uye_ismi_seti=veritabani.Execute(sorgu)
if uye_ismi_seti.EOF then
Response.Redirect "uye_giris.asp?donus=kullanici_ismi"
else
gercek_sifre=trim(uye_ismi_seti("sifre"))
if sifre=gercek_sifre then
Response.Cookies("giris")("kullanici_ismi")=uye_isim
else
Response.Redirect "uye_giris.asp?donus=sifre"
end if
end if
%>
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
```

```

<title>.....: Members Welcome :.....</title>
</head>
<!--#include virtual="sayfatop.htm"-->
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
&nbsp;<p align="center">&nbsp;</p>
<p align="center"><b><font size="4">Welcome to Web Page
<%=uye_ismi_seti("ad")%><br>
&nbsp;</font></b></p>
<table border="0" cellpadding="0" cellspacing="0" style="border-collapse: collapse"
bordercolor="#111111" width="100%" id="AutoNumber1">
<tr>
<td width="33%" align="center"><font face="Lucida Sans Unicode">
<a href="benim_sayfam/sayfami_duzenle.asp">Organize My Page</A></font></td>
<td width="33%" align="center"><font face="Lucida Sans Unicode">
<a href="benim_sayfam/sayfam.asp">My Page</A></font></td>
<td width="34%" align="center"><font><strong style="font-weight: 400">
<font face="Lucida Sans Unicode" style="font-size: 11pt"><a
href="text_stream/ziyaretc_i_defteri3.asp">Recommendations</a></font></strong></fo
nt></td>
</tr>
</table>
<p align="center" style="margin-top: 0; margin-bottom: 0">&nbsp;</p>
<p align="center" style="margin-top: 0; margin-bottom: 0">
<font face="Lucida Sans Unicode"><br>
&nbsp;</font></p>
<p align="center" style="margin-top: 0; margin-bottom: 0">
<font face="Lucida Sans Unicode"><br>
</font>
</p>
<p align="center">&nbsp;</p>
<%
uye_ismi_seti.Close
set uye_ismi_seti=nothing
veritabani.Close

```

```
set veritabani=nothing
%></BODY></HTML>
```

//ROOT/BENIM_SAYFAM

//root/benim_sayfam/sayfam.asp



[Home Page](#)

[Computer Parts](#)

[Register](#)

[Members](#)

CHOSEN ITEMS

301- AMD Duron 1000 OEM
302- AMD Athlon XP 1600+ OEM
303- AMD Athlon XP 1700+ OEM
304- Intel Pentium 4 1.5 (S478)
305- Intel Pentium 4 1.6 (S478)
306- Intel Pentium 4 1.7 (S478)
401- 20Gb Seagate/W.D/5400rpm ATA100
402- 40Gb Seagate/W.D/5400rpm ATA100
403- 60Gb Seagate/W.D/7200rpm ATA100
404- 80Gb Seagate/W.D/7200rpm ATA100
405- 100Gb Seagate/W.D/7200rpm ATA100

[Restore My Page](#)

[Continue Shopping](#)

[BACK](#)

sayfam.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>..... My Page :.....</title>
<!--#include virtual="../sayfatop.htm"-->
</head>
<br><br><br>
<%if Request.Cookies("giris")("kullanici_ismi")="" then%>
Özür dileriz, bu sayfaya girebilmek için üye olmanız gereklidir.
<a href="kayit.asp">Üye olmak için</a><br>
Zaten üye iseniz <a href="uye_giris.asp">sayfaya giriş için </a>tıklayınız.
```



```

<%else%>
<h4>CHOSEN ITEMS</h4>
<%
kullanici_ad=Request.Cookies("giris")("kullanici_ismi")
set veritabani=Server.CreateObject("ADODB.Connection")
veritabani.open "computer"
set ziyaretc_i_say=veritabani.Execute("select * from ziyaretc_i_sayfalari where
kullanici_ismi='"&kullanici_ad&"' order by kategori_id")
if ziyaretc_i_say.EOF then
ilk="insert into ziyaretc_i_sayfalari(kategori_id,kullanici_ismi) values
(0,'"&kullanici_ad&"") "
veritabani.Execute (ilk)
end if
set ziyaretc_i_kat=veritabani.Execute("select distinct(comp_kategori.comp_id) from
ziyaretc_i_sayfalari,comp_kategori where
comp_kategori.kategori_id=ziyaretc_i_sayfalari.kategori_id and
kullanici_ismi='"&kullanici_ad&"' order by comp_id" )
while not ziyaretc_i_kat.EOF
set complar=veritabani.Execute("select * from complar")
while not complar.EOF
if complar("comp_id")=ziyaretc_i_kat("comp_id")then
Response.Write ziyaretc_i_kat("comp_id")&"- "
Response.Write complar("comp_ismi")&"<BR>"
end if
complar.movenext
wend
complar.close
set complar=nothing
ziyaretc_i_kat.movenext
wend
ziyaretc_i_kat.close
set ziyaretc_i_kat=nothing
'-----comp kategorileri yordamı sonu-----
%>

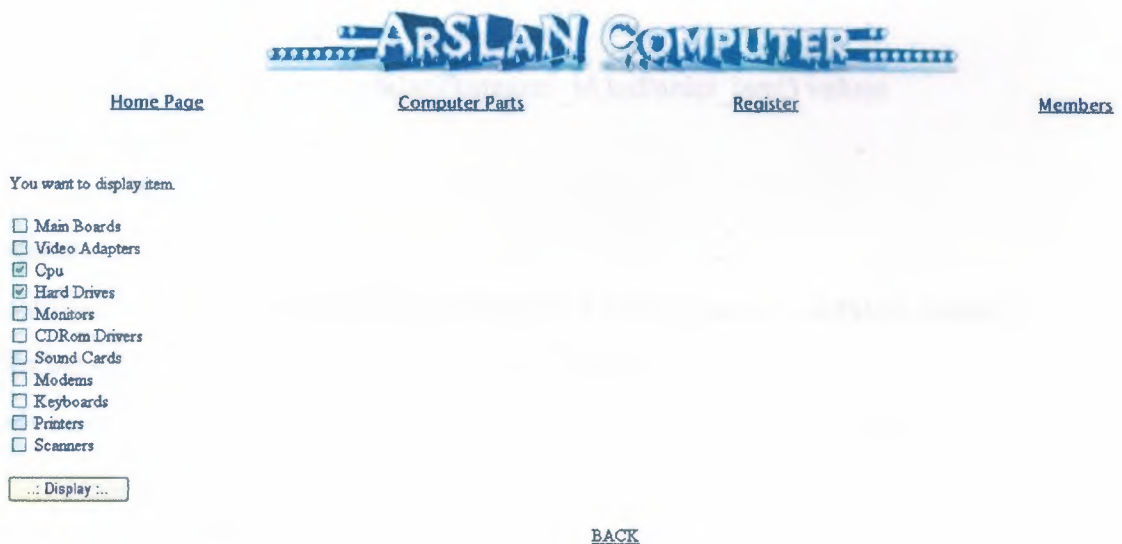
```

```

<H4><a href="sayfami_duzenle.asp">Restore My Page</A></H4>
<H4><a href=" ../comp_kategorileri.asp">Continue Shopping</A></H4>
<center><!--#include virtual=" ../comp_sayfalari/back.inc" --></center>
<%end if%>
</BODY>
</HTML>

```

//root/ benim_sayfam/sayfami_duzenle.asp



sayfami_düzenle.asp

```

<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title> ..... Restore My Page :.....</title>
<!--#include virtual=" ../sayfatop.htm" -->
<br><br><br>
</head><% @ LANGUAGE=VBScript CODEPAGE=1254 %>
<%
if Request.Cookies("giris")("kullanici_ismi")="" then%>
&nbsp;<p align="center">Sorry ! .

```

```

<a href=" ../kayit.asp">If you want to member</a><br><br><br>
Already member <a href=" ../uye_giris.asp">For login page </a>click here.
<%else%> You want to display item.<br>
</p>
<FORM ACTION="sayfami_duzenle_islem.asp" method="post">
<%
kullanici_ad=Request.Cookies("giris")("kullanici_ismi")
set veritabani=Server.CreateObject("ADODB.Connection")
veritabani.open "computer"
set ziyaretci_say=veritabani.Execute("select * from ziyaretci_sayfalari where
kullanici_ismi='"&kullanici_ad&'" order by kategori_id")
if ziyaretci_say.EOF then
ilk="insert into ziyaretci_sayfalari(kategori_id,kullanici_ismi) values
(0,'"&kullanici_ad&'" ) "
veritabani.Execute (ilk)
end if
set ziyaretci_say=veritabani.Execute("select * from ziyaretci_sayfalari where
kullanici_ismi='"&kullanici_ad&'" order by kategori_id")
set kategori=veritabani.Execute("select * from kategori order by kategori_id")
ziyaretci_say.movenext
while not kategori.EOF
%>
<INPUT TYPE="checkbox" NAME="kategori"
VALUE="<%=kategori("kategori_id")%>"
<% if not ziyaretci_say.EOF then
if kategori("kategori_id") = ziyaretci_say("kategori_id") then%>
CHECKED
<%
ziyaretci_say.MoveNext
end if
end if
%>
>
<%=kategori("kategori_ismi")%><br>

```



```

<%kategori.MoveNext
wend
set onay=veritabani.Execute("SELECT * from ziyaretci_sayfalari where
kullanici_ismi='"&kullanici_ad&" and kategori_id=0")
%>
<br>
<input type=submit value="... Display ..." style="color: #000080">
</form>
<center><!--#include virtual="../comp_sayfalari/back.inc"--></center>
<%
kategori.close
set kategori=nothing
onay.close
set onay=nothing
veritabani.Close
set veritabani=nothing
end if
%>
</BODY>
</HTML>

```

//ROOT/COMP_SAYFALARI

//root/comp_sayfalari/asus1.asp?comp_id=

asus1.asp

```

<html>
<head>

```

```

<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>.....: ArSLaN Shop :.....</title>
</head>
<!--#include virtual="../sayfatop.htm"-->
<br><br><br><br><br>
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<p></p><p></p><p></p>
<p align="center"><b><font size="5">MOTHERBOARD</font></b></p>
</BODY>
<p align="center"></p>
<center><!--#include virtual="../satis/sepet.inc"--></center>
<center><!--#include virtual="../comp_sayfalari/back.inc"--></center>
</HTML>

```

//root/comp_sayfalari/cdrom.asp?comp_id=

cdrom.asp

```

<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>.....: ArSLaN Shop :.....</title>
</head>
<!--#include virtual="../sayfatop.htm"-->
<br><br><br><br><br>
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<p></p>
<p></p>
<p align="center"><font size="5"><b>CDRom</b></font></p>
</BODY>

```

```

<p align="center"></p>
<center><!--#include virtual="../../satis/sepet.inc"--></center>
<center><!--#include virtual="../../comp_sayfalari/back.inc"--></center>
</HTML>

```

//root/comp_sayfalari/cpu.asp?comp_id=

cpu.asp

```

<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>.....: ArSLaN Shop :.....</title>
</head>
<!--#include virtual="../../sayfatop.htm"-->
<br><br><br><br><br>
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<p></p>
<p></p>
<p align="center"><font size="5"><b>AMD CPU</b></font></p>
</BODY>
<p align="center"></p>
<center><!--#include virtual="../../satis/sepet.inc"--></center>
<center><!--#include virtual="../../comp_sayfalari/back.inc"--></center>
</HTML>

```


//root/comp_sayfalari/ekran.asp?comp_id=

ekran.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>.....: ArSLaN Shop :.....</title>
</head>
<!--#include virtual="../sayfatop.htm"-->
<br><br><br><br><br>
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<p></p><p></p>
<p align="center"><b><font size="5">VIDEO CARD</font></b></p>
</BODY>
<p align="center"></p>
<center><!--#include virtual="../satis/sepet.inc"--></center>
<center><!--#include virtual="../comp_sayfalari/back.inc"--></center>
</HTML>
```

//root/comp_sayfalari/harddisk.asp?comp_id=

harddisk.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>.....: ArSLaN Shop :.....</title>
</head>
<!--#include virtual="../sayfatop.htm"-->
<br><br><br><br><br>
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
```

```

<p></p>
<p></p>
<p align="center"><font size="5"><b>HARD DRIVES</b></font></p>
</BODY>
<p align="center"></p>
<center><!--#include virtual="../satis/sepet.inc"--></center>
<center><!--#include virtual="../comp_sayfalari/back.inc"--></center>
</HTML>

```

//root/comp_sayfalari/keyboard.asp?comp_id=

keyboard.asp

```

<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>.....: ArSLaN Shop :.....</title>
</head>
<!--#include virtual="../sayfatop.htm"-->
<br><br><br><br><br>
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<p></p>
<p></p>
<p align="center"><font size="5"><b>KEYBOARD</b></font></p>
</BODY>
<p align="center"></p>
<center><!--#include virtual="../satis/sepet.inc"--></center>
<center><!--#include virtual="../comp_sayfalari/back.inc"--></center>
</HTML>

```

//root /comp_sayfalari/modem.asp?comp_id=

modem.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>.....: ArSLaN Shop :.....</title>
</head>
<!--#include virtual="../sayfatop.htm"-->
<br><br><br><br><br>
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<p></p>
<p></p>
<p align="center"><font size="5"><b>MODEM</b></font></p>
</BODY>
<p align="center"></p>
<center><!--#include virtual="../satis/sepet.inc"--></center>
<center><!--#include virtual="../comp_sayfalari/back.inc"--></center>
</HTML>
```

//root/comp_sayfalari/monitor.asp?comp_id=

monitor.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>.....: ArSLaN Shop :.....</title>
</head>
<!--#include virtual="../sayfatop.htm"-->
```



```

<br><br><br><br><br>
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<p></p><p></p>
<p align="center"><font size="5"><b>MONITOR</b></font></p>
</BODY>
<p align="center"></p>
<center><!--#include virtual="../satis/sepet.inc"--></center>
<center><!--#include virtual="../comp_sayfalari/back.inc"--></center>
</HTML>

```

//root /comp_sayfalari/printer.asp?comp_id=

printer.asp

```

<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>.....: ArSLaN Shop :.....</title>
</head>
<!--#include virtual="../sayfatop.htm"-->
<br><br><br><br><br>
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<p></p>
<p></p>
<p align="center"><font size="5"><b>HP 640C PRINTER</b></font></p>
</BODY>
<p align="center"></p>
<center><!--#include virtual="../satis/sepet.inc"--></center>
<center><!--#include virtual="../comp_sayfalari/back.inc"--></center>
</HTML>

```

//root/comp_sayfalari/scanner.asp?comp_id=

scanner.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>.....: ArSLaN Shop :.....</title>
</head>
<!--#include virtual="../sayfatop.htm"-->
<br><br><br><br><br>
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<p></p>
<p></p>
<p align="center"><font size="5"><b>SCANNER</b></font></p>
</BODY>
<p align="center"></p>
<center><!--#include virtual="../satis/sepet.inc"--></center>
<center><!--#include virtual="../comp_sayfalari/back.inc"--></center>
</HTML>
```

//root/comp_sayfalari/sound.asp?comp_id=

sound.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>.....: ArSLaN Shop :.....</title>
</head>
<!--#include virtual="../sayfatop.htm"-->
```

```

<br><br><br><br><br>
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<p></p>
<p></p>
<p align="center"><font size="5"><b>SOUND CARD</b></font></p>
</BODY>
<p align="center"></p>
</BODY>
<p align="center">&nbsp;</p>
<center><!--#include virtual="../satis/sepet.inc"--></center>
<center><!--#include virtual="../comp_sayfalari/back.inc"--></center>
</HTML>
</HTML>

```

//root /comp_sayfalari/back.inc

```

<p><center><a href="javascript:history.go(-1)">BACK</a></center></p>

```

//ROOT/SATIS

//root/satis/sepet.asp

```

<%comp_id=Request.QueryString("comp_id")
Response.Write comp_id
%>

```

//root/satis/sepet.inc

```

<%comp_id=Request.QueryString("comp_id")%>
<a href="../satis/sepete_ekle.asp?comp_id=<%=comp_id%>">Add Basket</a>

```


//root/satis/sepet_ekle.asp



[Home Page](#)

[Computer Parts](#)

[Register](#)

[Members](#)

HP 1200 Laser

| | | |
|--------------------------------|----------------------------|------------------------------------|
| 1 | Add Basket | <input type="button" value="ADD"/> |
| Display Basket | | |

sepet_ekle.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>.....: Add to the Basket :.....</title>
</head><% @ LANGUAGE=VBScript CODEPAGE=1254 %>
<!--#include virtual="../sayfatop.htm"-->
<br><br><br><br><br><br>
<body><center>
<%
comp_id=Request.QueryString("comp_id")
set veritabani=Server.CreateObject("ADODB.Connection")
veritabani.open "computer"
comp=veritabani.Execute("select * from complar where
cstr(comp_id)='"&comp_id&'"")
Response.Write "<h4>"&comp("comp_ismi")&" "
%>&nbsp;   </center></p>
</h4>
<div align="center">
<center>
<TABLE WIDTH="100%" style="border-collapse: collapse" bordercolor="#111111"
cellpadding="0" cellspacing="0">
```


//root/satis/sepete_ekle_islem.asp



[Home Page](#)

[Computer Parts](#)

[Register](#)

[Members](#)

The Item was Added.

[Back to Computer Parts](#)

[Display Basket](#)

sepete_ekle_islem.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>.....: Add to the Basket :.....</title>
</head><% @ LANGUAGE=VBScript CODEPAGE=1254 %>
<!--#include virtual="../sayfatop.htm"-->
<br><br><br><br>
<%
Sub YeniSiparis
Application.Lock
Session("siparis_id")=Application("siparis_id")
s_siparis_id=cstr(Session("siparis_id"))
Application("siparis_id")=Application("siparis_id")+1
Application.Unlock
end sub

Sub SiparisEkle(d_siparis_id,d_comp_id,d_adet)
SQLsorgu="insert into siparis_kalemleri (siparis_id,comp_id,adet) values
("&d_siparis_id&", "&d_comp_id&", "&d_adet&")"
veritabani.Execute(SQLsorgu)
end sub
```



```

comp_id=Request.Form("comp_id")
adet=Request.Form("adet")
set veritabani = Server.CreateObject("ADODB.Connection")
    veritabani.Open "computer"
    s_siparis_id=cstr(Session("siparis_id"))
    if s_siparis_id="" then
YeniSiparis
end if
set siparis_tek=veritabani.Execute("select * from siparis_kalemleri where
cstr(siparis_id)='"&s_siparis_id&'" and cstr(comp_id)='"&comp_id&'"")
if not siparis_tek.EOF then%>
This item has already put in to your basket. If you want to buy more from
this item<br>
Please <a href="sepete_gozat.asp"> after clicking here</a> identify the number you
want to buy on the
number section.<br>
<a href=" ../comp_kategorileri.asp">Click for Computer Categories</a>
<%else
SiparisEkle s_siparis_id,comp_id,adet
'veritabani.Execute ("insert into siparisler (siparis_id) values ("&s_siparis_id&")")
%>
<TABLE WIDTH="100%">
<TR>
<TD ALIGN="center">
    <h4>The Item was Added.</h4>
    <P><a href=" ../comp_kategorileri.asp">Back to Computer Parts</a>
    <P><a href="sepete_gozat.asp">Display Basket</a>
    <P></TD><TD><P></TD></TR></TABLE>
<% end if
    veritabani.Close
    set veritabani = Nothing
%>
</body></html>

```

//root/satis/sepete_gozat.asp



[Home Page](#)

[Computer Parts](#)

[Register](#)

[Members](#)

BASKET

Please check your basket. write the number on the number section to get a product out of basket

| Computer Part Name | Unit | Unit Price | Unit Total |
|--------------------|------|------------|------------|
| HP 1200 Laser | 1 | 56,00\$ | 56,00\$ |
| Total | | | 56,00\$ |

... Refresh Total Order ...

[Continue shopping](#)

sepete_gozat.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>.....: Display Basket :.....</title>
</head><% @ LANGUAGE=VBScript CODEPAGE=1254 %>
<!--#include virtual="../sayfatop.htm"-->
<!--#include virtual="../adovbs.inc"-->
<br><br><br><br>
<%
    set veritabani = Server.CreateObject("ADODB.Connection")
    veritabani.Open "computer"
    if cstr(Session("siparis_id")) = "" then%>
        <body link="#000080" vlink="#000080" alink="#000080" text="#000080">
            There is still no available order or your session expired.<p>
            <a href="../comp_kategorileri.asp">select an item for your order.</a>
        <% else
            s_siparis_id = cstr(Session("siparis_id"))
            sqlText = "select complar.comp_id, complar.ismi, " _
                & "fiyat_TL,adet from complar, " _
                & "siparis_kalemleri where " _
                & "complar.comp_id = siparis_kalemleri.comp_id "
```

```
& "and siparis_kalemleri.siparis_id = " & s_siparis_id  
%>
```

```
<H2>BASKET</H2>
```

Please check your basket. write the number on the number section to get a product out of basket.

```
<FORM ACTION="sepete_gozat_islem.asp" METHOD="post">
```

```
<TABLE border=1 WIDTH="100%" bgcolor=#C0C0C0 style="border-collapse:  
collapse" bordercolor="#111111" cellpadding="2" bordercolorlight="#000080"  
bordercolordark="#000080">
```

```
<TR>
```

```
<TH ALIGN="left">Computer Part Name</TH>
```

```
<TH ALIGN="left">Unit</TH>
```

```
<TH ALIGN="left">Unit Price</TH>
```

```
<TH ALIGN="left">Unit Total</TH>
```

```
</TR>
```

```
<% set gozatSet = veritabani.Execute(sqlText)
```

```
while not gozatSet.EOF
```

```
    d_comp_id = gozatSet("comp_id")
```

```
    d_comp_ismi = gozatSet("comp_ismi")
```

```
    d_fiyat = gozatSet("fiyat_TL")
```

```
    d_adet = gozatSet("adet")
```

```
    d_toplam = d_toplam + (d_adet * d_fiyat)
```

```
%>
```

```
<TR>
```

```
<TD>
```

```
<%=d_comp_ismi%> &nbsp;   </TD>
```

```
<TD>
```

```
<INPUT NAME="quant<%=d_comp_id%>" TYPE="text"
```

```
    SIZE=10 SIZE=10 VALUE="<%=d_adet%>" maxlength="10">
```

```
</TD>
```

```
<TD align=ALIGN="right">
```

```
<%= formatNumber(d_fiyat, 2) %>$
```

```
</TD><TD align=ALIGN="right">
```

```
<%= formatNumber((d_adet * d_fiyat)) %>$</TD>
```



```

        </TR>
    <%
        gozatSet.MoveNext
    wend
    gozatSet.Close
    set gozatSet = Nothing
%>
    <TR>
        <TD>Total:</TD>
        <TD COLSPAN="3" ALIGN="right">
            <%= formatNumber(d_toplam,2) %>$
        </TD>
    </TR>
</TABLE>
    <INPUT TYPE="submit" NAME="buton" VALUE="..: Refresh Total .."
style="color: #000080">
    <INPUT TYPE="submit" NAME="buton" VALUE="..: Order .." style="color:
#000080">
    </FORM>
    <p align="center"><a href=" ../comp_kategorileri.asp">Continue
shopping</a></p>
    <%
        end if
    veritabani.Close
    set veritabani = Nothing
%>
</BODY>
</HTML>

```

//root/satis/sepete_gozat_islem.asp



[Home Page](#)

[Computer Parts](#)

[Register](#)

[Members](#)

ORDER

[Change Order](#)

| Code | Computer Part Name | Unit | Unit Price | Unit Total |
|-----------------|------------------------------|------|------------|------------|
| 1003 | HP 1200 Laser | 1 | \$56,00 | \$56,00 |
| 505 | 19" Hitachi CM721 Flat (.21) | 1 | \$36,00 | \$36,00 |
| Bottom Total : | | | | \$92,00 |
| Transport (5%): | | | | \$4,60 |
| Total : | | | | \$96,60 |

Order Info

| | |
|----------------------------------------------------------------------------------------------------|-------------------------------|
| Name | Can |
| Surname: | Arslan |
| Address1: | Hastane Kargisi Levant Sitesi |
| Address2: | No: 28/4 |
| City : | Lefkoşa |
| Zip Code : | Mersin 10 |
| Telephone Number : | 05338663455 |
| <input type="radio"/> MasterCard <input type="radio"/> Visa <input type="radio"/> American Express | |
| Card Number : | 1234 1234 1234 1234 |
| On Card Name : | Can Arslan |
| <input type="button" value="... ORDER ..."/> | |

[BACK](#)

sepete_gozat_islem.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>.....: Order Page :.....</title>
</head>
<%@ LANGUAGE="VBSCRIPT" %>
<!--#include virtual="../adovbs.inc"-->
<%
set veritabani = Server.CreateObject("ADODB.Connection")
veritabani.Open "computer"
if cstr(Session("siparis_id")) = "" then
%>
```



```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>.....: Order Page :.....</title>
</head>
<!--#include virtual="../sayfatop.htm"-->
<br><br><br>
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<p align="center">There is still no available order or your session expired.</p>
<p align="center">
Please choose one computer part for order.
</BODY>
</HTML>
<% else
s_siparis_id= cstr(Session("siparis_id"))
set compSet = Server.CreateObject("ADODB.RecordSet")
compSet.Open "select * from siparis_kalemleri " _
& "where siparis_id=" & s_siparis_id, _
veritabani, adOpenDynamic, adLockPessimistic, adCmdText
while not compSet.EOF
d_gecis = "quant" & compSet("comp_id")
d_adet = Request.form(d_gecis)
if d_adet <> "" and isNumeric(d_adet) then
if d_adet = 0 then
compSet.Delete
else
compSet("adet") = d_adet
end if
end if
compSet.Update
compSet.MoveNext
wend
if Request.form("buton") = "...: Refresh Total ..." then
```



```

set comp_tanSet = Server.CreateObject("ADODB.RecordSet")
comp_tanSet.Open "complar", veritabani, _
    adOpenStatic, adLockOptimistic, adCmdTable
d_toplam = 0
compSet.MoveFirst
while not compSet.EOF
    comp_tanSet.MoveFirst
    comp_tanSet.Find "comp_id = " & compSet("comp_id")
    d_comp_id = compSet("comp_id")
    d_comp_ismi = comp_tanSet("comp_ismi")
    d_fiyat = formatNumber( comp_tanSet("fiyat_TL"), 2)
    d_adet = compSet("adet")
    d_birimTutar = formatNumber((d_fiyat * d_adet), 2)
    d_toplam = d_toplam + d_birimTutar

%>

<TR>
    <TD width="55"><%= d_comp_id%>&nbsp;</TD>
    <TD width="376"><%= d_comp_ismi %>&nbsp;</TD>
    <TD width="32"><%= d_adet %>&nbsp;</TD>
    <TD ALIGN="right" width="81">$<%= d_fiyat %></TD>
    <TD ALIGN="right" width="78">$<%= d_birimTutar %></TD>
</TR>
<INPUT TYPE="hidden" NAME="siparisler_id"
    VALUE="<%=d_comp_id%>,<%=d_adet%>">

<%

    compSet.MoveNext
wend

%>

<TR>
    <TD COLSPAN = 4 width="254"> Bottom Total :</TD>
    <TD ALIGN=right width="78">
        $<%= formatNumber(d_toplam, 2) %>
    </TD>
</TR>

```

```

<TR>
  <TD COLSPAN = 4 width="254"> Transport&nbsp;(5%):</TD>
  <TD ALIGN=right width="78">
    $<%= formatNumber((d_toplam*.05), 2) %>
    <INPUT TYPE="hidden" NAME="d_ulasım"
      VALUE="<%=d_toplam*.05%>">
  </TD>
</TR>
<TR>
<TR>
  <TD COLSPAN = 4 width="254"> Total :</TD>
  <TD ALIGN=right width="78">
    $<%= formatNumber((d_toplam*1.05), 2) %>
    <INPUT TYPE="hidden" NAME="d_toplam"
      VALUE="<%=d_toplam%>">
  </TD>
</TR>
</TABLE>
</center>
</div>
<P>
<H3 align="center">Order Info</H3>
<div align="center">
  <center>
    <TABLE bgcolor=#C0C0C0 style="border-collapse: collapse"
bordercolor="#111111" cellpadding="2" width="457">
      <TR>
        <TD width="216">Name :</TD>
        <TD width="233">
          <INPUT TYPE="text" NAME="ad" SIZE="35"></TD>
        </TR>
      <TR>
        <TD width="216">Surname:</TD>
        <TD width="233">
          <INPUT TYPE="text" NAME="soyad" SIZE="35">

```

```

</TD>
</TR>
<TR>
  <TD width="216">Address1:</TD>
  <TD width="233">
    <INPUT TYPE="text" NAME="adres1" SIZE=45>
  </TD>
</TR>
<TR>
  <TD width="216">Address2:</TD>
  <TD width="233">
    <INPUT TYPE="text" NAME="adres2" SIZE=45>
  </TD>
</TR>
<TR>
  <TD width="216">City :</TD>
  <TD width="233">
    <INPUT TYPE="text" NAME="sehir" SIZE=25></TD>
</TR>
<TR>
  <TD width="216">Zip Code :</TD>
  <TD width="233">
    <INPUT TYPE="text" NAME="postakodu" SIZE=18>
  </TD>
</TR>
<TR>
  <TD width="216">Telephone Number :</TD>
  <TD width="233">
    <INPUT TYPE="text" NAME="tel" SIZE=25>
  </TD>
</TR>
<TR>
  <TD COLSPAN=2 width="383">
    <hr>

```


//root/satis/siparis_ekle.asp



[Home Page](#)

[Computer Parts](#)

[Register](#)

[Members](#)

HP 1200 Laser

| | | |
|----------------|------------|-----|
| 1 | Add Basket | ADD |
| Display Basket | | |

siparis_ekle.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>.....: Add Order :.....</title>
</head>
<!--#include virtual="./adovbs.inc"-->
<!--#include virtual="./sayfatop.htm"-->
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<%
    set veritabani = Server.CreateObject("ADODB.Connection")
    veritabani.Open "computer"
    s_siparis_id = Request.form("s_siparis_id")
    veritabani.Execute ("insert into siparisler (siparis_id) values ("&s_siparis_id&")")
    set siparisSet = Server.CreateObject("ADODB.RecordSet")
    siparisSet.Open "select * from siparisler where siparis_id = " _
        & s_siparis_id, veritabani, adOpenStatic, adLockOptimistic, _
        adCmdText
    if siparisSet.EOF then
        Response.Write "Siparişinizle ilgili problem tespit edilmiştir. "
        Response.Write "Lütfen satış servisimizle temasa geçiniz."
    else
```

```

siparisSet("nakliye") = Request.form("d_ulasim")
siparisSet("ad") = Request.form("ad")
siparisSet("soy_ad") = Request.form("soyad")
siparisSet("adres1") = Request.form("adres1")
siparisSet("adres2") = Request.form("adres2")
siparisSet("sehir") = Request.form("sehir")
siparisSet("posta_kodu") = Request.form("postakodu")
siparisSet("tel") = Request.form("tel")
siparisSet("kk_tip") = Request.form("kk_tipi")
siparisSet("kk_num") = Request.form("kk_numarasi")
siparisSet("kk_ustundeki_isim") = _
    Request.form("kk_ust_isim")
siparisSet("durum") = "OKEY"
siparisSet.Update
veritabani.Execute("delete from siparis_kalemleri where " & "siparis_id = " &
s_siparis_id)
set itemSet = Server.CreateObject("ADODB.RecordSet")
itemSet.Open "siparis_kalemleri", veritabani, adOpenStatic, adLockOptimistic,
adCmdTable
for each item in Request.form("siparisler_id")
    siparisler_id = cstr(item)
    siparisbilgi = split(siparisler_id, ",")
    itemSet.addNew
    itemSet("siparis_id") = s_siparis_id
    itemSet("comp_id") = siparisbilgi(0)
    itemSet("adet") = siparisbilgi(1)
    itemSet.Update
next
itemSet.Close
set itemSet = Nothing
Session.abandon
%>
<p align="center">
<b>Order will be delivered after 10 workdays .

```



```

</b>
</p>
<P align="center">
<b>Thank you for order ArSLaN Computer!
<%
end if
    siparisSet.Close
    set siparisSet = Nothing
    veritabani.Close
    set veritabani = Nothing
%> </b>
<p align="center">&nbsp;<p align="center"><Button
OnClick="javascript:window.close()">... Exit ...</button></p></p>
</BODY>
</HTML>

```

//ROOT/TEXT_STREAM


//root/text_stream/oneri.asp

```

<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
</head>
<% @ LANGUAGE=VBScript CODEPAGE=1254 %>
<!--#include virtual="../sayfatop.htm"-->
<%
Response.Write"<b> Recommendations saved.</b><br>"
Response.Write"<b> Thank You.</b><br>"
%>
<p><a href="ziyaretc_i_defteri3.asp">Back to Recommendations Page</a></p>
</body></html>


```


//root/text_stream/ziyaretci_defteri3.asp



[Home Page](#)[Computer Parts](#)[Register](#)[Members](#)


Please specify your evaluations and recommendations about our page.



Name:

Surname:

Recommendations:



Please specify your evaluations and recommendations about our page.

Previous Ideas and Recommendations

Can Arslan
08.01.2002
Asp' de web sayfası yapmak çok güzel

Kaya Taşkaya
08.01.2002
Sayfalar çok güzel olmuş

Aygenur Ortaç
09.01.2002
Çok güzel bir site olmuş

Hakan Çoruh
09.01.2002
Sayfayı beğendim

ziyaretci_defteri3.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title> .....: Evaluations and Recommendations :.....</title>
</head>
<% @ LANGUAGE=VBScript CODEPAGE=1254 %>
<!--#include virtual="./sayfatop.htm"-->

<%
oneri=Server.HtmlEncode(Request.Form("oneri"))
ad=Server.HtmlEncode(Request.Form("ad"))
soyad=Server.HtmlEncode(Request.Form("soyad"))
tarih=date()
```

```
<FORM action = "ziyaretci_defteri3.asp" method="post">
```

bordercolor="#111111" width="100%" id="AutoNumber1">

 <td width="105%" colspan="4"> | | | | | | | | | | | |

evaluations and recommendations about our page.

 | | | `<font face="Lucida Sans Unicode" style="font-size:` |

```

        <INPUT Name="ad" Value="<%=ad%>" size="25" maxlength=12 style="font-
family: Lucida Sans Unicode; color: #000080"></td>
    </tr>
    <tr>
        <td width="9%"><font face="Lucida Sans Unicode" style="font-size:
11pt">Surname:&nbsp;&nbsp;&nbsp;</font></td>
        <td width="50%">
            <INPUT Name="soyad" Value="<%=soyad%>" size="25" maxlength=12
style="font-family: Lucida Sans Unicode; color: #000080" ></td>
        </tr>
        <tr>
            <td width="9%"><font face="Lucida Sans Unicode" style="font-size:
11pt">Recommendations:</font></td>
            <td width="50%">
                <INPUT Name="oneri" Value="<%=oneri%>" size="10" maxlength=100
style="HEIGHT: 22px; WIDTH: 470px; font-family:Lucida Sans Unicode;
color:#000080"></td>
            </tr>
            <tr>
                <td width="9%">&nbsp;</td>
                <td width="50%">
<p style="margin-top: 0; margin-bottom: 0">
<INPUT type="submit" value="... SEND ..." id=submit1 name=submit1 style="color:
#000080; font-family: Lucida Sans Unicode"></p>
<p style="margin-top: 0; margin-bottom: 0">&nbsp;</td>
            </tr>
        </table>
        <hr>
        </FORM>
        <%
Set dn=Server.CreateObject("Scripting.FileSystemObject")
Set Setdn=dn.OpenTextFile(Server.MapPath("ziyaretci_oneri.txt"), 8)
if oneri="" then

```



```
Response.Write "<b>Please specify your evaluations and recommendations about our  
page.</b>"
```

```
else
```

```
if ad="" then
```

```
Response.Write "<b>Lütfen isminizi girin.</b>"
```

```
else
```

```
if soyad="" then
```

```
Response.Write "<b>Lütfen soyadınızı girin.</b>"
```

```
else
```

```
Setdn.WriteLine "<b>"&ad&" "&soyad&"</b><br>"
```

```
Setdn.WriteLine "<b>"&tarih&"</b><br>"
```

```
Setdn.WriteLine oneri
```

```
Setdn.WriteLine "<br><hr>"
```

```
Response.Redirect "oneri.asp"
```

```
Response.Write"Teşekkür ederiz."
```

```
Setdn.Close
```

```
Set Setdn=Nothing
```

```
Set dn=Nothing
```

```
end if
```

```
end if
```

```
end if
```

```
%>
```

```
<p align="center"><FONT color=orangered size=4><STRONG>Previous Ideas and  
Recommendations </STRONG></FONT></p>
```

```
<table border="0" cellpadding="0" cellspacing="0" style="border-collapse: collapse"  
bordercolor="#111111" width="100%" id="AutoNumber2">
```

```
<tr>
```

```
<td width="100%">
```

```
<hr>
```

```
</td>
```

```
</tr>
```

```
</table>
```

```
<p><!--#include virtual="../text_stream/ziyaretci_oneri.txt"--></p>
```

```
<center><!--#include virtual="../comp_sayfalari/back.inc"--></center>
```

</body></html>

//root/text_stream/ziyaretci_oneri.txt

Can Arslan

08.01.2002

Asp' de web sayfası yapmak çok güzel

<hr>

Kaya Taşkaya

08.01.2002

Sayfanız çok güzel olmuş

<hr>

Ayşenur Ortaç

09.01.2002

Çok güzel bir site olmuş

<hr>

Hakan Çoruh

09.01.2002

Sayfanı beğendim

<hr>

ADO.INC

<%

'-----

' Microsoft ADO

'

' Copyright (c) 1996-1998 Microsoft Corporation.

'

' ADO constants include file for VBScript

'-----

'---- CursorTypeEnum Values ----

Const adOpenForwardOnly = 0

Const adOpenKeyset = 1

Const adOpenDynamic = 2

Const adOpenStatic = 3

'---- CursorOptionEnum Values ----

Const adHoldRecords = &H00000100

Const adMovePrevious = &H00000200

Const adAddNew = &H01000400

Const adDelete = &H01000800

Const adUpdate = &H01008000

Const adBookmark = &H00002000

Const adApproxPosition = &H00004000

Const adUpdateBatch = &H00010000

Const adResync = &H00020000

Const adNotify = &H00040000

Const adFind = &H00080000

Const adSeek = &H00400000

Const adIndex = &H00800000

'---- LockTypeEnum Values ----

Const adLockReadOnly = 1

Const adLockPessimistic = 2

Const adLockOptimistic = 3

Const adLockBatchOptimistic = 4

'---- ExecuteOptionEnum Values ----

Const adAsyncExecute = &H00000010
Const adAsyncFetch = &H00000020
Const adAsyncFetchNonBlocking = &H00000040
Const adExecuteNoRecords = &H00000080
Const adExecuteStream = &H00000400

'---- ConnectOptionEnum Values ----

Const adAsyncConnect = &H00000010

'---- ObjectStateEnum Values ----

Const adStateClosed = &H00000000
Const adStateOpen = &H00000001
Const adStateConnecting = &H00000002
Const adStateExecuting = &H00000004
Const adStateFetching = &H00000008

'---- CursorLocationEnum Values ----

Const adUseServer = 2
Const adUseClient = 3

'---- DataTypeEnum Values ----

Const adEmpty = 0
Const adTinyInt = 16
Const adSmallInt = 2
Const adInteger = 3
Const adBigInt = 20
Const adUnsignedTinyInt = 17
Const adUnsignedSmallInt = 18
Const adUnsignedInt = 19
Const adUnsignedBigInt = 21
Const adSingle = 4
Const adDouble = 5
Const adCurrency = 6
Const adDecimal = 14

Const adNumeric = 131
Const adBoolean = 11
Const adError = 10
Const adUserDefined = 132
Const adVariant = 12
Const adIDispatch = 9
Const adIUnknown = 13
Const adGUID = 72
Const adDate = 7
Const adDBDate = 133
Const adDBTime = 134
Const adDBTimeStamp = 135
Const adBSTR = 8
Const adChar = 129
Const adVarChar = 200
Const adLongVarChar = 201
Const adWChar = 130
Const adVarWChar = 202
Const adLongVarWChar = 203
Const adBinary = 128
Const adVarBinary = 204
Const adLongVarBinary = 205
Const adChapter = 136
Const adFileTime = 64
Const adPropVariant = 138
Const adVarNumeric = 139
Const adArray = &H2000

'---- FieldAttributeEnum Values ----'

Const adFldMayDefer = &H00000002
Const adFldUpdatable = &H00000004
Const adFldUnknownUpdatable = &H00000008
Const adFldFixed = &H00000010
Const adFldIsNullable = &H00000020

Const adFldMayBeNull = &H00000040
Const adFldLong = &H00000080
Const adFldRowID = &H00000100
Const adFldRowVersion = &H00000200
Const adFldCacheDeferred = &H00001000
Const adFldIsChapter = &H00002000
Const adFldNegativeScale = &H00004000
Const adFldKeyColumn = &H00008000
Const adFldIsRowURL = &H00010000
Const adFldIsDefaultStream = &H00020000
Const adFldIsCollection = &H00040000

'---- EditModeEnum Values ----

Const adEditNone = &H0000
Const adEditInProgress = &H0001
Const adEditAdd = &H0002
Const adEditDelete = &H0004

'---- RecordStatusEnum Values ----

Const adRecOK = &H00000000
Const adRecNew = &H00000001
Const adRecModified = &H00000002
Const adRecDeleted = &H00000004
Const adRecUnmodified = &H00000008
Const adRecInvalid = &H00000010
Const adRecMultipleChanges = &H00000040
Const adRecPendingChanges = &H00000080
Const adRecCanceled = &H00001000
Const adRecCantRelease = &H00004000
Const adRecConcurrencyViolation = &H00008000
Const adRecIntegrityViolation = &H00010000
Const adRecMaxChangesExceeded = &H00020000
Const adRecObjectOpen = &H00040000
Const adRecOutOfMemory = &H00080000

Const adRecPermissionDenied = &H0010000
Const adRecSchemaViolation = &H0020000
Const adRecDBDeleted = &H0040000

'---- GetRowsOptionEnum Values ----
Const adGetRowsRest = -1

'---- PositionEnum Values ----
Const adPosUnknown = -1
Const adPosBOF = -2
Const adPosEOF = -3

'---- BookmarkEnum Values ----
Const adBookmarkCurrent = 0
Const adBookmarkFirst = 1
Const adBookmarkLast = 2

'---- MarshalOptionsEnum Values ----
Const adMarshalAll = 0
Const adMarshalModifiedOnly = 1

'---- AffectEnum Values ----
Const adAffectCurrent = 1
Const adAffectGroup = 2
Const adAffectAllChapters = 4

'---- ResyncEnum Values ----
Const adResyncUnderlyingValues = 1
Const adResyncAllValues = 2

'---- CompareEnum Values ----
Const adCompareLessThan = 0
Const adCompareEqual = 1
Const adCompareGreaterThan = 2

Const adCompareNotEqual = 3

Const adCompareNotComparable = 4

'---- FilterGroupEnum Values ----

Const adFilterNone = 0

Const adFilterPendingRecords = 1

Const adFilterAffectedRecords = 2

Const adFilterFetchedRecords = 3

Const adFilterConflictingRecords = 5

'---- SearchDirectionEnum Values ----

Const adSearchForward = 1

Const adSearchBackward = -1

'---- PersistFormatEnum Values ----

Const adPersistADTG = 0

Const adPersistXML = 1

'---- StringFormatEnum Values ----

Const adClipString = 2

'---- ConnectPromptEnum Values ----

Const adPromptAlways = 1

Const adPromptComplete = 2

Const adPromptCompleteRequired = 3

Const adPromptNever = 4

'---- ConnectModeEnum Values ----

Const adModeUnknown = 0

Const adModeRead = 1

Const adModeWrite = 2

Const adModeReadWrite = 3

Const adModeShareDenyRead = 4

Const adModeShareDenyWrite = 8

Const adModeShareExclusive = &Hc
Const adModeShareDenyNone = &H10
Const adModeRecursive = &H400000

'---- RecordCreateOptionsEnum Values ----

Const adCreateCollection = &H00002000
Const adCreateStructDoc = &H80000000
Const adCreateNonCollection = &H00000000
Const adOpenIfExists = &H02000000
Const adCreateOverwrite = &H04000000
Const adFailIfNotExists = -1

'---- RecordOpenOptionsEnum Values ----

Const adOpenRecordUnspecified = -1
Const adOpenOutput = &H00800000
Const adOpenAsync = &H00001000
Const adDelayFetchStream = &H00004000
Const adDelayFetchFields = &H00008000
Const adOpenExecuteCommand = &H00010000

'---- IsolationLevelEnum Values ----

Const adXactUnspecified = &Hffffff
Const adXactChaos = &H00000010
Const adXactReadUncommitted = &H00000100
Const adXactBrowse = &H00000100
Const adXactCursorStability = &H00001000
Const adXactReadCommitted = &H00001000
Const adXactRepeatableRead = &H00010000
Const adXactSerializable = &H00100000
Const adXactIsolated = &H00100000

'---- XactAttributeEnum Values ----

Const adXactCommitRetaining = &H00020000
Const adXactAbortRetaining = &H00040000

'---- PropertyAttributesEnum Values ----

Const adPropNotSupported = &H0000

Const adPropRequired = &H0001

Const adPropOptional = &H0002

Const adPropRead = &H0200

Const adPropWrite = &H0400

'---- ErrorValueEnum Values ----

Const adErrProviderFailed = &Hbb8

Const adErrInvalidArgument = &Hbb9

Const adErrOpeningFile = &Hbba

Const adErrReadFile = &Hbbb

Const adErrWriteFile = &Hbbc

Const adErrNoCurrentRecord = &Hbcd

Const adErrIllegalOperation = &Hc93

Const adErrCantChangeProvider = &Hc94

Const adErrInTransaction = &Hcae

Const adErrFeatureNotAvailable = &Hcb3

Const adErrItemNotFound = &Hcc1

Const adErrObjectInCollection = &Hd27

Const adErrObjectNotSet = &Hd5c

Const adErrDataConversion = &Hd5d

Const adErrObjectClosed = &He78

Const adErrObjectOpen = &He79

Const adErrProviderNotFound = &He7a

Const adErrBoundToCommand = &He7b

Const adErrInvalidParamInfo = &He7c

Const adErrInvalidConnection = &He7d

Const adErrNotReentrant = &He7e

Const adErrStillExecuting = &He7f

Const adErrOperationCancelled = &He80

Const adErrStillConnecting = &He81

Const adErrInvalidTransaction = &He82

Const adErrUnsafeOperation = &He84
Const adwrnSecurityDialog = &He85
Const adwrnSecurityDialogHeader = &He86
Const adErrIntegrityViolation = &He87
Const adErrPermissionDenied = &He88
Const adErrDataOverflow = &He89
Const adErrSchemaViolation = &He8a
Const adErrSignMismatch = &He8b
Const adErrCantConvertvalue = &He8c
Const adErrCantCreate = &He8d
Const adErrColumnNotOnThisRow = &He8e
Const adErrURLIntegrViolSetColumns = &He8f
Const adErrURLDoesNotExist = &He8f
Const adErrTreePermissionDenied = &He90
Const adErrInvalidURL = &He91
Const adErrResourceLocked = &He92
Const adErrResourceExists = &He93
Const adErrCannotComplete = &He94
Const adErrVolumeNotFound = &He95
Const adErrOutOfSpace = &He96
Const adErrResourceOutOfScope = &He97
Const adErrUnavailable = &He98
Const adErrURLNamedRowDoesNotExist = &He99
Const adErrDelResOutOfScope = &He9a
Const adErrPropInvalidColumn = &He9b
Const adErrPropInvalidOption = &He9c
Const adErrPropInvalidValue = &He9d
Const adErrPropConflicting = &He9e
Const adErrPropNotAllSettable = &He9f
Const adErrPropNotSet = &Hea0
Const adErrPropNotSettable = &Hea1
Const adErrPropNotSupported = &Hea2
Const adErrCatalogNotSet = &Hea3
Const adErrCantChangeConnection = &Hea4

Const adErrFieldsUpdateFailed = &Hea5
Const adErrDenyNotSupported = &Hea6
Const adErrDenyTypeNotSupported = &Hea7
Const adErrProviderNotSpecified = &Hea9

'---- ParameterAttributesEnum Values ----

Const adParamSigned = &H0010
Const adParamNullable = &H0040
Const adParamLong = &H0080

'---- ParameterDirectionEnum Values ----

Const adParamUnknown = &H0000
Const adParamInput = &H0001
Const adParamOutput = &H0002
Const adParamInputOutput = &H0003
Const adParamReturnValue = &H0004

'---- CommandTypeEnum Values ----

Const adCmdUnknown = &H0008
Const adCmdText = &H0001
Const adCmdTable = &H0002
Const adCmdStoredProc = &H0004
Const adCmdFile = &H0100
Const adCmdTableDirect = &H0200

'---- EventStatusEnum Values ----

Const adStatusOK = &H0000001
Const adStatusErrorsOccurred = &H0000002
Const adStatusCantDeny = &H0000003
Const adStatusCancel = &H0000004
Const adStatusUnwantedEvent = &H0000005

'---- EventReasonEnum Values ----

Const adRsnAddNew = 1

Const adRsnDelete = 2
Const adRsnUpdate = 3
Const adRsnUndoUpdate = 4
Const adRsnUndoAddNew = 5
Const adRsnUndoDelete = 6
Const adRsnRequery = 7
Const adRsnResynch = 8
Const adRsnClose = 9
Const adRsnMove = 10
Const adRsnFirstChange = 11
Const adRsnMoveFirst = 12
Const adRsnMoveNext = 13
Const adRsnMovePrevious = 14
Const adRsnMoveLast = 15

'---- SchemaEnum Values ----

Const adSchemaProviderSpecific = -1
Const adSchemaAsserts = 0
Const adSchemaCatalogs = 1
Const adSchemaCharacterSets = 2
Const adSchemaCollations = 3
Const adSchemaColumns = 4
Const adSchemaCheckConstraints = 5
Const adSchemaConstraintColumnUsage = 6
Const adSchemaConstraintTableUsage = 7
Const adSchemaKeyColumnUsage = 8
Const adSchemaReferentialConstraints = 9
Const adSchemaTableConstraints = 10
Const adSchemaColumnsDomainUsage = 11
Const adSchemaIndexes = 12
Const adSchemaColumnPrivileges = 13
Const adSchemaTablePrivileges = 14
Const adSchemaUsagePrivileges = 15
Const adSchemaProcedures = 16

Const adSchemaSchemata = 17
Const adSchemaSQLLanguages = 18
Const adSchemaStatistics = 19
Const adSchemaTables = 20
Const adSchemaTranslations = 21
Const adSchemaProviderTypes = 22
Const adSchemaViews = 23
Const adSchemaViewColumnUsage = 24
Const adSchemaViewTableUsage = 25
Const adSchemaProcedureParameters = 26
Const adSchemaForeignKeys = 27
Const adSchemaPrimaryKeys = 28
Const adSchemaProcedureColumns = 29
Const adSchemaDBInfoKeywords = 30
Const adSchemaDBInfoLiterals = 31
Const adSchemaCubes = 32
Const adSchemaDimensions = 33
Const adSchemaHierarchies = 34
Const adSchemaLevels = 35
Const adSchemaMeasures = 36
Const adSchemaProperties = 37
Const adSchemaMembers = 38
Const adSchemaTrustees = 39
Const adSchemaFunctions = 40
Const adSchemaActions = 41
Const adSchemaCommands = 42
Const adSchemaSets = 43

'---- FieldStatusEnum Values ----'

Const adFieldOK = 0
Const adFieldCantConvertValue = 2
Const adFieldIsNull = 3
Const adFieldTruncated = 4
Const adFieldSignMismatch = 5

Const adFieldDataOverflow = 6
 Const adFieldCantCreate = 7
 Const adFieldUnavailable = 8
 Const adFieldPermissionDenied = 9
 Const adFieldIntegrityViolation = 10
 Const adFieldSchemaViolation = 11
 Const adFieldBadStatus = 12
 Const adFieldDefault = 13
 Const adFieldIgnore = 15
 Const adFieldDoesNotExist = 16
 Const adFieldInvalidURL = 17
 Const adFieldResourceLocked = 18
 Const adFieldResourceExists = 19
 Const adFieldCannotComplete = 20
 Const adFieldVolumeNotFound = 21
 Const adFieldOutOfSpace = 22
 Const adFieldCannotDeleteSource = 23
 Const adFieldReadOnly = 24
 Const adFieldResourceOutOfScope = 25
 Const adFieldAlreadyExists = 26
 Const adFieldPendingInsert = &H10000
 Const adFieldPendingDelete = &H20000
 Const adFieldPendingChange = &H40000
 Const adFieldPendingUnknown = &H80000
 Const adFieldPendingUnknownDelete = &H100000

'---- SeekEnum Values ----'

Const adSeekFirstEQ = &H1
 Const adSeekLastEQ = &H2
 Const adSeekAfterEQ = &H4
 Const adSeekAfter = &H8
 Const adSeekBeforeEQ = &H10
 Const adSeekBefore = &H20

'---- ADCPROP_UPDATECRITERIA_ENUM Values ----

Const adCriteriaKey = 0

Const adCriteriaAllCols = 1

Const adCriteriaUpdCols = 2

Const adCriteriaTimeStamp = 3

'---- ADCPROP_ASYNCTHREADPRIORITY_ENUM Values ----

Const adPriorityLowest = 1

Const adPriorityBelowNormal = 2

Const adPriorityNormal = 3

Const adPriorityAboveNormal = 4

Const adPriorityHighest = 5

'---- ADCPROP_AUTORECALC_ENUM Values ----

Const adRecalcUpFront = 0

Const adRecalcAlways = 1

'---- ADCPROP_UPDATERESYNC_ENUM Values ----

'---- ADCPROP_UPDATERESYNC_ENUM Values ----

'---- MoveRecordOptionsEnum Values ----

Const adMoveUnspecified = -1

Const adMoveOverWrite = 1

Const adMoveDontUpdateLinks = 2

Const adMoveAllowEmulation = 4

'---- CopyRecordOptionsEnum Values ----

Const adCopyUnspecified = -1

Const adCopyOverWrite = 1

Const adCopyAllowEmulation = 4

Const adCopyNonRecursive = 2

'---- StreamTypeEnum Values ----

Const adTypeBinary = 1

Const adTypeText = 2

'---- LineSeparatorEnum Values ----

Const adLF = 10

Const adCR = 13

Const adCRLF = -1

'---- StreamOpenOptionsEnum Values ----

Const adOpenStreamUnspecified = -1

Const adOpenStreamAsync = 1

Const adOpenStreamFromRecord = 4

'---- StreamWriteEnum Values ----

Const adWriteChar = 0

Const adWriteLine = 1

'---- SaveOptionsEnum Values ----

Const adSaveCreateNotExist = 1

Const adSaveCreateOverWrite = 2

'---- FieldEnum Values ----

Const adDefaultStream = -1

Const adRecordURL = -2

'---- StreamReadEnum Values ----

Const adReadAll = -1

Const adReadLine = -2

'---- RecordTypeEnum Values ----

Const adSimpleRecord = 0

Const adCollectionRecord = 1

Const adStructDoc = 2


%>

ADMINISTRATOR PANEL



Visual Basic Program

FORM1

Order ID And Amount

ORDER ID Search: 

| | ORDER ID | ID | Amount |
|---|----------|------|--------|
| ▶ | 2 | 1003 | 10 |
| | 2 | 505 | 10 |
| | 2 | 305 | 2 |
| * | | | |

Code Form1

Option Explicit

Private WithEvents Cn As ADODB.Connection

Private WithEvents Rs As ADODB.Recordset

Private Sub cmdClose_Click()

On Error Resume Next

Form4.Show

Unload Me

End Sub

Private Sub cmdRefresh_Click()

Call RefreshGrid

txtSearch = ""

End Sub

Private Sub CmdSearch_Click()

```
Dim Wherestring As String, Sstring As String
```

```
'On Error Resume Next
```

```
    Sstring = Trim(txtSearch)
```

```
    Wherestring = " WHERE siparis_id LIKE " & Trim(Sstring) & "%' "
```

```
    Call RefreshGrid(Wherestring)
```

```
End Sub
```

```
Private Sub Command1_Click()
```

```
Form2.Show vbModal
```

```
End Sub
```

```
Private Sub Form_KeyPress(KeyAscii As Integer)
```

```
    Select Case KeyAscii
```

```
        Case vbKeyEscape
```

```
            Unload Me
```

```
    End Select
```

```
End Sub
```

```
Private Sub Form_Load()
```

```
    Set Cn = New ADODB.Connection
```

```
    Cn.CursorLocation = adUseClient
```

```
    Cn.Open "Provider=Microsoft.Jet.OLEDB.4.0;Persist Security Info=False;Data  
Source= " & App.Path & "\computer.mdb"
```

```
    Set Rs = New ADODB.Recordset
```

```
    Rs.Open "SELECT * From siparisler ORDER BY siparis_id", Cn, adOpenStatic,  
adLockOptimistic
```

```
    If Rs.EOF = True And Rs.BOF = True Then
```

```
        Exit Sub
```

```
    End If
```

```
        Call RefreshGrid
```

```
End Sub
```

```
Private Sub RefreshGrid(Optional ByVal WhereStr As String)
```

```
    Dim strSQL As String
```

```
    Dim Rs As New ADODB.Recordset
```

On Error Resume Next

```
strSQL = "SELECT siparis_id,comp_id,adet "
```

```
strSQL = strSQL + " FROM siparis_kalemleri"
```

```
If WhereStr <> "" Then
```

```
    strSQL = strSQL + WhereStr
```

```
End If
```

```
strSQL = strSQL + " ORDER BY siparis_id ASC"
```

```
Rs.Open strSQL, Cn, adOpenKeyset, adLockOptimistic
```

```
Set Adcuser.Recordset = Rs
```

```
Adcuser.Refresh
```

```
End Sub
```

```
Private Sub txtSearchValue_DblClick()
```

```
    txtSearch = ""
```

```
End Sub
```

```
Private Sub txtSearchValue_KeyPress(KeyAscii As Integer)
```

```
    CmdSearch_Click
```

```
End Sub
```

FORM2

| ID | Name | Surname | Address | Address | Country | Zip Code | tel | nakliye | toplam | Hk Tip |
|----|------|---------|---------|---------|---------|-----------|-------------|---------|--------|-------------|
| 2 | Can | Arsen | Lefkoga | | Lefkoga | mersin 10 | 03922233964 | | | Master Kart |

Code Form2

```
Option Explicit
Private WithEvents Cn As ADODB.Connection
Private WithEvents Rs As ADODB.Recordset
Private Sub cmdClose_Click()
On Error Resume Next
    Form4.Show
    Unload Me
End Sub
Private Sub CmdDelete_Click()
Dim SqlString As String
Dim Rs As New ADODB.Recordset
    If MsgBox("Confirm deletion of this record. Delete record now?", vbQuestion +
vbYesNo + vbDefaultButton2, "Confirm Delete") = vbYes Then
        SqlString = "Delete from siparisler where ad =" & adcReports.Recordset("ad")
        & ""
        Cn.Execute SqlString
        Call RefreshGrid
    End If
End Sub
Private Sub cmdRefresh_Click()
    Call RefreshGrid
    txtSearch = ""
End Sub
Private Sub CmdSearch_Click()
Dim Wherestring As String, Sstring As String
'On Error Resume Next
    Sstring = Trim(txtSearch)
    Wherestring = " WHERE siparis_id LIKE " & Trim(Sstring) & "%' "
    Call RefreshGrid(Wherestring)
End Sub

Private Sub Form_KeyPress(KeyAscii As Integer)
Select Case KeyAscii
```

```

Case vbKeyEscape
    Unload Me
End Select
End Sub

Private Sub Form_Load()
    Set Cn = New ADODB.Connection
    Cn.CursorLocation = adUseClient
    Cn.Open "Provider=Microsoft.Jet.OLEDB.4.0;Persist Security Info=False;Data
Source= " & App.Path & "\computer.mdb"
    Set Rs = New ADODB.Recordset
    Rs.Open "SELECT * From siparisler ORDER BY siparis_id", Cn, adOpenStatic,
adLockOptimistic
    If Rs.EOF = True And Rs.BOF = True Then

Exit Sub
End If
    Call RefreshGrid
End Sub

Private Sub RefreshGrid(Optional ByVal WhereStr As String)
    Dim strSQL As String
    Dim Rs As New ADODB.Recordset
    On Error Resume Next
    strSQL = "SELECT siparis_id, ad, soy_ad, adres1, adres2, sehir, posta_kodu, tel,
nakliye, toplam, kk_tip, kk_num, kk_ustundeki_isim, durum "
    strSQL = strSQL + " FROM siparisler"
    If WhereStr <> "" Then
        strSQL = strSQL + WhereStr
    End If
    strSQL = strSQL + " ORDER BY siparis_id ASC"
    Rs.Open strSQL, Cn, adOpenKeyset, adLockOptimistic
    Set adcReports.Recordset = Rs
    adcReports.Refresh
End Sub

Private Sub txtSearchValue_DblClick()

```

```
txtSearch = ""
```

```
End Sub
```

```
Private Sub txtSearchValue_KeyPress(KeyAscii As Integer)
```

```
    CmdSearch_Click
```

```
End Sub
```

FORM3

| ID | Item Name | Categories | Price | Page Name |
|-----|------------------------|------------|-------|--------------|
| 101 | Asus TUSL-M 5370 | Main Board | 10 | asus1.asp |
| 102 | Asus CUSL2-C 5370 | Main Board | 11 | asus1.asp |
| 103 | Gigabyte 71XE4 Sock | Main Board | 12 | asus1.asp |
| 104 | Gigabyte 72XE Sock | Main Board | 13 | asus1.asp |
| 105 | Gigabyte 7ZDR-C Soc | Main Board | 14 | asus1.asp |
| 106 | Asus A7V133 Socket | Main Board | 15 | asus1.asp |
| 201 | 32Mb Daytona G2 MX | Video Card | 16 | ekran.asp |
| 202 | 64Mb Daytona G2 MX | Video Card | 17 | ekran.asp |
| 203 | 64Mb Eagle Geforce 2 | Video Card | 18 | ekran.asp |
| 204 | 64Mb Asus V7100 MX | Video Card | 19 | ekran.asp |
| 205 | 64Mb Powercolor Gef | Video Card | 20 | ekran.asp |
| 301 | AMD Duron 1000 GEF | AMD Cpu | 21 | cpu.asp |
| 302 | AMD Athlon XP 1600+ | AMD Cpu | 22 | cpu.asp |
| 303 | AMD Athlon XP 1700+ | AMD Cpu | 23 | cpu.asp |
| 304 | Intel Pentium 4 1.5 (S | Intel Cpu | 24 | cpu1.asp |
| 305 | Intel Pentium 4 1.6 (S | Intel Cpu | 25 | cpu1.asp |
| 306 | Intel Pentium 4 1.7 (S | Intel Cpu | 26 | cpu1.asp |
| 401 | 20Gb Seagate/W.D//E | Hard Disk | 27 | harddisk.asp |
| 402 | 40Gb Seagate/W.D//E | Hard Disk | 28 | harddisk.asp |
| 403 | 60Gb Seagate/W.D//E | Hard Disk | 29 | harddisk.asp |
| 404 | 80Gb Seagate/W.D//E | Hard Disk | 30 | harddisk.asp |
| 405 | 100Gb Seagate/W.D//E | Hard Disk | 31 | harddisk.asp |

| Computer ID | Category ID |
|-------------|-------------|
| 101 | 1 |
| 102 | 1 |
| 103 | 1 |
| 104 | 1 |
| 105 | 1 |
| 106 | 1 |
| 201 | 2 |
| 202 | 2 |
| 203 | 2 |
| 204 | 2 |
| 205 | 2 |
| 301 | 3 |
| 302 | 3 |
| 303 | 3 |
| 304 | 3 |
| 305 | 3 |
| 306 | 3 |
| 401 | 4 |
| 402 | 4 |
| 403 | 4 |
| 404 | 4 |
| 405 | 4 |

Code Form3

```
Private Sub dbgideas_Click(Index As Integer)
```

```
End Sub
```

```
Private Sub Form_KeyPress(KeyAscii As Integer)
```

```
    Select Case KeyAscii
```

```
        Case vbKeyEscape
```

```
            Unload Me
```

```
        End Select
```

```
    End Sub
```

```
Private Sub Form_Load()
```

```
    Set Cn = New ADODB.Connection
```

```
    Cn.CursorLocation = adUseClient
```



```
Cn.Open "Provider=Microsoft.Jet.OLEDB.4.0;Persist Security Info=False;Data  
Source= " & App.Path & "\computer.mdb"
```

```
Set Rs = New ADODB.Recordset
```

```
Rs.Open "SELECT * From complar ORDER BY comp_id", Cn, adOpenStatic,  
adLockOptimistic
```

```
If Rs.EOF = True And Rs.BOF = True Then
```

```
Exit Sub
```

```
End If
```

```
Call RefreshGrid
```

```
End Sub
```

```
Private Sub RefreshGrid(Optional ByVal WhereStr As String)
```

```
Dim strSQL As String
```

```
Dim Rs As New ADODB.Recordset
```

```
On Error Resume Next
```

```
strSQL = "SELECT comp_id, comp_ismi, kategori, fiyat_TL, sayfa_ismi"
```

```
strSQL = strSQL + " FROM complar"
```

```
If WhereStr <> "" Then
```

```
strSQL = strSQL + WhereStr
```

```
End If
```

```
strSQL = strSQL + " ORDER BY comp_id ASC"
```

```
Rs.Open strSQL, Cn, adOpenKeyset, adLockOptimistic
```

```
Set adcideas.Recordset = Rs
```

```
adcideas.Refresh
```

```
End Sub
```

```
Private Sub txtSearchValue_DblClick()
```

```
txtSearch = ""
```

```
End Sub
```

```
Private Sub txtSearchValue_KeyPress(KeyAscii As Integer)
```

```
CmdSearch_Click
```

```
End Sub
```


FORM4



Code Form 4

```
Private Sub Command1_Click()
```

```
Form1.Show vbModal
```

```
End Sub
```

```
Private Sub Command2_Click()
```

```
Form2.Show vbModal
```

```
End Sub
```

```
Private Sub Command3_Click()
```

```
Form3.Show vbModal
```

```
End Sub
```

```
Private Sub Command4_Click()
```

```
End
```

```
End Sub
```

```
Private Sub Picture1_Click()
```

```
End Sub
```

CONCLUSION

I have used ASP technology in order to accomplish this project. The most important aspect of ASP is database management.. All the information and transactions of the member customers have been saved to a database for later processes and references. Also this project guided me to improved my scripting and HTML knowledge.

While designing web interfaces with third party programs such as FrontPage and Dreamweaver that necessarily do not need programming background, but integrating ASP to the HTML codes requires a scripting and background knowledge that leaded me to improve my scripting knowledge in web programming.

The most important reason that ASP appealed me is that it is a key to the future while Internet is spreading in every segment of life and millions of people are getting online every day.

In this project, I have established the the fundamentals of ASP and I will be happy to use it in my professional life.

REFERENCES

- [1] Zafer Demirkol, ASP ile Web Programcılığı ve elektronik Ticaret , Pusula Yayıncılık ev İletişim Ltd.
- [2] Faruk Çubukcu, ASP 3.0 ile Veritabanı Yönetimi, Alfa Yayınları
- [3] Stephan Walther, ASP ile E-Ticaret Programcılığı, Sistem Yayıncılık
- [4] Dr. Hakkı Öcal, ASP