

NEAR EAST UNIVERSITY

Faculty of Engineering

Department of Computer Engineering

E-COMMERCE

**Graduation Project
Com-400**

Student : Saygın KURT

Supervisor : Mr. Ümit İLHAN

Nicosia-2002

ACKNOWLEDGMENTS

I am very great full to those who have given me the courage to finish the project that my teacher which I have looked upon gave me to complete.

My wonderful teacher Mr Umit İLHAN I can not explain how much this project has taught me and how much useful it will be in my life. I thank you very much for assigning me for the project.

I can not thank enough my family for the things they had to put up with until they brought me to the age that I am. Especially during the time of time of my life in the faculty.

To all my friends I don't know how much and how to say thank you for making me what I am.

Meanwhile I am a very forgetful person I would like to send a special thanks to everyone which has helped me with the project and in life.

ABSTRACT

I have conducted this project using ASP (Active Server Pages) technology. The web site introduced in this project is a e-commerce web site . On those pages, online shopping customers can have membership to the online shopping .

Also, a program has been developped with Microsoft Front Page in order to view all the user transactions and comments where this program will run on the server side of the system.

TABLE OF CONTENTS

	<u>Page</u>
ACKNOWLEDGMENTS.....	i
ABSTRACT.....	ii
What is E-Commerce?.....	1
What is Active Server Pages?.....	2
The Active Server Pages Model.....	2
HTML (Hypertext Markup Language).....	3
IIS (Internet Information Server).....	4
VBScript.....	5
JavaScript.....	5
DATABASES.....	7
Table1 : comp_kategori.....	7
Table2 : complar.....	7
Table3 : kategori.....	7
Table4 : siparis_kalemleri.....	7
Table5 : siparisler.....	8
Table6 : uyeler.....	8
 //ROOT.....	 9
//root/default.asp.....	9
//root/ comp_kategorileri.asp.....	12
//root/ comp_kategorileri_vitrini.asp.....	15
//root/comp_vitrin.asp.....	17
//root/kayit.asp.....	19
//root/ kayit_islem.asp.....	22
//root/sayfatop.htm.....	24
//root/ uye_giris.asp.....	29
//root/uye_giris_islem.asp.....	33
//root/benim_sayfam.....	37
//root/benim_sayfam/sayfam.asp.....	37
//root/ benim_sayfam/sayfami_duzenle.asp.....	39
//root/comp_sayfaları.....	42
//root/comp_sayfaları/asus1.asp?comp_id=.....	42

//root/comp_sayfalari/cdrom.asp?comp_id=.....	43
//root/comp_sayfalari/cpu.asp?comp_id=.....	43
//root/comp_sayfalari/ekran.asp?comp_id=.....	44
//root/comp_sayfalari/harddisk.asp?comp_id=.....	45
//root/comp_sayfalari/keyboard.asp?comp_id=.....	45
//root /comp_sayfalari/modem.asp?comp_id=.....	46
//root/comp_sayfalari/monitor.asp?comp_id=.....	47
//root /comp_sayfalari/printer.asp?comp_id=.....	47
//root/comp_sayfalari/scanner.asp?comp_id=.....	48
//root/comp_sayfalari/sound.asp?comp_id=.....	49
//root /comp_sayfalari/back.inc.....	49
//root/satis.....	49
//root/satis/sepet.asp.....	49
//root/satis/sepet.inc.....	50
//root/satis/sepet_ekle.asp.....	50
//root/satis/sepete_ekle_islem.asp.....	52
//root/satis/sepete_gozat.asp.....	55
//root/satis/sepete_gozat_islem.asp.....	59
//root/satis/siparis_ekle.asp.....	67
ADO.INC.....	70
CONCLUSION.....	86
REFERENCES.....	86

What is E-Commerce?

E-commerce is the buying and selling of goods and services across the Internet. An e-commerce site can be as simple as a catalog page with a phone number, or it can range all the way to a real-time credit card processing site where customers can purchase downloadable goods and receive them on the spot. Electronic commerce merchants can range from the small business with a few items for sale all the way to a large on-line retailer such as Amazon.com.

About Online Payment Processing

When a customer purchases an item with a credit card, a two step process begins.

1. The merchant or the website requests an authorization from the customer's credit card account to ensure that the card is valid and the customer has enough available balance for the purchase. The customer's bank sends an authorization number back to the merchant or the website and the order is "captured".
2. The merchandise is sent, and the merchant informs the bank where they have a merchant account. The bank deposits funds to the merchant's account while the customer's account is debited for the amount of the purchase. At that time, the customers' bank takes out the required fees and the transaction is complete.

Credit cards are an important part of enabling Internet commerce. The easiest process to integrate into an existing business is an off-line authorization and settlement process. For more advanced web merchants who are processing more than 100 transactions per month, real time credit card authorization becomes economical. With a link to a Processing Service Provider such as Cybercash or AuthorizeNet, the website generates an authorization request when the customer places the order.

If the merchant is selling hard goods which have to be shipped to the customer, then order is saved securely for later settlement. Once the goods are shipped, the merchant can settle the order, and the transaction is completed. If the merchant is selling downloadable media, software, or site memberships for example, then the order can be authorized and settled in real time, without any intervention by the merchant.

What is Active Server Pages?

Microsoft® Active Server Pages (ASP) is a *server-side scripting* environment that you can use to create and run dynamic, interactive, high-performance Web server applications. When your scripts run on the server rather than on the client, your Web server does all the work involved in generating the Hypertext Markup Language (HTML) pages that you send to browsers. You need not worry whether a browser can process your pages: your Web server does all the processing for it.


You need only a working knowledge of HTML to begin using ASP. Take a look at A Brief History of Hypertext to better understand ASP's place in the evolution of the Web, as well as the powerful set of features ASP provides.

Active Server Pages is a feature of and can be used with the following Web servers:

- Microsoft Internet Information Server version 3.0 on Windows NT Server
- Microsoft Peer Web Services Version 3.0 on Windows NT Workstation
- Microsoft Personal Web Server on Windows 95

The Active Server Pages Model

An ASP script begins to run when a browser requests an .asp file from your Web server. Your Web server then calls ASP, which reads through the requested file from top to bottom, executes any commands, and sends an HTML page to the browser.

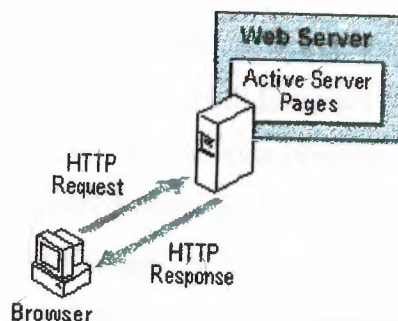

An Active Server Page (ASP) is an HTML page that includes one or more scripts (small embedded programs) that are processed on a Microsoft Web server before the page is sent to the user. An ASP is somewhat similar to a server-side include or a common gateway interface (CGI) application in that all involve programs that run on the server, usually tailoring a page for the user. Typically, the script in the Web page at the server uses input received as the result of the user's request for the page to access data from a database and then builds or customizes the page on the fly before sending it to the requestor.

ASP is a feature of the Microsoft Internet Information Server (IIS), but, since the server-side script is just building a regular HTML page, it can be delivered to almost any browser. You can create an ASP file by including a script written in VBScript or JScript in an HTML file or by using ActiveX Data Objects (ADO) program statements in the HTML file. You name the HTML file with the ".asp" file suffix. Microsoft recommends the use of the server-side ASP rather than a client-side script, where there is actually a choice, because the server-side script will result in an easily displayable HTML page. Client-side scripts (for example, with JavaScript) may not work as intended on older browsers.

HTML (Hypertext Markup Language)

HTML (Hypertext Markup Language) is the set of "markup" symbols or codes inserted in a file intended for display on a World Wide Web browser. The markup tells the Web browser how to display a Web page's words and images for the user. The individual markup codes are referred to as elements

HTML is a standard recommended by the World Wide Web Consortium (W3C) and adhered to by the major browsers, Microsoft's Internet Explorer and Netscape's Navigator, which also provide some additional non-standard codes. The current version of HTML is HTML 4. However, both Internet Explorer and Netscape implement some features differently and provide non-standard extensions. Web developers using the more advanced features of HTML 4 may have to design pages for both browsers and send out the appropriate version to a user. Significant features in HTML 4 are sometimes described in general as dynamic HTML. What is sometimes referred to as HTML 5 is an extensible form of HTML called XHTML.

IIS (Internet Information Server)

IIS (Internet Information Server) is a group of Internet servers (Web or HTTP, FTP, and Gopher) and other capabilities for Microsoft's Windows NT and Windows 2000 Server operating systems. IIS is Microsoft's bid to dominate the Internet server market that is also addressed by Netscape, Sun Microsystems, O'Reilly, and others. With IIS, Microsoft includes a set of programs for building and administering Web sites, a search engine, and support for writing Web-based applications that access databases. Microsoft points out that IIS is tightly integrated with the Windows NT and 2000 Servers in a number of ways, resulting in faster Web page serving.

A typical company that buys IIS can create pages for Web sites using Microsoft's Front Page product (with its WYSIWYG user interface). Web developers can use Microsoft's Active Server Page (ASP) technology, which means that applications - including ActiveX controls - can be imbedded in Web pages that modify the content sent back to users. Developers can also write programs that filter requests and get the correct Web pages for different users by using Microsoft's ISAPI interface. ASPs and ISAPI programs run more efficiently than Common Gateway Interface (CGI) and server-side include (SSI) programs, two current technologies.

Microsoft includes special capabilities for server administrators designed to appeal to Internet service providers (ISPs). It includes a single window (or "console") from which all services and users can be administered. It's designed to be easy to add components as "snap-ins" that you didn't initially install. The administrative windows can be customized for access by individual customers.

IIS includes security features and promises that it is easy to install. It works closely with the Microsoft Transaction Server to access databases and provide control at the transaction level. It also works with Microsoft's Netshow in the delivery of streaming audio and video, delayed or live.

VBScript

VBScript is an interpreted script language from Microsoft that is a subset of its Visual Basic programming language. VBScript can be compared to other script languages designed for the Web, including:

- Netscape's JavaScript
- Sun Microsystems's Tcl
- The UNIX-derived Perl
- IBM's REXX

In general, script languages are easier and faster to code in than the more structured, compiled languages such as C and C++ and are ideal for smaller programs of limited capability or that can reuse and tie together existing compiled programs.

VBScript is Microsoft's answer to Netscape's popular JavaScript. Both are designed to work with an interpreter that comes with a Web browser - that is, at the user or client end of the Web client/server session. VBScript is designed for use with Microsoft's Internet Explorer browser together with other programming that can be run at the client, including ActiveX controls, automation servers, and Java applets. Although Microsoft does support Netscape's JavaScript (it converts it into its own JScript), Netscape does not support VBScript. For this reason, VBScript is best used for intranet Web sites that use the Internet Explorer browser only.

JavaScript

JavaScript is an interpreted programming or script language from Netscape. It is somewhat similar in capability to Microsoft's Visual Basic, Sun's Tcl, the UNIX-derived Perl, and IBM's REXX. In general, script languages are easier and faster to code in than the more structured and compiled languages such as C and C++. Script languages generally take longer to process than compiled languages, but are very useful for shorter programs.

JavaScript is used in Web site development to do such things as:

- Automatically change a formatted date on a Web page

- Cause a linked-to page to appear in a popup window (see our "Make a WordPop!" page)
- Cause text or a graphic image to change during a mouse rollover

JavaScript uses some of the same ideas found in Java, the compiled object-oriented language derived from C++. JavaScript code can be imbedded in HTML pages and interpreted by the Web browser (or client). JavaScript can also be run at the server as in Microsoft's Active Server Pages (ASPs) before the page is sent to the requestor.

DATABASES

Computer.mdb

Table1 : comp_kategori

Field Name	Type	Size
comp_id	Number	Long Integer
kategori_id	Number	Long Integer

Table2 : complar

Field Name	Type	Size
comp_id	Number	Long Integer
comp_ismi	Text	50
kategori	Text	50
fiyat_TL	Number	Long Integer
sayfa_ismi	Text	50

Table3 : kategori

Field Name	Type	Size
kategori_id	Automatic Number	Long Integer
kategori_ismi	Text	50

Table4 : siparis_kalemleri

Field Name	Type	Size
siparis_id	Number	Long Integer
comp_id	Number	Long Integer
adet	Number	Long Integer

Table5 : siparisler

Field Name	Type	Size
siparis_id	Number	Long Integer
ad	Text	50
soy_ad	Text	50
adres1	Text	50
adres2	Text	50
sehir	Text	50
posta_kodu	Text	50
tel	Text	50
nakliye	Text	50
toplam	Text	50
kk_tip	Text	50
kk_num	Text	50
kk_ustundeki_isim	Text	50
durum	Text	50

Table6 : uyeler

Field Name	Type	Size
ad	Text	50
soyad	Text	50
kullanici_ismi	Text	50
sifre	Text	50
email	Text	50

//ROOT

//root/default.asp



default.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">

<title>  ***** SAYGIN KURT COMPUTER&nbsp; WEB PAGE Online Shop
*****</title>
</head>
<% @ LANGUAGE=VBScript CODEPAGE=1254 %>
<!--#include file="sayfatop.htm"-->
<body bgcolor="#FFFFFF" leftmargin="0" topmargin="0" link="#000080"
vlink="#000080" alink="#000080" text="#000080">
&nbsp;
<p><b><i>
<span style="background-color: #FFFFFF">
```



```

<font color="#FF6600">
<marquee>*** WELCOME TO SAYGIN KURT WEB PAGE ***</marquee>
</font>
</span>
</i></b></p>
<p>&nbsp;</p>
<p>
<center>
<b><i><span style="background-color: #FFFFFF"><font color="#FF6600">*****
KURT&nbsp;<span style="background-color: #FFFFFF"><font color="#FF6600">*****
SHOP *****</font></span></i></b></center></p>
<p>&nbsp;</p>
<table border="0" width="100%">
<tr>
<td width="100%">
<p align="center"></td>
</tr>
</table>
<p align="center"><b><i><u><font color="#FF6600">contact</font>
</u></i></b></p>
<table border="0" width="100%">
<tr>
<td width="100%">
<p align="center"><a href="mailto:saygin_kurt@hotmail.com"></a></td>
</tr>
</table>
<table border="0" width="101%">
<tr>
<td width="99%">
<p align="center"><!--webbot bot="HTMLMarkup" startspan --><script
language="JavaScript"><!--

```

```

var now = new Date(); var yr = now.getYear(); var mName = now.getMonth() + 1;
var dName = now.getDay() + 1;
var yr_str = " 19"; // yıl 2000 iken, 19 sayısının çıkmamasını sağlayacak string
var dayNr = ((now.getDate()<10) ? "" : "")+ now.getDate(); if(dName==1) Day =
"Pazar"; if(dName==2) Day = "Pazartesi"; if(dName==3) Day = "Salı";
if(dName==4) Day = "Çarşamba"; if(dName==5) Day = "Perşembe"; if(dName==6)
Day = "Cuma"; if(dName==7) Day = "Cumartesi"; if(mName==1) Month="Ocak";
if(mName==2) Month="Şubat"; if(mName==3) Month="Mart";
if(mName==4) Month="Nisan"; if(mName==5) Month="Mayıs"; if(mName==6)
Month="Haziran"; if(mName==7) Month="Temmuz"; if(mName==8)
Month="Ağustos"; if(mName==9) Month="Eylül";
if(mName==10) Month="Ekim"; if(mName==11) Month="Kasım"; if(mName==12)
Month="Aralık";
if ( yr > 99 )
{
yr_str = " ";
if ( yr < 2000 ) yr += 1900;
}
var todaysDate = (" " + dayNr + " " + Month + yr_str + yr + ""
+ ", " + Day + ""); document.open(); document.write("<FONT face=arial
SIZE=2 color=black>" + todaysDate + "</FONT>");// --></script>
<Center>
<!-- host banner -->
<object classid="clsid:D27CDB6E-AE6D-11cf-96B8-444553540000"
codebase="http://download.macromedia.com/pub
/shockwave/cabs/flash/swflash.cab#version=5,0,0,0" width="88" height="31">
<param name=movie value="http://www.bilgi-net.com.tr/swf/host_banner.swf">
<param name=quality value=high>
<embed src="http://www.bilgi-net.com.tr/swf/host_banner.swf" quality=high
pluginspage="http://www.macromedia.com/shockwave/download/index.cgi?P1_Prod
_Version=
ShockwaveFlash" type="application/x-shockwave-flash" width="88" height="31">
</embed>
</object>

```

```

<!-- host son --><BR>
<a href="http://www.karpuz.com"></a>
</center><!--webbot bot="HTMLMarkup" endspan -->
</td>
<td width="2%"></td>
</tr>
</table>
<p>&nbsp;</p>
</body>
</html>

```

//root/ comp_kategorileri.asp

KURT COMPUTER

» [Home Page](#) » [Computer Parts](#) » [Becker](#) » [Monitors](#)

COMPUTER PARTS

Main Boards
Video Adapters
Cpu
Hard Drives
Monitors
CDRom Drivers
Sound Cards
Modems
Keyboards
Printers
Scanners

[All Computer Parts and Price](#)

comp_kategorileri.asp

```

<html>
<head>

```


[illegible]

```

</font>
</i></H3>
<TABLE border=1 bgcolor=#FFFFFF style="border-collapse: collapse"
bordercolor="#111111" cellpadding="2" bordercolorlight="#000080"
bordercolordark="#000080" >
<%while not kategoriSeti.EOF%>
<TR>
<TD align=left valign="top"><FONT face="Lucida Sans Unicode" size=+1><A
HREF="comp_kategori_vitrini.asp?kategori=<%Response.Write
kategoriSeti("kategori_id")%>">
<%Response.Write kategoriSeti("kategori_ismi")%></A></FONT>&nbsp;</TD>

</TR>
<%kategoriSeti.MoveNext
wend %>
</TABLE>
<%
kategoriSeti.Close
set kategoriSeti=nothing
computerDB.close
set computerDB=nothing
%></CENTER>
<p align="center"><b><a href="comp_vitrin.asp"><i><font color="#FF6600">All
Computer Parts and Price</font></i></a></b></p>
</BODY>
</HTML>

```

//root/ comp_kategorileri_vitrini.asp

KURT COMPUTER

[Home Page](#)

[Computer Parts](#)

[Register](#)

[Members](#)

Monitors

Code	Computer Part Name	Price
501	15" Acer	24\$
502	17" Acer V771 (.27)	25\$
503	17" Masubishi 1770G (.27)	23\$
504	19" Proview	28\$
505	19" Hitachi CM721 Flat (.21)	34\$
506	21" Mitsubishi 2107 (.26)	35\$

[BACK](#)

comp_kategorileri_vitrini.asp

```

<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title> ***** Computer Parts Page *****</title>
</head>
<!--#include virtual="sayfatop.htm"-->
<br><br><br><br>
<% @ LANGUAGE=VBScript CODEPAGE=1254 %>
<%kategori=Request.QueryString("kategori")
Set computerDB=Server.CreateObject("ADODB.Connection")
computerDB.open "computer" %>
<%Set compkategoriSeti=computerDB.Execute("select*from comp_kategori where
kategori_id=" & kategori)%>
<%Set kategoriAdSet=computerDB.Execute("select*from kategori where
kategori_id=" & kategori)%>
<CENTER>
<h2><%Response.write kategoriAdSet("kategori_ismi")%></h2>

```



```
<TABLE border=1 bgcolor=#FFFFFF width="664" bordercolorlight="#000080"
bordercolordark="#000080" style="border-collapse: collapse"
bordercolor="#111111" cellpadding="2">
```

```
<TR>
```

```
<TH width="52"><i><font color="#FF6600">Code</font></i></TH>
```

```
<TH width="318"><i><font color="#FF6600">Computer Part
Name</font></i></TH>
```

```
<TH width="113"><i><font color="#FF6600">Price</font></i></TH>
```

```
</TR>
```

```
<%
```

```
while not compkategoriSeti.EOF
```

```
Set complarSet=computerDB.Execute("select * from complar where
complar.comp_id =" &compkategoriSeti("comp_id"))
```

```
while not complarSet.EOF %>
```

```
<TR>
```

```
<TD align=center width="52"><%Response.Write
complarSet("comp_id")%>&nbsp;</TD>
```

```
<TD align=center width="318"><a href="comp_sayfalari/<%Response.Write
complarSet("sayfa_ismi")%>?comp_id=<%Response.Write
complarSet("comp_id")%>"><%Response.Write
complarSet("comp_ismi")%></a>&nbsp;</TD>
```

```
<TD align=center width="113"><%Response.Write complarSet("fiyat_TL")%><font
color="#FF6600">$</font></TD>
```

```
</TR>
```

```
<%complarSet.MoveNext
```

```
wend
```

```
compkategoriSeti.MoveNext
```

```
wend
```

```
%>
```

```
</TABLE>
```

```
<%
```

```
compkategoriSeti.close
```

```

set compkategoriSeti=nothing
kategoriAdSet.close
set kategoriAdSet=nothing
computerDB.close
set computerDB=nothing
%>
</CENTER>
<p align="center"><b><a href="comp_kategorileri.asp"><i><font
color="#FF6600">BACK</font></i></a></b></p>
</HTML>

```

//root/comp_vitrin.asp

```

<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>***** comp Kategorileri *****</title>
</head>
<% @ LANGUAGE=VBScript CODEPAGE=1254 %>
<!--#include virtual="sayfatop.htm"-->
<!--#include file="adovbs.inc"-->
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<br><br><br><br>
<%
Set computerDB=Server.CreateObject("ADODB.Connection")
computerDB.open "computer"
Set compSeti=Server.CreateObject("ADODB.RecordSet")
compSeti.Open "select*from complar order by comp_ismi", computerDB,
adOpenForwardOnly%>
<div align="center">
<center>
<TABLE border=1 width="631" style="border-collapse: collapse"
bordercolor="#111111" cellpadding="0" cellspacing="0" >

```

```

<TR>
<TH width="483">
<p align="center"><font color="#FF6600">Computer Part Name</font></TH>
<TH width="132"><font color="#FF6600">Price</font></TH>
</TR>
<%while not compSeti.EOF%>
<TR>
<TD width="483" align="center"><%Response.Write
compSeti("comp_ismi")%>&nbsp;</TD>
<TD width="132" align="center"><%Response.Write compSeti("fiyat_TL")%><font
color="#FF6600">$</font></TD>
</TR>
<%compseti.MoveNext
wend %>
</TABLE>
</center>
</div>
<p align="center"><b><a href="comp_kategorileri.asp"><font
color="#FF6600">Back to Computer Parts</font></a></b></p>
<%
compSeti.Close
set compSeti=nothing
computerDB.close
set computerDB=nothing
%>
</BODY></HTML>

```


//root/kayit.asp

WANT TO BE MEMBER FILL IN THE BLANKS

First Name : saygin

Surname : KURT

User Name : saykurt Max 12 character

Password : Max 12 character

Again Password : Max 12 character

E-mail : saygin_kurt@hotmail.com

SEND

kayit.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title> ***** Register *****</title>
<!--#include virtual="sayfatop.htm"-->
</head>
<% @ LANGUAGE=VBScript CODEPAGE=1254 %>
<FORM action = "kayit_islem.asp" method="post" onsubmit="return
FrontPage_Form1_Validator(this)" name="FrontPage_Form1" >
<BODY link="#000080" vlink="#000080" alink="#000080" text="#000080"
bgcolor="#FFFFFF" >
<hr>
<H4>&nbsp;   </H4>
<H4 align="center"><span style="font-weight: 400">
<i>
```

```

<font face="Lucida Sans Unicode" style="font-size: 13pt" color="#FF6600">WANT
TO BE MEMBER FILL IN THE BLANKS</font></i></span></H4>
<B>
<TABLE border=0 cellPadding=1 cellSpacing=1 style="HEIGHT: 206px; WIDTH:
858">
  <TR>
    <TD align="right" width="169">&nbsp;</TD>
    <TD align="right" width="441">
      <i>
        <font face="Lucida Sans Unicode" style="font-size: 11pt" color="#FF6600">First
Name&nbsp;</font></i></TD>
      <TD width="391"><INPUT maxLength=15 name=ad size=27></TD></TR>
    <TR>
      <TD align="right" width="169">&nbsp;</TD>
      <TD align="right" width="441">
        <i>
          <font face="Lucida Sans Unicode" style="font-size: 11pt"
color="#FF6600">Surname&nbsp;</font></i></TD>
        <TD width="391">
          <INPUT maxLength=20 name=soyad size=22
style="HEIGHT: 22px; WIDTH: 116px"></TD></TR>
    <TR>
      <TD align="right" width="169">&nbsp;</TD>
      <TD align="right" width="441">
        <i>
          <font face="Lucida Sans Unicode" style="font-size: 11pt" color="#FF6600">User
Name&nbsp;</font></i></TD>
        <TD width="391">
          <font face="Lucida Sans Unicode">
            <INPUT name=kullanici_ad size=22>&nbsp;&nbsp;<font color="#FF6600">
<i><font size="2">Max
12 character</font></i></font></font></TD></TR>
    <TR>
      <TD align="right" width="169">&nbsp;</TD>

```

```

<TD align="right" width="441">
<i>
<font face="Lucida Sans Unicode" style="font-size: 11pt"
color="#FF6600">Password&nbsp;: </font></i></TD>
<TD width="391">
<font face="Lucida Sans Unicode">
<INPUT type=password maxLength=12 name=sifre
size=22>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;<i><font color="#000000">&nbsp;&nbsp;&
</font><font size="2" color="#FF6600">Max 12
character</font></i></font></TD></TR>
<TR>
<TD align="right" width="169">&nbsp;</TD>
<TD align="right" width="441">
<
<font face="Lucida Sans Unicode" style="font-size: 11pt"
color="#FF6600">Again Password&nbsp;: </font></i></TD>
<TD width="391"><font face="Lucida Sans Unicode"><INPUT type=password
maxLength=12 name=sifre2 size=22>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;<i><font
color="#000000">&nbsp;&nbsp;&,</font><font color="#FF6600">
<font size="2">Max 12 character</font></font></i></font></TD></TR>
<TR>
<TD align="right" width="169">&nbsp;</TD>
<TD align="right" width="441">
<
<font face="Lucida Sans Unicode" style="font-size: 11pt" color="#FF6600">E-
mail&nbsp;: </font></i></TD>
<TD width="391">
<INPUT maxLength=25 name=email size=33
style="HEIGHT: 22px; WIDTH: 114px"></TD></TR>
<TR>
<TD width="169">&nbsp;</TD>
<TD width="441"></TD>
<TD width="391">

```



```

<INPUT type=submit value="*** SEND ***" style="color: #000080; font-family:
Lucida Sans Unicode"><p>&nbsp;</p>
<p>&nbsp;</TD></TR></TABLE>    </B>
<hr>
</FORM>
</BODY>
</HTML>

```

//root/ kayit_islem.asp

KURT COMPUTER

[Home Page](#)

[Computer Parts](#)

[Register](#)

[Members](#)

Thank you for your Registration

kayit_islem.asp

```

<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>    ***** Welcome Register *****</title>
<!--#include virtual="sayfatop.htm"-->
</head>
<body>
<br><br>
<% @ LANGUAGE=VBScript CODEPAGE=1254 %>

```

```

<%
ad=Request.Form("ad")
soyad=Request.Form("soyad")
kullanici_ismi=Request.Form("kullanici_ad")
sifre=Request.Form("sifre")
sifre2=Request.Form("sifre2")
email=Request.Form("email")
%>
<%
if ad="" then
hata = "Please fill in the Name"
TEKRAR
Response.End
End if
if soyad="" then
hata = "Please fill in the Surname"
TEKRAR
Response.End
End if
if kullanici_ismi="" then
hata = "Please fill in the User Name"
TEKRAR
Response.End
End if
if sifre="" then
hata = "Please fill in the Password"
TEKRAR
Response.End
End if
if sifre2="" then
hata = "Please fill in the Again Password"
TEKRAR
Response.End

```

```

End if
if email="" then
hata = "Please fill in the E-Mail"
TEKRAR
Response.End
End if
%>
<%
if sifre=sifre2 then
set veritabani=server.CreateObject("ADODB.Connection")
veritabani.Open "computer"
veritabani_kullanici_ad="select* from uyeler where
kullanici_ismi='"&kullanici_ismi&'"
set sorgu=veritabani.Execute (veritabani_kullanici_ad)
if sorgu.EOF then
SQL="insert into uyeler (ad,soyad,kullanici_ismi,sifre,email) values
('"&ad&',"&soyad&',"&kullanici_ismi&',"&sifre&',"&email&')"
veritabani.Execute(SQL)%>

```

//root/sayfatop.htm

KURT COMPUTER

[Home Page](#)

[Computer Parts](#)

[Register](#)

[Members](#)


```

<body bgcolor=#FFFFFF link="#000080" vlink="#000080" alink="#000080"
text="#000080">
<p align="right"></p>
<p></p>
<p></p>
<p></p>
<p></p>
<p></p>
<p align="right"></p>
<table border="0" cellpadding="0" cellspacing="0" style="border-collapse: collapse"
bordercolor="#000080" width="100%" id="AutoNumber2">
  <tr>
    <td width="33%" bordercolorlight="#000080"
bordercolordark="#000080">&nbsp;
</td>
</tr>
</table>
<SCRIPT>
<!-- Hide from old browsers
// All you have to do is put another text in the variable message.
// Don't forget to break all lines with a ^
// When you do not place a ^ at the end of all the message, the
// message will not repeat

message = "***** Welcome to SAYGINKURT
Computer *****^" +
"***** KURT Computer Online Shop *****^" +
"***** Welcome to SAYGIN KURT web page //
saygin_kurt@hotmail.com *****^" +
"***** www.sayginkurt.com *****^" +
"***** Please specify your evaluations and
recomendations about our page *****^" +
"^"

scrollSpeed = 10
lineDelay = 900

```



```

<td width="17%" align="center" bgcolor="#FFCC66">
  <table border="0" width="100%">
    <tr>
      <td width="15%"><font color="#FF9933"></font></td>
      <td width="85%">
        <p align="left"><font><strong style="font-weight: 400">
< i><a href=" ../comp_kategorileri.asp"><font face="Lucida Sans Unicode"
style="font-size: 11pt" color="#FFFFFF">Computer
Parts
</font>
</a>
</i></strong></font></td>
      </tr>
    </table>
  </td>

  <td width="17%" align="center" bgcolor="#FFCC66">
    <table border="0" width="100%">
      <tr>
        <td width="16%"><font color="#FF9933"></font></td>
        <td width="84%">
          <p align="left"><strong style="font-weight: 400">
<a href=" ../kayit.asp">
< i>
<font face="Lucida Sans Unicode" style="font-size: 11pt"
color="#FFFFFF">Register</font></i></a></strong></p>
          </td>
        </tr>
      </table>
    </td>

    <td width="17%" align="center" bgcolor="#FFCC66">
      <table border="0" width="100%">
        <tr>

```

```

<td width="16%"><font color="#FF9933"></font></td>
<td width="84%">
  <p align="left"><strong style="font-weight: 400">
    <i>
      <font color="#FF9933">
        <font face="Lucida Sans Unicode" style="font-size:
11pt">&nbsp;</font></font><a href="..uye_giris.asp"><font face="Lucida Sans
Unicode" style="font-size: 11pt" color="#FFFFFF">Members </font>
</a> </i>
    </strong>
  </td>
</tr>
</table>
</td>
</tr>
</table></body>

```

//root/ uye_giris.asp

KURT COMPUTER

Home Page

Computer Parts

Register

Members

PLEASE ENTER USER NAME AND PASSWORD

S

User Name :	<input type="text" value="saykurt"/>
Password :	<input type="password" value="****"/>
<input type="button" value="*** SEND ***"/>	

K

www.sayginkurt.com***www.sayginkurt.com***www.sayginkurt.com***

uye_giris.asp

```

<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>***** Members Login *****</title>
</head>
<!--#include virtual="sayfatop.htm"-->
<% if Request.QueryString("donus")="sifre" then%>
  <body link="#000080" vlink="#000080" alink="#000080" text="#000080">
  <h4 align="center"> <font color="#FF0000"><span style="font-weight: 400">
  <font face="Lucida Sans Unicode"><i>Wrong Password</i></font></span></h4>
<% Elseif Request.QueryString("donus")="kullanici_ismi" then%>
  <h4 align="center"> <span style="font-weight: 400">
  <font face="Lucida Sans Unicode"><i>Wrong User
Name</i></font></span></font></h4>
  <p> &nbsp;</p>
  <table border="0" cellpadding="0" cellspacing="0" style="border-collapse:
collapse" bordercolor="#111111" width="100%" id="AutoNumber3">
    <tr>
      <td width="100%">
&nbsp;</td>
    </tr>
  </table>
  <% end if%>
  <FORM action = "uye_giris_islem.asp" method="post" onsubmit="return
FrontPage_Form1_Validator(this)" name="FrontPage_Form1" >
  <B>
  <hr>
  <p>&nbsp;</p>
  <table border="0" cellpadding="0" cellspacing="0" style="border-collapse: collapse"
bordercolor="#111111" width="100%" id="AutoNumber2" height="1">
    <tr>
      <td width="100%" height="1" colspan="3"></td>
    </tr>
  </table>

```



```

<tr>
  <td width="30%" height="20">&nbsp;</td>
  <td width="43%" height="20">
    <i>
      <font face="Lucida Sans Unicode" style="font-size: 13pt"
color="#FF6600">PLEASE ENTER USER NAME AND
PASSWORD</font></i></td>
    <td width="27%" height="20">&nbsp;</td>
  </tr>
</table>
<p style="margin-top: 0; margin-bottom: 0">&nbsp;</p>
<table border="0" cellpadding="0" cellspacing="0" style="border-collapse: collapse"
bordercolor="#111111" width="100%" id="AutoNumber1"
bordercolordark="#000080" bordercolorlight="#000080">
  <tr>
    <td width="33%">
      <p align="center">&nbsp;<i><font color="#FF6600" size="7">S</font></i></p>
    </td>
    <td width="33%">
      <TABLE border=1 cellPadding=2 cellSpacing=0 bgcolor=#FFFFFF width="298"
bordercolorlight="#000080" bordercolordark="#000080" style="border-collapse:
collapse" bordercolor="#111111" >
        <TR>
          <TD align="right" width="155">
            <p align="center"><i><font face="Lucida Sans Unicode" style="font-size: 11pt"
color="#FF6600">User Name :</font></i></TD>
          <TD width="130">
            <p align="center">
              <INPUT maxLength=12 name=kullanici_ad size=22></TD>
            <TR>
              <b></b>
            <TR>
              <TD align="right" width="155">

```

```

    <p align="center"><i><font face="Lucida Sans Unicode" style="font-size: 11pt"
color="#FF6600">Password
    :</font>
    </i>
    <B>
    </b>
    </TD>
</TR>
<TR>
    <TD width="130">
    <p align="center">
    <!--webbot bot="Validation" b-value-required="TRUE" i-minimum-length="4"
    i-maximum-length="12" --><INPUT type=password maxLength=12 name=sifre
size=22></TD>
    </TR>
    <TR>
    <TD width="155">
    <p align="center"></TD>
    <TD width="130">
    <p align="center">
    <font color="#FF6600"><span style="background-color: #FFCC66">
    <INPUT type=submit value="*** SEND***" style="color: #000080; font-family:
Lucida Sans Unicode"></span></font></TD>
    </TR>
</TABLE>
</b></b>
</td>
    <td width="34%">
    <p align="center"><b><i><font color="#000000" size="7">&nbsp;</font><font
color="#FF6600" size="7">K</font></i></b></td>
    </tr>
</table>
<B>
<p align="center" style="margin-top: 0; margin-bottom: 0">&nbsp;</p>

```

```

<p align="center" style="margin-top: 0; margin-bottom: 0"><i>
<font color="#FF6600">
<marquee>www.sayginkurt.com***www.sayginkurt.com***www.sayginkurt.com**
*www.sayginkurt.com</marquee>
</font>
</i></p>
<p align="center" style="margin-top: 0; margin-bottom: 0">&nbsp;</p>
<hr>
</FORM>
</BODY>
</HTML>

```

//root/uye_giris_islem.asp

KURT COMPUTER

[Home Page](#)

[Computer Parts](#)

[Requies](#)

[Members](#)

Welcome to Web Page anygin

[Organize My Page](#)

[My Page](#)

uye_giris_islem.asp

<html>

<head>

<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">


```

<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>***** Members Login *****</title>
</head>
<!--#include virtual="sayfatop.htm"-->
<% if Request.QueryString("donus")="sifre" then%>
    <body link="#000080" vlink="#000080" alink="#000080" text="#000080">
    <h4 align="center"> <font color="#FF0000"><span style="font-weight: 400">
    <font face="Lucida Sans Unicode"><i>Wrong Password</i></font></span></h4>
<% Elseif Request.QueryString("donus")="kullanici_ismi" then%>
    <h4 align="center"> <span style="font-weight: 400">
    <font face="Lucida Sans Unicode"><i>Wrong User
Name</i></font></span></font></h4>
    <p> &nbsp;</p>
    <table border="0" cellpadding="0" cellspacing="0" style="border-collapse:
collapse" bordercolor="#111111" width="100%" id="AutoNumber3">
        <tr>
            <td width="100%">
&nbsp;</td>
        </tr>
    </table>
    <% end if%>
    <FORM action = "uye_giris_islem.asp" method="post" onsubmit="return
FrontPage_Form1_Validator(this)" name="FrontPage_Form1" >
    <B>
    <hr>
    <p>&nbsp;</p>
    <table border="0" cellpadding="0" cellspacing="0" style="border-collapse: collapse"
bordercolor="#111111" width="100%" id="AutoNumber2" height="1">
        <tr>
            <td width="100%" height="1" colspan="3"></td>
        </tr>
        <tr>
            <td width="30%" height="20">&nbsp;</td>
            <td width="43%" height="20">

```

```

<i>
  <font face="Lucida Sans Unicode" style="font-size: 13pt"
color="#FF6600">PLEASE ENTER USER NAME AND
PASSWORD</font></i></td>
  <td width="27%" height="20">&nbsp;</td>
</tr>
</table>
<p style="margin-top: 0; margin-bottom: 0">&nbsp;</p>
<table border="0" cellpadding="0" cellspacing="0" style="border-collapse: collapse"
bordercolor="#111111" width="100%" id="AutoNumber1"
bordercolordark="#000080" bordercolorlight="#000080">
  <tr>
    <td width="33%">
      <p align="center">&nbsp;<i><font color="#FF6600" size="7">S</font></i></p>
    </td>
    <td width="33%">
      <TABLE border=1 cellPadding=2 cellSpacing=0 bgcolor=#FFFFFF width="298"
bordercolorlight="#000080" bordercolordark="#000080" style="border-collapse:
collapse" bordercolor="#111111" >
        <TR>
          <TD align="right" width="155">
            <p align="center"><i><font face="Lucida Sans Unicode" style="font-size: 11pt"
color="#FF6600">User Name :</font></i></TD>
          <TD width="130">
            <p align="center">
              <INPUT maxLength=12 name=kullanici_ad size=22></TD>
            </TR>
          <b></b>
        <TR>
          <TD align="right" width="155">
            <p align="center"><i><font face="Lucida Sans Unicode" style="font-size: 11pt"
color="#FF6600">Password
            </font>

```

```

</i>
<B>
</b>
</TD>
<B>
<B>
<TD width="130">
<p align="center">
<!--webbot bot="Validation" b-value-required="TRUE" i-minimum-length="4"
i-maximum-length="12" --><INPUT type=password maxLength=12 name=sifre
size=22></TD>
</TR>
<TR>
<TD width="155">
<p align="center"></TD>
<TD width="130">
<p align="center">
<font color="#FF6600"><span style="background-color: #FFCC66">
<INPUT type=submit value="*** SEND***" style="color: #000080; font-family:
Lucida Sans Unicode"></span></font></TD>
</TR>
</TABLE>
</b></b>
</td>
<td width="34%">
<p align="center"><b><i><font color="#000000" size="7">&nbsp;</font><font
color="#FF6600" size="7">K</font></i></b></td>
</tr>
</table>
<B>
<p align="center" style="margin-top: 0; margin-bottom: 0">&nbsp;</p>
<p align="center" style="margin-top: 0; margin-bottom: 0"><i>
<font color="#FF6600">

```



```

<marquee>www.sayginkurt.com***www.sayginkurt.com***www.sayginkurt.com**
*www.sayginkurt.com</marquee>
</font>
</i></p>
<p align="center" style="margin-top: 0; margin-bottom: 0">&nbsp;</p>
<hr>
</FORM>
</BODY>
</HTML>

```

//ROOT/BENIM_SAYFAM

//root/benim_sayfam/sayfam.asp

KURT COMPUTER



CHOSEN ITEMS

501- 15" Acer
 502- 17" Acer V771 (.27)
 503- 17" Mitsubishi 1770G (.27)
 504- 19" Proview
 505- 19" Hitachi CM721 Flat (.21)
 506- 21 " Mitsubishi 2107 (.26)
 1101- Canon N640P
 1102- Canon N650U
 1103- Epson Perfection 1250
 1104- Epson 1250 Photo
 1105- Epson 1650 Photo

[Restore My Page](#)

[Continue Shopping](#)

sayfam.asp

```

<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>***** My Page *****</title>

```

```

<!--#include virtual="../sayfatop.htm"-->
</head>
<br><br><br>
<%if Request.Cookies("giris")("kullanici_ismi")="" then%>
  <i>Özür dileriz, bu sayfaya girebilmek için üye olmanız gereklidir.</i>
  <a href="kayit.asp"><font color="#000000"><i>Üye olmak için</i></font></a><br>
  <i><font color="#000000">
Zaten üye iseniz </font> <a href="uye_giris.asp"><font color="#000000">sayfaya
giriş için
</font> </a><font color="#000000">tıklayınız.
<%else%>
</font></i>
<h4><font color="#000000"><i>CHOSEN ITEMS</i></font></h4>
<%
kullanici_ad=Request.Cookies("giris")("kullanici_ismi")
set veritabani=Server.CreateObject("ADODB.Connection")
veritabani.open "computer"
set ziyaretci_say=veritabani.Execute("select * from ziyaretci_sayfalari where
kullanici_ismi=""&kullanici_ad&"" order by kategori_id")
if ziyaretci_say.EOF then
ilk="insert into ziyaretci_sayfalari(kategori_id,kullanici_ismi) values
(0,"&kullanici_ad&"" ) "
veritabani.Execute (ilk)
end if
set ziyaretci_kat=veritabani.Execute("select distinct(comp_kategori.comp_id) from
ziyaretci_sayfalari,comp_kategori where
comp_kategori.kategori_id=ziyaretci_sayfalari.kategori_id and
kullanici_ismi=""&kullanici_ad&"" order by comp_id" )
while not ziyaretci_kat.EOF
set complar=veritabani.Execute("select * from complar")
while not complar.EOF
if complar("comp_id")=ziyaretci_kat("comp_id")then
  Response.Write ziyaretci_kat("comp_id")&"- "
Response.Write complar("comp_ismi")&"<BR>"

```

```

end if
complar.movenext
wend
complar.close
set complar=nothing
ziyaretci_kat.movenext
wend
ziyaretci_kat.close
set ziyaretci_kat=nothing
*-----comp kategorileri yordamı sonu-----

%>
<H4><a href="sayfami_duzenle.asp"><font color="#000000"><i>Restore My
Page</i></font></A></H4>
<H4><a href=" ../comp_kategorileri.asp"><font color="#000000"><i>Continue
Shopping</i></font></A></H4>
<center><!--#include virtual=" ../comp_sayfalari/back.inc"--></center>
<%end if%>
</HTML>

```

//root/ benim_sayfam/sayfami_duzenle.asp

KURT COMPUTER

Home Page Computer Parts Peripherals Monitors

You want to display item.

- ☐ Main Boards
- ☐ Video Adapters
- ☐ Cpu
- ☐ Hard Drives
- ☒ Monitors
- ☐ CDRom Drivers
- ☐ Sound Cards
- ☐ Modems
- ☐ Keyboards
- ☐ Printers
- ☐ Scanners

Display

[BACK](#)

sayfami_düzenle.asp

```

<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>***** Restore My Page *****</title>
<!--#include virtual="../sayfatop.htm"-->
</head>
<br><br><br>
<% @ LANGUAGE=VBScript CODEPAGE=1254 %>
<%
if Request.Cookies("giris")("kullanici_ismi")="" then%>
&nbsp;<p align="center"><i><b><font color="#FF6600">Sorry ! . </font>
<a href="../kayit.asp"><font color="#FF6600">If you want to
member</font></a><font color="#FF6600"><br><br><br>
Already member </font> <a href="../uye_giris.asp"><font color="#FF6600">For
login page
</font> </a><font color="#FF6600">click here.
<%else%> You want to display item.<br>
</font></b></i>
</p>
<FORM ACTION="sayfami_düzenle_islem.asp" method="post">
<%
kullanici_ad=Request.Cookies("giris")("kullanici_ismi")
veritabani=Server.CreateObject("ADODB.Connection")
veritabani.open "computer"
set ziyaretcı_say=veritabani.Execute("select * from ziyaretcı_sayfalari where
kullanici_ismi=""&kullanici_ad&" order by kategori_id")
if ziyaretcı_say.EOF then
Ek="insert into ziyaretcı_sayfalari(kategori_id,kullanici_ismi) values
("&kullanici_ad&" " "

```

```

veritabani.Execute (ilk)
end if
set ziyaretci_say=veritabani.Execute("select * from ziyaretci_sayfalari where
kullanici_ismi='"&kullanici_ad&"' order by kategori_id")
set kategori=veritabani.Execute("select * from kategori order by kategori_id")
ziyaretci_say.movenext
while not kategori.EOF
%>
<INPUT TYPE="checkbox" NAME="kategori"
VALUE="<%=kategori("kategori_id")%>"
<% if not ziyaretci_say.EOF then
if kategori("kategori_id") = ziyaretci_say("kategori_id") then%>
        CHECKED
<%
ziyaretci_say.MoveNext
end if
end if
%>
>
<%=kategori("kategori_ismi")%><br>
<%kategori.MoveNext
wend
set onay=veritabani.Execute("SELECT * from ziyaretci_sayfalari where
kullanici_ismi='"&kullanici_ad&"' and kategori_id=0")
%>
<br>
<input type=submit value="*** Display***" style="color: #000080">
</form>
<center><!--#include virtual=" ../comp_sayfalari/back.inc"--></center>
<%
kategori.close
set kategori=nothing
onay.close
set onay=nothing

```

```

veritabani.Close
set veritabani=nothing
end if
%>
</HTML>

```

//ROOT/COMP_SAYFALARI

```
//root/comp_sayfalari/asus1.asp?comp_id=
```

```

<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>***** SAYGIN KURT (MOTHERBOARD)*****</title>
</head>
<!--#include virtual="../sayfatop.htm"-->
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<br><br><br><br><br>
<p></p>
<p></p>
<p align="center"><b><i><font size="5"
color="#FF6600">MOTHERBOARD</font></i></b></p>
<p align="center"></p>
<center><!--#include virtual="../satis/sepet.inc"--></center>
<center><!--#include virtual="../comp_sayfalari/back.inc"--></center>
</BODY>
</HTML>

```


//root/comp_sayfalari/cdrom.asp?comp_id=

cdrom.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>***** SAYGIN KURT (CD-ROM) *****</title>
</head>
<!--#include virtual="../sayfatop.htm"-->
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<br><br><br><br><br>
<p></p>
<p></p>
<p align="center"><b><i><font size="5"
color="#FF6600">CDRom</font></i></b></p>
<p align="center"></p>
<center><!--#include virtual="../satis/sepet.inc"--></center>
<center><!--#include virtual="../comp_sayfalari/back.inc"--></center>
</BODY>
</HTML>
```

//root/comp_sayfalari/cpu.asp?comp_id=

cpu.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>***** SAYGIN KURT (CPU) *****</title>
</head>
<!--#include virtual="../sayfatop.htm"-->
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
```

```

<br><br><br><br><br>
<p></p>
<p></p>
<p align="center"><b><i><font size="5" color="#FF6600">AMD
CPU</font></i></b></p>
<p align="center"></p>
<center><!--#include virtual="../satis/sepet.inc"--></center>
<center><!--#include virtual="../comp_sayfalari/back.inc"--></center>
</BODY>
</HTML>

```

//root/comp_sayfalari/ekran.asp?comp_id=

ekran.asp

```

<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>***** SAYGIN KURT (VIDEO CARD)*****</title>
</head>
<!--#include virtual="../sayfatop.htm"-->
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<br><br><br><br><br>
<p></p><p></p>
<p align="center"><b><i><font size="5" color="#FF6600">VIDEO
CARD</font></i></b></p>
<p align="center"></p>
<center><!--#include virtual="../satis/sepet.inc"--></center>
<center><!--#include virtual="../comp_sayfalari/back.inc"--></center>
</BODY>
</HTML>

```

//root/comp_sayfalari/harddisk.asp?comp_id=

harddisk.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>***** SAYGIN KURT (HARDDISK)*****</title>
</head>
<!--#include virtual="../sayfatop.htm"-->
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<br><br><br><br><br>
<p></p>
<p></p>
<p align="center"><b><i><font size="5" color="#FF6600">HARD
DRIVES</font></i></b></p>
<p align="center"></p>
<center><!--#include virtual="../satis/sepet.inc"--></center>
<center><!--#include virtual="../comp_sayfalari/back.inc"--></center>
</BODY>
</HTML>
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>***** SAYGIN KURT (KEYBOARD)*****</title>
</head>
<!--#include virtual="../sayfatop.htm"-->
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<br><br><br><br><br>
<p></p>
<p></p>
```



```

<p align="center"><b><i><font size="5"
color="#FF6600">KEYBOARD</font></i></b></p>
<p align="center"></p>
<center><!--#include virtual="../satis/sepet.inc"--></center>
<center><!--#include virtual="../comp_sayfalari/back.inc"--></center>
</BODY>
</HTML>

```

//root /comp_sayfalari/modem.asp?comp_id=

modem.asp

```

<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>***** SAYGIN KURT (MODEM)*****</title>
</head>
<!--#include virtual="../sayfatop.htm"-->
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<br><br><br><br><br>
<p></p>
<p></p>
<p align="center"><b><i><font size="5"
color="#FF6600">MODEM</font></i></b></p>
<p align="center"></p>
<center><!--#include virtual="../satis/sepet.inc"--></center>
<center><!--#include virtual="../comp_sayfalari/back.inc"--></center>
</BODY>
</HTML>

```

//root/comp_sayfalari/monitor.asp?comp_id=

monitor.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>***** SAYGIN KURT (MONITOR)*****</title>
</head>
<!--#include virtual="../sayfatop.htm"-->
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<br><br><br><br><br>
<p></p>
<p></p>
<p align="center"><b><i><font size="5"
color="#FF6600">MONITOR</font></i></b></p>
<p align="center"></p>
<center><!--#include virtual="../satis/sepet.inc"--></center>
<center><!--#include virtual="../comp_sayfalari/back.inc"--></center>
</BODY>
</HTML>
```

//root /comp_sayfalari/printer.asp?comp_id=

printer.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>***** SAYGIN KURT (PRINTER)*****</title>
</head>
<!--#include virtual="../sayfatop.htm"-->
```

```

<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<br><br><br><br><br>
<p></p>
<p></p>
<p align="center"><b><i><font size="5" color="#FF6600">HP 640C
PRINTER</font></i></b></p>
<p align="center"></p>
<center><!--#include virtual="../satis/sepet.inc"--></center>
<center><!--#include virtual="../comp_sayfalari/back.inc"--></center>
</BODY>
</HTML>

```

//root/comp_sayfalari/scanner.asp?comp_id=

scanner.asp

```

<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>***** SAYGIN KURT (SCANNER)*****</title>
</head>
<!--#include virtual="../sayfatop.htm"-->
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<br><br><br><br><br>
<p></p>
<p></p>
<p align="center"><b><i><font size="5"
color="#FF6600">SCANNER</font></i></b></p>
<p align="center"></p>
<center><!--#include virtual="../satis/sepet.inc"--></center>
<center><!--#include virtual="../comp_sayfalari/back.inc"--></center>
</BODY>
</HTML>

```



```
//root/comp_sayfalari/sound.asp?comp_id=
```

```
sound.asp
```

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>***** SAYGIN KURT (SOUND CARD)*****</title>
</head>
<!--#include virtual="../sayfatop.htm"-->
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
<br><br><br><br><br>
<p></p>
<p></p>
<p align="center"><b><i><font size="5" color="#FF6600">SOUND
CARD</font></i></b></p>
<p align="center"></p>
<p align="center">&nbsp;</p>
<center><!--#include virtual="../satis/sepet.inc"--></center>
<center><!--#include virtual="../comp_sayfalari/back.inc"--></center>
</BODY>
</HTML>
```

```
//root /comp_sayfalari/back.inc
```

```
<p><center><a href="javascript:history.go(-1)">BACK</a></center></p>
```

```
//ROOT/SATIS
```

```
//root/satis/sepet.asp
```

```
<%comp_id=Request.QueryString("comp_id")
```

```
Response.Write comp_id
```

```
%>
```

//root/satis/sepet.inc

```
<%comp_id=Request.QueryString("comp_id")%>
```

```
<a href="../../satis/sepete_ekle.asp?comp_id=<%=comp_id%>">Add Basket</a>
```

//root/satis/sepet_ekle.asp



sepet_ekle.asp

```
<html>
```

```
<head>
```

```
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
```

```
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
```

```
<title>***** Add to the Basket *****</title>
```

```
</head><% @ LANGUAGE=VBScript CODEPAGE=1254 %>
```

```
<!--#include virtual="../../sayfatop.htm"-->
```

```
<body>
```

```
<br><br><br><br><br><br>
```

```
<p><center>
```

```
<%
```

```
comp_id=Request.QueryString("comp_id")
```

```
set veritabani=Server.CreateObject("ADODB.Connection")
```

```
veritabani.open "computer"
```

```

comp=veritabani.Execute("select * from complar where
cstr(comp_id)='"+&comp_id&'"")
Response.Write "<h4>"&comp("comp_ismi")&" "
%>&nbsp;</center>

```

```
<div align="center">
```

```
<center>
```

```
<TABLE WIDTH="100%" style="border-collapse: collapse" bordercolor="#111111"
cellpadding="0" cellspacing="0">
```

```
<TR><TD WIDTH="75%">
```

```
<FORM ACTION="sepete_ekle_islem.asp" METHOD="post">
```

```
<div align="center">
```

```
<center>
```

```
<TABLE border=1 bgcolor=#C0C0C0 style="border-collapse: collapse"
bordercolor="#111111" width="228">
```

```
<TR><TD ALIGN="center" width="224">
```

```
<INPUT TYPE="hidden" NAME="comp_id"
```

```
VALUE="<%=comp_id%>"><i><font color="#000000"><INPUT
TYPE="text" SIZE="6" NAME="adet"
```

```
VALUE="1" maxlength="10"> </font>
```

```
<font color="#FF6600">Add Basket&nbsp;</font><font
color="#000000">&nbsp;&nbsp;&nbsp;
```

```
<INPUT TYPE="submit" VALUE="ADD">
```

```
</font>
```

```
</i>
```

```
<P>
```

```
<a href="sepete_gozat.asp"><i><font color="#FF6600">Display
Basket</font></i></a>
```

```
</TD></TR>
```

```
</TABLE>
```

```
</center>
```

```
</div>
```




```
</FORM>
</TD></TR>
</TABLE>
</center>
</div>
</body></html>
```

//root/satis/sepete_ekle_islem.asp

KURT COMPUTER

Home Page

Computer Parts

Register

Members

The Item was Added.

[Back to Computer Parts](#)

[Display Basket](#)

sepete_ekle_islem.asp

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>***** Add to the Basket *****</title>
</head><% @ LANGUAGE=VBScript CODEPAGE=1254 %>
<!--#include virtual="../sayfatop.htm"-->
<br><br><br><br>
<%
Sub YeniSiparis
Application.Lock
Session("siparis_id")=Application("siparis_id")
```

```

s_siparis_id=cstr(Session("siparis_id"))
Application("siparis_id")=Application("siparis_id")+1
Application.Unlock
end sub
Sub SiparisEkle(d_siparis_id,d_comp_id,d_adet)

SQLsorgu="insert into siparis_kalemleri (siparis_id,comp_id,adet) values
("&d_siparis_id&", "&d_comp_id&", "&d_adet&")"
veritabani.Execute(SQLsorgu)
end sub
comp_id=Request.Form("comp_id")
adet=Request.Form("adet")
set veritabani = Server.CreateObject("ADODB.Connection")
    veritabani.Open "computer"
        s_siparis_id=cstr(Session("siparis_id"))
        if s_siparis_id="" then
            YeniSiparis
        end if
set siparis_tek=veritabani.Execute("select * from siparis_kalemleri where
cstr(siparis_id)='"&s_siparis_id&'" and cstr(comp_id)='"&comp_id&'"")
if not siparis_tek.EOF then%>
<i><font color="#FF6600">This item has already put in to your basket. If you want
to buy more from
this item<br>
Please </font> <a href="sepete_gozat.asp"> <font color="#FF6600"> after clicking
here</font></a> <font color="#FF6600"> identify the number you want to buy on the
number section.<br>
</font>
<a href=" ../comp_kategorileri.asp"><font color="#FF6600">Click for Computer
Categories</font></a>
<font color="#000000"> </font>
</i>
<font color="#FF6600">
<%else

```

SiparisEkle s_siparis_id,comp_id,adet

veritabani.Execute ("insert into siparisler (siparis_id) values ("&s_siparis_id&")")

%>

<TABLE WIDTH="100%">

<TR>

<TD ALIGN="center">

<h4><i>The Item was Added.</i></h4>

<P>

<i>Back to

Computer Parts</i>

<P>

<i>Display

Basket</i>

<P>

</TD>

<TD>

<P>

</TD></TR>

</TABLE>

<% end if

veritabani.Close

set veritabani = Nothing

%>

</html>

//root/satis/sepete_gozat.asp

KURT COMPUTER

[Home Page](#)
[Computer Parts](#)
[Register](#)
[Members](#)

BASKET

Please check your basket, write the number on the number section to get a product out of basket.

Computer Part Name	Units	Unit Price	Unit Total
3.5" Maxtor Mega Easraid	2	50.000	100.000
19" Monitor	3	28.000	84.000
Asus C2460A2700	1	28.000	28.000
20GB Seagate ST07200Rpm ATA/100	2	35.000	70.000
RAM Asus 17100 AG100 T700u	2	45.000	90.000
10000 Seagate ST07200Rpm ATA/100	1	82.000	82.000
17" Monitor T7000 i27	1	22.000	22.000
Total:			382.000

[Continue shopping](#)

sepete_gozat.asp

```
<html>
```

```
<head>
```

```
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
```

```
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
```

```
<title>***** Display Basket *****</title>
```

```
</head><% @ LANGUAGE=VBScript CODEPAGE=1254 %>
```

```
<!--#include virtual="./sayfatop.htm"-->
```

```
<!--#include virtual="./adovbs.inc"-->
```

```
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
```

```
<br><br><br><br>
```

```
<%
```

```
set veritabani = Server.CreateObject("ADODB.Connection")
```

```
veritabani.Open "computer"
```

```
if cstr(Session("siparis_id")) = "" then%>
```

```
<p><i>
```

```
<font color="#FF6600">
```

```
There is still no available order or your session expired.</font></i><p>
```

```

<i>
<a href=" ../comp_kategorileri.asp"><font color="#FF6600">select an item for your
order.</font></a>
<font color="#FF6600">
<% else
    s_siparis_id = cstr(Session("siparis_id"))
    sqlText = "select complar.comp_id, comp_ismi, " _
        & "fiyat_TL,adet from complar, " _
        & "siparis_kalemleri where " _
        & "complar.comp_id = siparis_kalemleri.comp_id " _
        & "and siparis_kalemleri.siparis_id = " & s_siparis_id
%>
</font></i>
<H2><i><font color="#FF6600">BASKET</font></i></H2>
<font color="#FF6600">
    Please check your basket. write the number on the number section to get a
product out of basket.</font>
    <FORM ACTION="sepete_gozat_islem.asp" METHOD="post">
    <TABLE border=1 WIDTH="100%" bgcolor=#C0C0C0 style="border-
collapse: collapse" bordercolor="#111111" cellpadding="2"
bordercolorlight="#000080" bordercolordark="#000080">
        <TR>
            <TH ALIGN="left"><i><font color="#FF6600">Computer Part
Name</font></i></TH>
            <TH ALIGN="left"><i><font color="#FF6600">Unit</font></i></TH>
            <TH ALIGN="left"><i><font color="#FF6600">Unit Price</font></i></TH>
            <TH ALIGN="left"><i><font color="#FF6600">Unit Total</font></i></TH>
        </TR>
    <%
        set gozatSet = veritabani.Execute(sqlText)
        while not gozatSet.EOF
            d_comp_id = gozatSet("comp_id")
            d_comp_ismi = gozatSet("comp_ismi")
            d_fiyat = gozatSet("fiyat_TL")
            d_adet = gozatSet("adet")

```

```
d_toplam = d_toplam + (d_adet * d_fiyat)
```

```
%>
```

```
<TR>
```

```
<TD>
```

```
<i><font color="#FF6600">
```

```
<%=d_comp_ismi%> &nbsp;  </font></i></TD>
```

```
<TD>
```

```
<i><font color="#000000">
```

```
<INPUT NAME="quant<%=d_comp_id%>" TYPE="text"
```

```
SIZE=10 SIZE=10 VALUE="<%=d_adet%>" maxlength="10">
```

```
</font></i>
```

```
</TD>
```

```
<TD align=ALIGN="right">
```

```
<i><font color="#FF6600">
```

```
<%= formatNumber(d_fiyat, 2) %>$</font></i>
```

```
</TD><TD align=ALIGN="right">
```

```
<i><font color="#FF6600">
```

```
<%= formatNumber((d_adet * d_fiyat)) %>$</font></i></TD>
```

```
</TR>
```

```
<% gozatSet.MoveNext
```

```
wend
```

```
gozatSet.Close
```

```
set gozatSet = Nothing
```

```
%>
```

```
<TR>
```

```
<TD><i><font color="#FF6600">Total:</font></i></TD>
```

```
<TD COLSPAN="3" ALIGN="right">
```

```
<i><font color="#000000">
```

```
<%= formatNumber(d_toplam,2) %></font><font
```

```
color="#FF6600">$</font></i>
```

```
</TD>
```

```
</TR>
```

```
</TABLE>
```



```
<INPUT TYPE="submit" NAME="buton" VALUE="*** Refresh Total ***"
style="color: #000080">
```

```
<INPUT TYPE="submit" NAME="buton" VALUE="*** Order***"
style="color: #000080">
```

```
</FORM>
```

```
<p align="center"><a href="../comp_kategorileri.asp"><i><font
color="#FF6600">Continue shopping</font></i></a></p>
```

```
<%
```

```
end if
```

```
veritabani.Close
```

```
set veritabani = Nothing
```

```
%>
```

```
</BODY>
```

```
</HTML>
```

//root/satis/sepete_gozat_islem.asp

KURT COMPUTER

» [Sepete Ekle](#) » [Sepetinizi Gözetin](#) » [Sepetinizi Silin](#) » [Müşteri](#)

Code	Computer Part Name	Unit	Unit Price	Unit Total
			\$	\$
Bottom Total :				\$
Transport (5%):				\$
Total :				\$

Order Info

Name :	Saygin
Surname :	kurt
Address1 :	Gazi mah.37. sok. irtak. apt. kat:5 no:20
Address2 :	
City :	Silifke/Mersin
Zip Code :	33960
Telephone Number :	0252 712 3117
<input checked="" type="radio"/> MasterCard <input type="radio"/> Visa <input type="radio"/> American Express	
Card Number :	5400124585232000
On Card Name :	saygin kurt
<div>*** ORDER ***</div>	

sepete_gozat_islem.asp

<html>

<head>

<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">

<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">

<title>***** Order Page *****</title>

<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">

<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">

<title>.....: Order Page :.....</title>

```

<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>Sepete gozat islem</title>
</head>
<!--#include virtual="../sayfatop.htm"-->
<!--#include virtual="../sayfatop.htm"-->
<%@ LANGUAGE="VBSCRIPT" %>
<!--#include virtual="../adovbs.inc"-->
<%
set veritabani = Server.CreateObject("ADODB.Connection")
veritabani.Open "computer"
if cstr(Session("siparis_id")) = "" then
%>
<body link="#000080" vlink="#000080" alink="#000080" text="#000080">
    <br><br><br>
    <p align="center"><i><font color="#FF6600">There is still no available order or
your session expired.</font></i></p>
    <p align="center">
    <i>
    <font color="#FF6600">
Please choose one computer part for order.</font></i>
    <H2 align="center"><i><font color="#FF6600">ORDER</font></i></H2>
    <p align="center">
    <a href="sepete_gozat.asp"><i><font color="#FF6600">Change
Order</font></i></a> </p>
    <P>
    <FORM ACTION="siparis_ekle.asp" METHOD="post">
    <INPUT TYPE="hidden" NAME="s_siparis_id" VALUE="<%=s_siparis_id%>">
        <div align="center">
            <center>
                <TABLE border=1 bgcolor=#C0C0C0 style="border-collapse: collapse"
bordercolor="#111111" cellpadding="2" width="648">
                    <TR>

```



```

<TH width="55"><i><font color="#FF6600">Code</font></i></TH>
<TH width="376"><i><font color="#FF6600">Computer Part
Name</font></i></TH>
<TH width="32"><i><font color="#FF6600">Unit</font></i></TH>
<TH width="81"><i><font color="#FF6600">Unit Price</font></i></TH>
<TH width="78"><i><font color="#FF6600">Unit
Total</font></i></TH>
</TR>
<%
set comp_tanSet = Server.CreateObject("ADODB.RecordSet")
comp_tanSet.Open "complar", veritabani, _
    adOpenStatic, adLockOptimistic, adCmdTable
d_toplam = 0
compSet.MoveFirst
while not compSet.EOF
    comp_tanSet.MoveFirst
    comp_tanSet.Find "comp_id = " & compSet("comp_id")
    d_comp_id = compSet("comp_id")
    d_comp_ismi = comp_tanSet("comp_ismi")
    d_fiyat = formatNumber( comp_tanSet("fiyat_TL"), 2)
    d_adet = compSet("adet")
    d_birimTutar = formatNumber((d_fiyat * d_adet), 2)
    d_toplam = d_toplam + d_birimTutar
%>
<TR>
<TD width="55"><i><font color="#FF6600"><%=
d_comp_id%>&nbsp;</font></i></TD>
<TD width="376"><i><font color="#FF6600"><%= d_comp_ismi
%>&nbsp;</font></i></TD>
<TD width="32"><i><font color="#FF6600"><%= d_adet
%>&nbsp;</font></i></TD>
<TD ALIGN="right" width="81"><i><font color="#FF6600">$<%=
d_fiyat %></font></i></TD>

```

```

        <TD ALIGN="right" width="78"><i><font color="#FF6600">$<%=
d_birimTutar %></font></i></TD>
    </TR>
    <INPUT TYPE="hidden" NAME="siparisler_id"
        VALUE="<%=d_comp_id%>,<%=d_adet%>">
<%
    compSet.MoveNext
wend
%>
<TR>
    <TD COLSPAN = 4 width="254"> <i> <font color="#FF6600"> Bottom
Total :</font></i></TD>
    <TD ALIGN=right width="78">
        <i>
        <font color="#FF6600">
        $<%= formatNumber(d_toplam, 2) %>
        </font>
        </i>
    </TD>
</TR>
<TR>
    <TD COLSPAN = 4 width="254"> <i> <font color="#FF6600">
Transport&nbsp; (5%):</font></i></TD>
    <TD ALIGN=right width="78">
        <i>
        <font color="#FF6600">
        $<%= formatNumber((d_toplam*.05), 2) %>
        <INPUT TYPE="hidden" NAME="d_ulasim"
            VALUE="<%=d_toplam*.05%>">
        </font>
        </i>
    </TD>
</TR>
<TR>

```

```

        <TD COLSPAN = 4 width="254"> <i> <font color="#FF6600"> Total
: </font></i></TD>
        <TD ALIGN=right width="78">
            <i>
            <font color="#FF6600">
            $<%= formatNumber((d_toplam*1.05), 2) %>
            <INPUT TYPE="hidden" NAME="d_toplam"
                VALUE="<%=d_toplam%>">
            </font>
            </i>
        </TD>
    </TR>
</TABLE>
</center>
</div>

<P>

<H3 align="center"><i><font color="#FF6600">Order Info</font></i></H3>
<div align="center">
    <center>
        <TABLE bgcolor=#C0C0C0 style="border-collapse: collapse"
bordercolor="#111111" cellpadding="2" width="457">
            <TR>
                <TD width="216"><i><font color="#FF6600">Name :</font></i></TD>
                <TD width="233">
                    <INPUT TYPE="text" NAME="ad" SIZE="35"></TD>
            </TR>
            <TR>
                <TD width="216"><i><font color="#FF6600">Surname:</font></i></TD>
                <TD width="233">
                    <INPUT TYPE="text" NAME="soyad" SIZE="35">
                </TD>
            </TR>
            <TR>

```



```

        <TD width="216"><i><font
color="#FF6600">Address1:</font></i></TD>
        <TD width="233">
        <INPUT TYPE="text" NAME="adres1" SIZE=45>
        </TD>
    </TR>
    <TR>
        <TD width="216"><i><font
color="#FF6600">Address2:</font></i></TD>
        <TD width="233">
        <INPUT TYPE="text" NAME="adres2" SIZE=45>
        </TD>
    </TR>
    <TR>
        <TD width="216"><i><font color="#FF6600">City :</font></i></TD>
        <TD width="233">
        <INPUT TYPE="text" NAME="sehir" SIZE=25></TD>
    </TR>

    <TR>
        <TD width="216"><i><font color="#FF6600">Zip Code
:</font></i></TD>
        <TD width="233">
        <INPUT TYPE="text" NAME="postakodu" SIZE=18>
        </TD>
    </TR>
    <TR>
        <TD width="216"><i><font color="#FF6600">Telephone Number
:</font></i></TD>
        <TD width="233">
        <INPUT TYPE="text" NAME="tel" SIZE=25>
        </TD>
    </TR>
    <TR>

```

```

<TD COLSPAN=2 width="383">
  <hr>
  <i>
    <font color="#FF6600">
      <INPUT TYPE="radio" NAME="kk_tipi" VALUE="Master Kart">
      MasterCard
      <INPUT TYPE="radio" NAME="kk_tipi" VALUE="Visa">
      Visa
      <INPUT TYPE="radio" NAME="kk_tipi" VALUE="Amerikan Express">
      American Express</font></i>
    </TD>
  </TR>
  <TR>
    <TD width="216"><i><font color="#FF6600">Card Number
: </font></i></TD>
    <TD width="233">
      <font color="#000000"><i>
        <INPUT TYPE="text" NAME="kk_numarasi" SIZE=38>
      </i></font>
    </TD>
  </TR>
  <TR>
    <TD width="216"><i><font color="#FF6600">On Card Name :</font></i>
</TD>
    <TD width="233">
      <font color="#000000"><i>
        <INPUT TYPE="text" NAME="kk_ust_isim" SIZE=38>
      </i></font>
    </TD>
  </TR>
  <TR>
    <TD COLSPAN=2 ALIGN="center" width="383">
      <font color="#FF6600">

```

```
<!--#include virtual="/comp_sayfalari/bac.inc"-->
</BODY>
</HTML>
<% else
    s_siparis_id= cstr(Session("siparis_id"))
    set compSet = Server.CreateObject("ADODB.RecordSet")
    compSet.Open "select * from siparis_kalemleri " _
    & "where siparis_id=" & s_siparis_id, _
    veritabani, adOpenDynamic, adLockPessimistic, adCmdText
    while not compSet.EOF
        d_gecis = "quant" & compSet("comp_id")
        d_adet = Request.form(d_gecis)
        if d_adet <> "" and isNumeric(d_adet) then
            if d_adet = 0 then
                compSet.Delete
            else
                compSet("adet") = d_adet
            end if
        end if
        compSet.Update
        compSet.MoveNext
    wend
    if Request.form("buton") = "***** Refresh Total *****" then
```



```

compSet.Close
set compSet = Nothing
veritabani.Close
set veritabani = Nothing
Response.Redirect "sepete_gozat.asp"
'Server.Transfer "../satis/sepete_gozat.asp"
else
%>
<%    end if
    end if %>
//root/satis/siparis_ekle.asp

```

KURT COMPUTER

» [Home Page](#)

» [Computer Parts](#)

» [Reviews](#)

» [Members](#)

Order will be delivered after 10 workdays .

Thank you for order KURT Computer Online Shop

**** Exit ****

siparis_ekle.asp

```

<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-9">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1254">
<title>***** Add Order *****</title>
</head>
<!--#include virtual="../adovbs.inc"-->
<!--#include virtual="../sayfatop.htm"-->

```

```

for each item in Request.form("siparisler_id")
    siparisler_id = cstr(item)
    siparisbilgi = split(siparisler_id, ",")
    itemSet.addNew
    itemSet("siparis_id") = s_siparis_id
    itemSet("comp_id") = siparisbilgi(0)
    itemSet("adet") = siparisbilgi(1)
    itemSet.Update
next
itemSet.Close
set itemSet = Nothing
Session.abandon
%>
<p align="center">
<b><i><font color="#FF6600">Order will be delivered after 10 workdays
</font></i>
</b>
</p>
<p align="center">
<b><i><font color="#FF6600">Thank you for order KURT Computer Online Shop
%
end if
siparisSet.Close
set siparisSet = Nothing
veritabani.Close
set veritabani = Nothing
%> </font> </i> </b>
<p align="center">&nbsp;<p align="center"><font color="#FF6600"><Button
onClick="javascript:window.close()"><i>***
exit ***</button></i></font></p>
</BODY>
</HTML>

```

ADO.INC

<%

'-----

' Microsoft ADO

'

' Copyright (c) 1996-1998 Microsoft Corporation.

'

'

'

' ADO constants include file for VBScript

'

'-----

'---- CursorTypeEnum Values ----

Const adOpenForwardOnly = 0

Const adOpenKeyset = 1

Const adOpenDynamic = 2

Const adOpenStatic = 3

'---- CursorOptionEnum Values ----

Const adHoldRecords = &H00000100

Const adMovePrevious = &H00000200

Const adAddNew = &H01000400

Const adDelete = &H01000800

Const adUpdate = &H01008000

Const adBookmark = &H00002000

Const adApproxPosition = &H00004000

Const adUpdateBatch = &H00010000

Const adResync = &H00020000

Const adNotify = &H00040000

Const adFind = &H00080000

Const adSeek = &H00400000

Const adIndex = &H00800000

'---- LockTypeEnum Values ----

Const adLockReadOnly = 1

Const adLockPessimistic = 2

Const adLockOptimistic = 3

Const adLockBatchOptimistic = 4

'---- ExecuteOptionEnum Values ----

Const adAsyncExecute = &H00000010

Const adAsyncFetch = &H00000020

Const adAsyncFetchNonBlocking = &H00000040

Const adExecuteNoRecords = &H00000080

Const adExecuteStream = &H00000400

'---- ConnectOptionEnum Values ----

Const adAsyncConnect = &H00000010

'---- ObjectStateEnum Values ----

Const adStateClosed = &H00000000

Const adStateOpen = &H00000001

Const adStateConnecting = &H00000002

Const adStateExecuting = &H00000004

Const adStateFetching = &H00000008

'---- CursorLocationEnum Values ----

Const adUseServer = 2

Const adUseClient = 3

'---- DataTypeEnum Values ----

Const adEmpty = 0

Const adTinyInt = 16

Const adSmallInt = 2

Const adInteger = 3

Const adBigInt = 20

Const adUnsignedTinyInt = 17
Const adUnsignedSmallInt = 18
Const adUnsignedInt = 19
Const adUnsignedBigInt = 21
Const adSingle = 4
Const adDouble = 5
Const adCurrency = 6
Const adDecimal = 14
Const adNumeric = 131
Const adBoolean = 11
Const adError = 10
Const adUserDefined = 132
Const adVariant = 12
Const adIDispatch = 9
Const adIUnknown = 13
Const adGUID = 72
Const adDate = 7
Const adDBDate = 133
Const adDBTime = 134
Const adDBTimeStamp = 135
Const adBSTR = 8
Const adChar = 129
Const adVarChar = 200
Const adLongVarChar = 201
Const adWChar = 130
Const adVarWChar = 202
Const adLongVarWChar = 203
Const adBinary = 128
Const adVarBinary = 204
Const adLongVarBinary = 205
Const adChapter = 136
Const adFileTime = 64
Const adPropVariant = 138
Const adVarNumeric = 139

Const adArray = &H2000

'---- FieldAttributeEnum Values ----

Const adFldMayDefer = &H00000002

Const adFldUpdatable = &H00000004

Const adFldUnknownUpdatable = &H00000008

Const adFldFixed = &H00000010

Const adFldIsNullable = &H00000020

Const adFldMayBeNull = &H00000040

Const adFldLong = &H00000080

Const adFldRowID = &H00000100

Const adFldRowVersion = &H00000200

Const adFldCacheDeferred = &H00001000

Const adFldIsChapter = &H00002000

Const adFldNegativeScale = &H00004000

Const adFldKeyColumn = &H00008000

Const adFldIsRowURL = &H00010000

Const adFldIsDefaultStream = &H00020000

Const adFldIsCollection = &H00040000

'---- EditModeEnum Values ----

Const adEditNone = &H0000

Const adEditInProgress = &H0001

Const adEditAdd = &H0002

Const adEditDelete = &H0004

'---- RecordStatusEnum Values ----

Const adRecOK = &H00000000

Const adRecNew = &H00000001

Const adRecModified = &H00000002

Const adRecDeleted = &H00000004

Const adRecUnmodified = &H00000008

Const adRecInvalid = &H00000010

Const adRecMultipleChanges = &H00000040


```
Const adRecPendingChanges = &H0000080
Const adRecCanceled = &H0000100
Const adRecCantRelease = &H0000400
Const adRecConcurrencyViolation = &H0000800
Const adRecIntegrityViolation = &H0001000
Const adRecMaxChangesExceeded = &H0002000
Const adRecObjectOpen = &H0004000
Const adRecOutOfMemory = &H0008000
Const adRecPermissionDenied = &H0010000
Const adRecSchemaViolation = &H0020000
Const adRecDBDeleted = &H0040000
```

----- GetRowsOptionEnum Values -----

```
Const adGetRowsRest = -1
```

----- PositionEnum Values -----

```
Const adPosUnknown = -1
Const adPosBOF = -2
Const adPosEOF = -3
```

----- BookmarkEnum Values -----

```
Const adBookmarkCurrent = 0
Const adBookmarkFirst = 1
Const adBookmarkLast = 2
```

----- MarshalOptionsEnum Values -----

```
Const adMarshalAll = 0
Const adMarshalModifiedOnly = 1
```

----- AffectEnum Values -----

```
Const adAffectCurrent = 1
Const adAffectGroup = 2
Const adAffectAllChapters = 4
```

---- ResyncEnum Values ----

Const adResyncUnderlyingValues = 1

Const adResyncAllValues = 2

'---- CompareEnum Values ----

Const adCompareLessThan = 0

Const adCompareEqual = 1

Const adCompareGreaterThan = 2

Const adCompareNotEqual = 3

Const adCompareNotComparable = 4

'---- FilterGroupEnum Values ----

Const adFilterNone = 0

Const adFilterPendingRecords = 1

Const adFilterAffectedRecords = 2

Const adFilterFetchedRecords = 3

Const adFilterConflictingRecords = 5

'---- SearchDirectionEnum Values ----

Const adSearchForward = 1

Const adSearchBackward = -1

'---- PersistFormatEnum Values ----

Const adPersistADTG = 0

Const adPersistXML = 1

'---- StringFormatEnum Values ----

Const adClipString = 2

'---- ConnectPromptEnum Values ----

Const adPromptAlways = 1

Const adPromptComplete = 2

Const adPromptCompleteRequired = 3

Const adPromptNever = 4

'---- ConnectModeEnum Values ----

Const adModeUnknown = 0
 Const adModeRead = 1
 Const adModeWrite = 2
 Const adModeReadWrite = 3
 Const adModeShareDenyRead = 4
 Const adModeShareDenyWrite = 8
 Const adModeShareExclusive = &Hc
 Const adModeShareDenyNone = &H10
 Const adModeRecursive = &H400000

'---- RecordCreateOptionsEnum Values ----

Const adCreateCollection = &H00002000
 Const adCreateStructDoc = &H80000000
 Const adCreateNonCollection = &H00000000
 Const adOpenIfExists = &H02000000
 Const adCreateOverwrite = &H04000000
 Const adFailIfNotExists = -1

'---- RecordOpenOptionsEnum Values ----

Const adOpenRecordUnspecified = -1
 Const adOpenOutput = &H00800000
 Const adOpenAsync = &H00001000
 Const adDelayFetchStream = &H00004000
 Const adDelayFetchFields = &H00008000
 Const adOpenExecuteCommand = &H00010000

'---- IsolationLevelEnum Values ----

Const adXactUnspecified = &Hffffff
 Const adXactChaos = &H00000010
 Const adXactReadUncommitted = &H00000100
 Const adXactBrowse = &H00000100
 Const adXactCursorStability = &H00001000


```
Const adXactReadCommitted = &H00001000
Const adXactRepeatableRead = &H00010000
Const adXactSerializable = &H00100000
Const adXactIsolated = &H00100000
```

'---- XactAttributeEnum Values ----

```
Const adXactCommitRetaining = &H00020000
Const adXactAbortRetaining = &H00040000
```

'---- PropertyAttributesEnum Values ----

```
Const adPropNotSupported = &H0000
Const adPropRequired = &H0001
Const adPropOptional = &H0002
Const adPropRead = &H0200
Const adPropWrite = &H0400
```

'---- ErrorValueEnum Values ----

```
Const adErrProviderFailed = &Hbb8
Const adErrInvalidArgument = &Hbb9
Const adErrOpeningFile = &Hbba
Const adErrReadFile = &Hbbb
Const adErrWriteFile = &Hbbc
Const adErrNoCurrentRecord = &Hbcd
Const adErrIllegalOperation = &Hc93
Const adErrCantChangeProvider = &Hc94
Const adErrInTransaction = &Hcae
Const adErrFeatureNotAvailable = &Hcb3
Const adErrItemNotFound = &Hcc1
Const adErrObjectInCollection = &Hd27
Const adErrObjectNotSet = &Hd5c
Const adErrDataConversion = &Hd5d
Const adErrObjectClosed = &He78
Const adErrObjectOpen = &He79
Const adErrProviderNotFound = &He7a
```

Const adErrBoundToCommand = &He7b
Const adErrInvalidParamInfo = &He7c
Const adErrInvalidConnection = &He7d
Const adErrNotReentrant = &He7e
Const adErrStillExecuting = &He7f
Const adErrOperationCancelled = &He80
Const adErrStillConnecting = &He81
Const adErrInvalidTransaction = &He82
Const adErrUnsafeOperation = &He84
Const adwrnSecurityDialog = &He85
Const adwrnSecurityDialogHeader = &He86
Const adErrIntegrityViolation = &He87
Const adErrPermissionDenied = &He88
Const adErrDataOverflow = &He89
Const adErrSchemaViolation = &He8a
Const adErrSignMismatch = &He8b
Const adErrCantConvertvalue = &He8c
Const adErrCantCreate = &He8d
Const adErrColumnNotOnThisRow = &He8e
Const adErrURLIntegrViolSetColumns = &He8f
Const adErrURLDoesNotExist = &He8f
Const adErrTreePermissionDenied = &He90
Const adErrInvalidURL = &He91
Const adErrResourceLocked = &He92
Const adErrResourceExists = &He93
Const adErrCannotComplete = &He94
Const adErrVolumeNotFound = &He95
Const adErrOutOfSpace = &He96
Const adErrResourceOutOfScope = &He97
Const adErrUnavailable = &He98
Const adErrURLNamedRowDoesNotExist = &He99
Const adErrDelResOutOfScope = &He9a
Const adErrPropInvalidColumn = &He9b
Const adErrPropInvalidOption = &He9c

```

Const adErrPropInvalidValue = &He9d
Const adErrPropConflicting = &He9e
Const adErrPropNotAllSettable = &He9f
Const adErrPropNotSet = &Hea0
Const adErrPropNotSettable = &Hea1
Const adErrPropNotSupported = &Hea2
Const adErrCatalogNotSet = &Hea3
Const adErrCantChangeConnection = &Hea4
Const adErrFieldsUpdateFailed = &Hea5
Const adErrDenyNotSupported = &Hea6
Const adErrDenyTypeNotSupported = &Hea7
Const adErrProviderNotSpecified = &Hea9

```

'---- ParameterAttributesEnum Values ----'

```

Const adParamSigned = &H0010
Const adParamNullable = &H0040
Const adParamLong = &H0080

```

'---- ParameterDirectionEnum Values ----'

```

Const adParamUnknown = &H0000
Const adParamInput = &H0001
Const adParamOutput = &H0002
Const adParamInputOutput = &H0003
Const adParamReturnValue = &H0004

```

'---- CommandTypeEnum Values ----'

```

Const adCmdUnknown = &H0008
Const adCmdText = &H0001
Const adCmdTable = &H0002
Const adCmdStoredProc = &H0004
Const adCmdFile = &H0100
Const adCmdTableDirect = &H0200

```

'---- EventStatusEnum Values ----'


```
Const adStatusOK = &H00000001
Const adStatusErrorsOccurred = &H00000002
Const adStatusCantDeny = &H00000003
Const adStatusCancel = &H00000004
Const adStatusUnwantedEvent = &H00000005
```

'---- EventReasonEnum Values ----'

```
Const adRsnAddNew = 1
Const adRsnDelete = 2
Const adRsnUpdate = 3
Const adRsnUndoUpdate = 4
Const adRsnUndoAddNew = 5
Const adRsnUndoDelete = 6
Const adRsnRequery = 7
Const adRsnResynch = 8
Const adRsnClose = 9
Const adRsnMove = 10
Const adRsnFirstChange = 11
Const adRsnMoveFirst = 12
Const adRsnMoveNext = 13
Const adRsnMovePrevious = 14
Const adRsnMoveLast = 15
```

'---- SchemaEnum Values ----'

```
Const adSchemaProviderSpecific = -1
Const adSchemaAsserts = 0
Const adSchemaCatalogs = 1
Const adSchemaCharacterSets = 2
Const adSchemaCollations = 3
Const adSchemaColumns = 4
Const adSchemaCheckConstraints = 5
Const adSchemaConstraintColumnUsage = 6
Const adSchemaConstraintTableUsage = 7
Const adSchemaKeyColumnUsage = 8
```

Const adSchemaReferentialConstraints = 9
Const adSchemaTableConstraints = 10
Const adSchemaColumnsDomainUsage = 11
Const adSchemaIndexes = 12
Const adSchemaColumnPrivileges = 13
Const adSchemaTablePrivileges = 14
Const adSchemaUsagePrivileges = 15
Const adSchemaProcedures = 16
Const adSchemaSchemata = 17
Const adSchemaSQLLanguages = 18
Const adSchemaStatistics = 19
Const adSchemaTables = 20
Const adSchemaTranslations = 21
Const adSchemaProviderTypes = 22
Const adSchemaViews = 23
Const adSchemaViewColumnUsage = 24
Const adSchemaViewTableUsage = 25
Const adSchemaProcedureParameters = 26
Const adSchemaForeignKeys = 27
Const adSchemaPrimaryKeys = 28
Const adSchemaProcedureColumns = 29
Const adSchemaDBInfoKeywords = 30
Const adSchemaDBInfoLiterals = 31
Const adSchemaCubes = 32
Const adSchemaDimensions = 33
Const adSchemaHierarchies = 34
Const adSchemaLevels = 35
Const adSchemaMeasures = 36
Const adSchemaProperties = 37
Const adSchemaMembers = 38
Const adSchemaTrustees = 39
Const adSchemaFunctions = 40
Const adSchemaActions = 41
Const adSchemaCommands = 42

Const adSchemaSets = 43

'---- FieldStatusEnum Values ----

Const adFieldOK = 0

Const adFieldCantConvertValue = 2

Const adFieldIsNull = 3

Const adFieldTruncated = 4

Const adFieldSignMismatch = 5

Const adFieldDataOverflow = 6

Const adFieldCantCreate = 7

Const adFieldUnavailable = 8

Const adFieldPermissionDenied = 9

Const adFieldIntegrityViolation = 10

Const adFieldSchemaViolation = 11

Const adFieldBadStatus = 12

Const adFieldDefault = 13

Const adFieldIgnore = 15

Const adFieldDoesNotExist = 16

Const adFieldInvalidURL = 17

Const adFieldResourceLocked = 18

Const adFieldResourceExists = 19

Const adFieldCannotComplete = 20

Const adFieldVolumeNotFound = 21

Const adFieldOutOfSpace = 22

Const adFieldCannotDeleteSource = 23

Const adFieldReadOnly = 24

Const adFieldResourceOutOfScope = 25

Const adFieldAlreadyExists = 26

Const adFieldPendingInsert = &H10000

Const adFieldPendingDelete = &H20000

Const adFieldPendingChange = &H40000

Const adFieldPendingUnknown = &H80000

Const adFieldPendingUnknownDelete = &H100000

'---- SeekEnum Values ----

Const adSeekFirstEQ = &H1

Const adSeekLastEQ = &H2

Const adSeekAfterEQ = &H4

Const adSeekAfter = &H8

Const adSeekBeforeEQ = &H10

Const adSeekBefore = &H20

'---- ADCPROP_UPDATECRITERIA_ENUM Values ----

Const adCriteriaKey = 0

Const adCriteriaAllCols = 1

Const adCriteriaUpdCols = 2

Const adCriteriaTimeStamp = 3

'---- ADCPROP_ASYNCTHREADPRIORITY_ENUM Values ----

Const adPriorityLowest = 1

Const adPriorityBelowNormal = 2

Const adPriorityNormal = 3

Const adPriorityAboveNormal = 4

Const adPriorityHighest = 5

'---- ADCPROP_AUTORECALC_ENUM Values ----

Const adRecalcUpFront = 0

Const adRecalcAlways = 1

'---- ADCPROP_UPDATERESYNC_ENUM Values ----

'---- ADCPROP_UPDATERESYNC_ENUM Values ----

'---- MoveRecordOptionsEnum Values ----

Const adMoveUnspecified = -1

Const adMoveOverWrite = 1

Const adMoveDontUpdateLinks = 2

Const adMoveAllowEmulation = 4

'---- CopyRecordOptionsEnum Values ----

Const adCopyUnspecified = -1

Const adCopyOverWrite = 1

Const adCopyAllowEmulation = 4

Const adCopyNonRecursive = 2

'---- StreamTypeEnum Values ----

Const adTypeBinary = 1

Const adTypeText = 2

'---- LineSeparatorEnum Values ----

Const adLF = 10

Const adCR = 13

Const adCRLF = -1

'---- StreamOpenOptionsEnum Values ----

Const adOpenStreamUnspecified = -1

Const adOpenStreamAsync = 1

Const adOpenStreamFromRecord = 4

'---- StreamWriteEnum Values ----

Const adWriteChar = 0

Const adWriteLine = 1

'---- SaveOptionsEnum Values ----

Const adSaveCreateNotExist = 1

Const adSaveCreateOverWrite = 2

'---- FieldEnum Values ----

Const adDefaultStream = -1

Const adRecordURL = -2

'---- StreamReadEnum Values ----

```
Const adReadAll = -1
Const adReadLine = -2
```

```
'---- RecordTypeEnum Values ----
```

```
Const adSimpleRecord = 0
Const adCollectionRecord = 1
Const adStructDoc = 2
```

```
%>
```


CONCLUSION

I have used ASP technology in order to accomplish this project. The most important aspect of ASP is database management.. All the information and transactions of the member customers have been saved to a database for later processes and references. Also this project guided me to improved my scripting and HTML knowledge.

While designing web interfaces with third party programs such as FrontPage and Dreamweaver that necessarily do not need programming background, but integrating ASP to the HTML codes requires a scripting and background knowledge that leaded me to improve my scripting knowledge in web programming.

The most important reason that ASP appealed me is that it is a key to the future while Internet is spreading in every segment of life and millions of people are getting online every day.

In this project, I have established the the fundamentals of ASP and I will be happy to use it in my professional life.