

# Mucitler Grubu

CIS 200

Lefkoşa  
2007



62 55 79 04 67

NEU

# **NEAR EAST UNIVERSITY**

**FACULTY OF ECONOMICS AND  
ADMINISTRATIVE SCIENCES**

**DEPARTMENT OF COMPUTER  
INFORMATION SYSTEMS**

**2006/2007 FALL TERM  
CIS 200  
(Graduation Project)**

**A Group of Inventors**

**SUBMITTED BY: UĞUR ERSAN  
ST. NUMBER: 20040505**

**Lefkoşa  
2007**

# CONTENTS

1. ACKNOWLEDGEMENTS .....	3
2. ABSTRACT .....	3
3. INTRODUCTION .....	3
4. DESIGN OF THE SYSTEM	
• Explanation .....	4
• Database Design .....	5
5. USER MANUAL	
• User Guidelines .....	6
• User Flow Charts .....	7-13
6. REFERENCES .....	14
APPENDIX I	
• Screen Outputs .....	15-16
APPENDIX II	
• Source Code .....	17-75

## ACKNOWLEDGEMENTS

So thanks to my teachers; Dr. Mustafa Menekay, Dr. Nadire Çavuş and Ümit İlhan and especially thanks to my mom and dad about their contribute.

## ABSTRACT

I observed to many web sites, these web sites are using only html coding language. This coding don't allow to manage your web site by using web pages. Old system, I mean not internet programming, I think it is boring. Because we have to use file transfer protocol to update our web site. In new system (ASP, internet programming) is using ftp at once time then we are using interactive ASP language to update, delete, and our web pages. Here is, I'm going to talk about, How do we create asp web pages?

## INTRODUCTION

Simply you must have a standart desktop computer or laptop. Our computers must have above the 533 Mhz. CPU, above the 256 Mb. RAM and 100 Mb. Free disk space. This is the recomended hardware.

On the other side, you must have Windows' operating system like a Windows XP Professional. You must have the internet web browser to run your asp application like an internet explorer 7, Firefox or Opera 9. You have to install local host web server to execute your asp web coding. I'm advising to you, you can install IIS (internet information services) or Baby Web Server. This is the recomended software.

If we want to enter some data, we have to login by admin page. In admin page menaging datas, guests are watching your changing on guest area. We can find these questions' answers:

- How do we create any object under a known subjects?
- How do we edit any object?
- How do we delete any object?
- How do we find any created object?
- How do we edit a subject title?
- How do we insert a picture to any object?

## DESIGN OF THE SYSTEM

### Explanation:

I'm using admin panel when I want to producing outputs. Admin panel is protecting by password and user id. I'm opening the admin panel when I enter the password and user id correctly. And then all opportunities under my control. Admin panel is including useful options. Every happens are coming true by myself when I want it. Every changing is reflecting to guest space. Here is ASP is allowing to us these specifinc happens. I think, you have a question. What is the ASP ? I 'm answering :

**Active Server Pages (ASP)** is Microsoft's server-side script engine for dynamically-generated web pages. It is marketed as an add-on to Internet Information Services (IIS). Programming ASP websites is made easier by various built-in objects. Each object corresponds to a group of frequently-used functionality useful for creating dynamic web pages. In ASP 2.0 there are six such built-in objects: Application, ASPError, Request, Response, Server, and Session. Session, for example, is a cookie-based session object that maintains variables from page to page.

Most ASP pages are written in VBScript, but any other Active Scripting engine can be selected instead by using the @Language directive or the <script language="language" runat="server"> syntax. JScript (Microsoft's implementation of ECMAScript) is the other language that is usually available. PerlScript (a derivative of Perl) and others are available as third-party installable Active Scripting engines.

InstantASP and ChiliASP are technologies that run ASP without Windows Operating System. There are large open source communities on the WWW, such as ASPNuke, which produce ASP scripts, components and applications to be used for free under certain license terms.

# Database Design:

Database Name: **mg.mdb**

## Tables

<b>dokuman</b>			<b>katolog</b>		
Field Name	Data Type	Size	Field Name	Data Type	Size
d_id	Autonumber	Long Int.	k_id	Autonumber	Long Int.
d_baslik	Text	20	k_konu	Text	10
d_dokuman	Memo				
d_tarih	Date/time				
d_ekleyen	Text	10			
d_konu_id	Number	Long Int.			
d_resim	Text	20			

<b>mesajlar</b>			<b>yonet</b>		
Field Name	Data Type	Size	Field Name	Data Type	Size
m_id	Autonumber	Long Int.	yid	Autonumber	Long. Int.
m_konu	Text	15	yonetici	Text	8
m_icerik	Text	255	yifresi	Text	8
m_tarih	Date/time				
m_email	Text	30			
m_gonderen	Text	30			

# USER MANUAL

## User Guidelines :

### On Main Page

**Ana Sayfa :** *Click here to see the added last five documents.*

**Mucitler :** *Click here to see Inventors.*

**Kaşifler :** *Click here to see Explorers.*

**İcatlar :** *Click here to see Inventions.*

**Keşifler:** *Click here to see Discoveries.*

**Sözlük :** *Click here to see the Dictionary.*

**Hakkımda:** *Click here to see about myself.*

**İletişim :** *Click here to sent a message to administrators.*

**Ara/Bul :** *Click here to search and find any word in database.*

**Yönetim:** *Click here to administrator panel.*

### Administrator Panel

**Kayıt Ekle :** *Click here to add a new document under the specific subject.*

**Kayıt Düzenle/Sil :** *Click here to edit and delete a specific dokument.*


**Menü Düzenle :** *Click here to edit Menu Subjects.*

**Şifre Değiştir :** *Click here to change password and user id and add a new admin.*


**Mesaj Kutusu:** *Click here to read or delete message ( coming from guests).*

## User Flow Charts :


# Entering the Administrator Panel

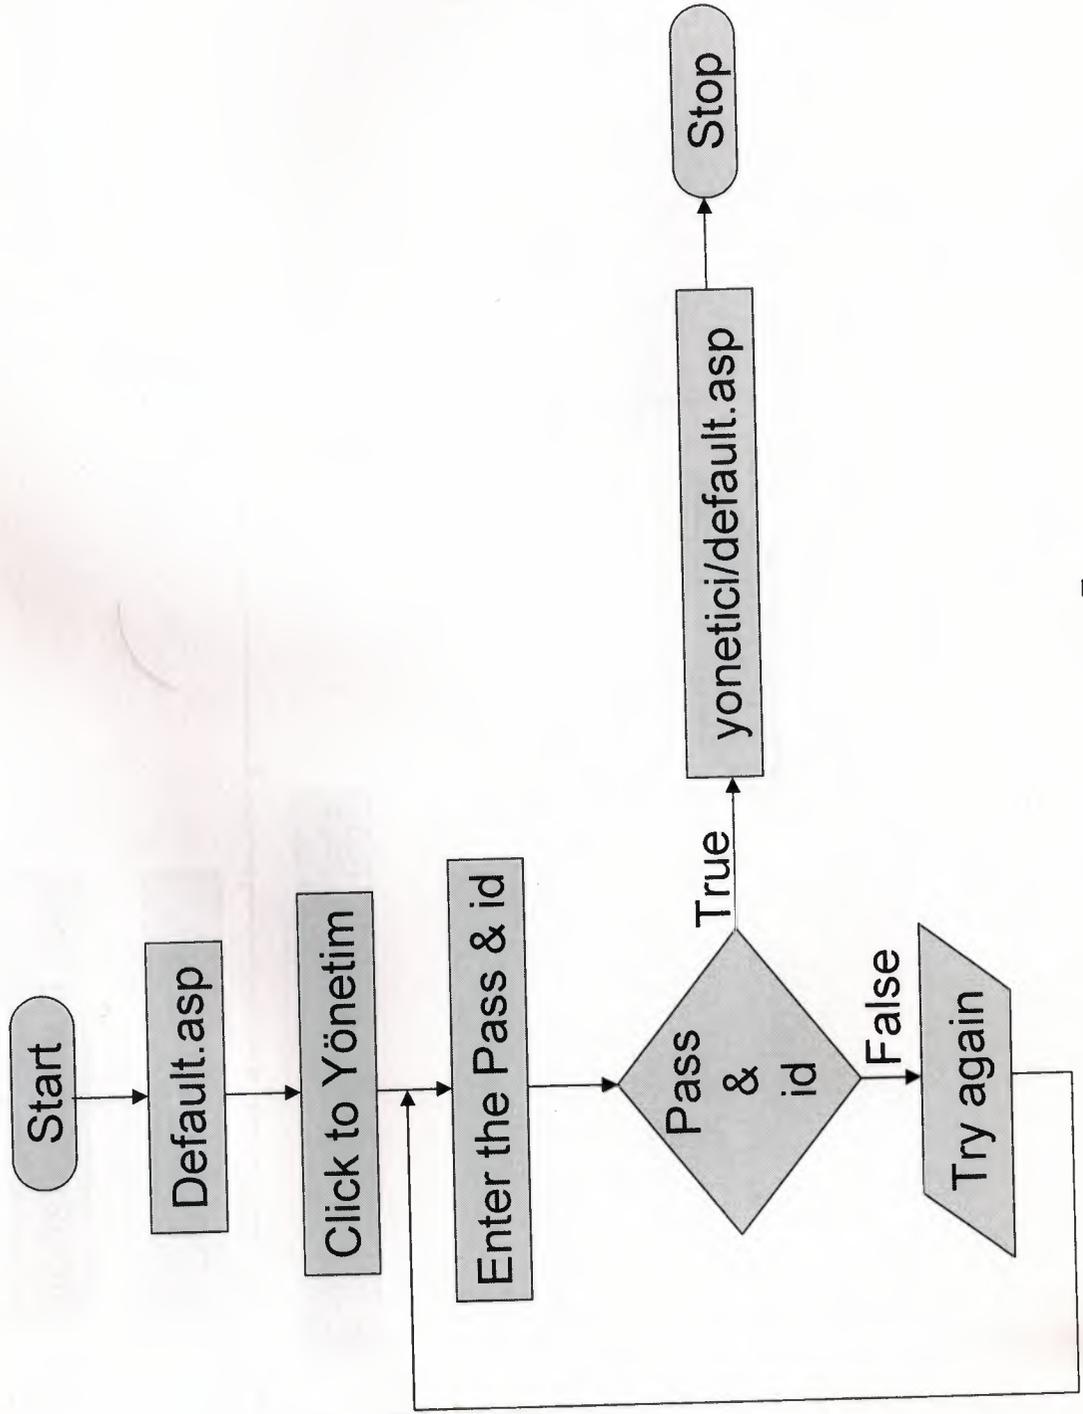


# Adding a New Document

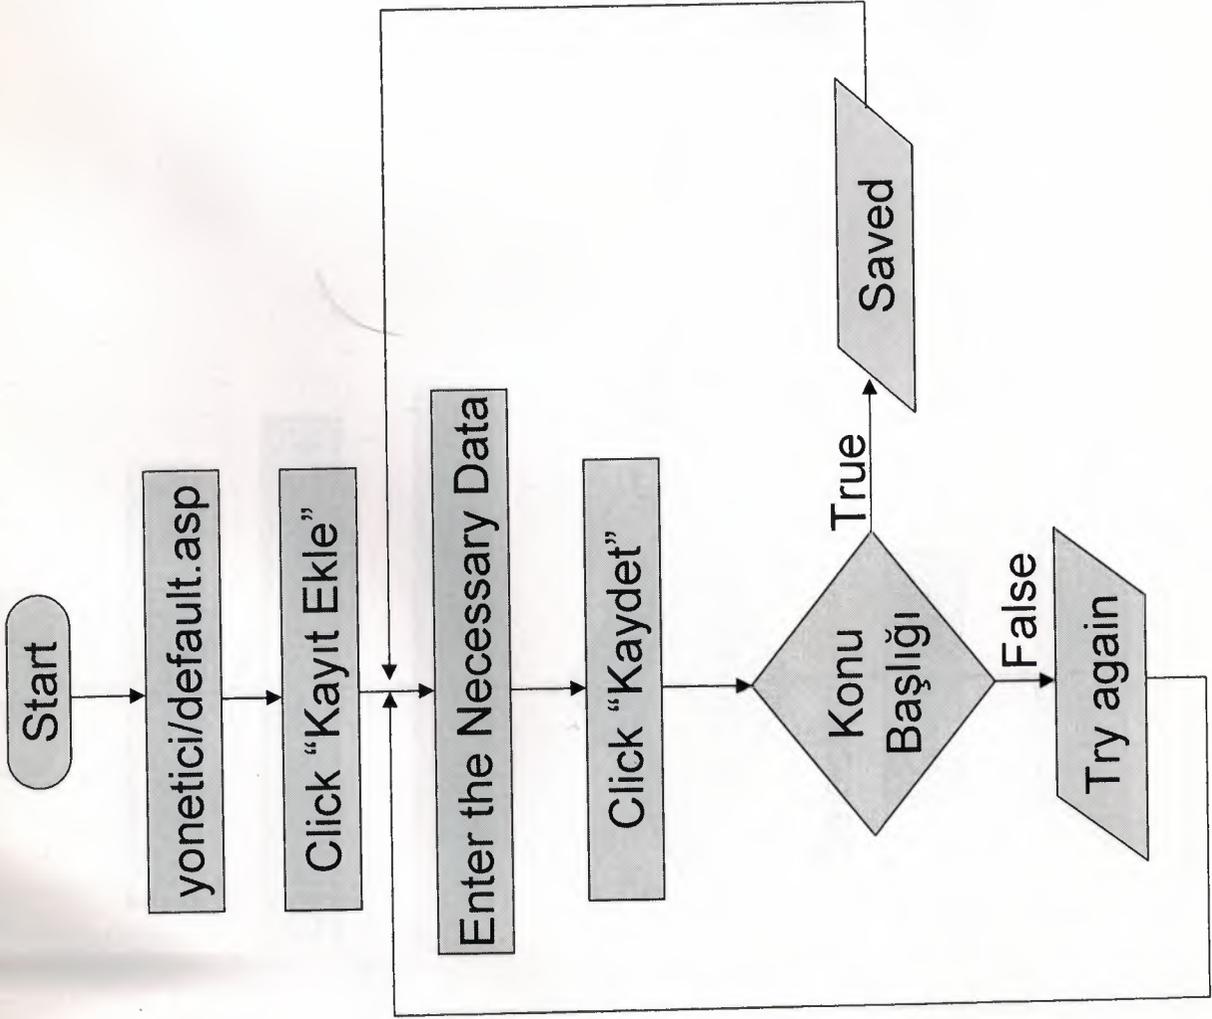


# Editing and deleting Document

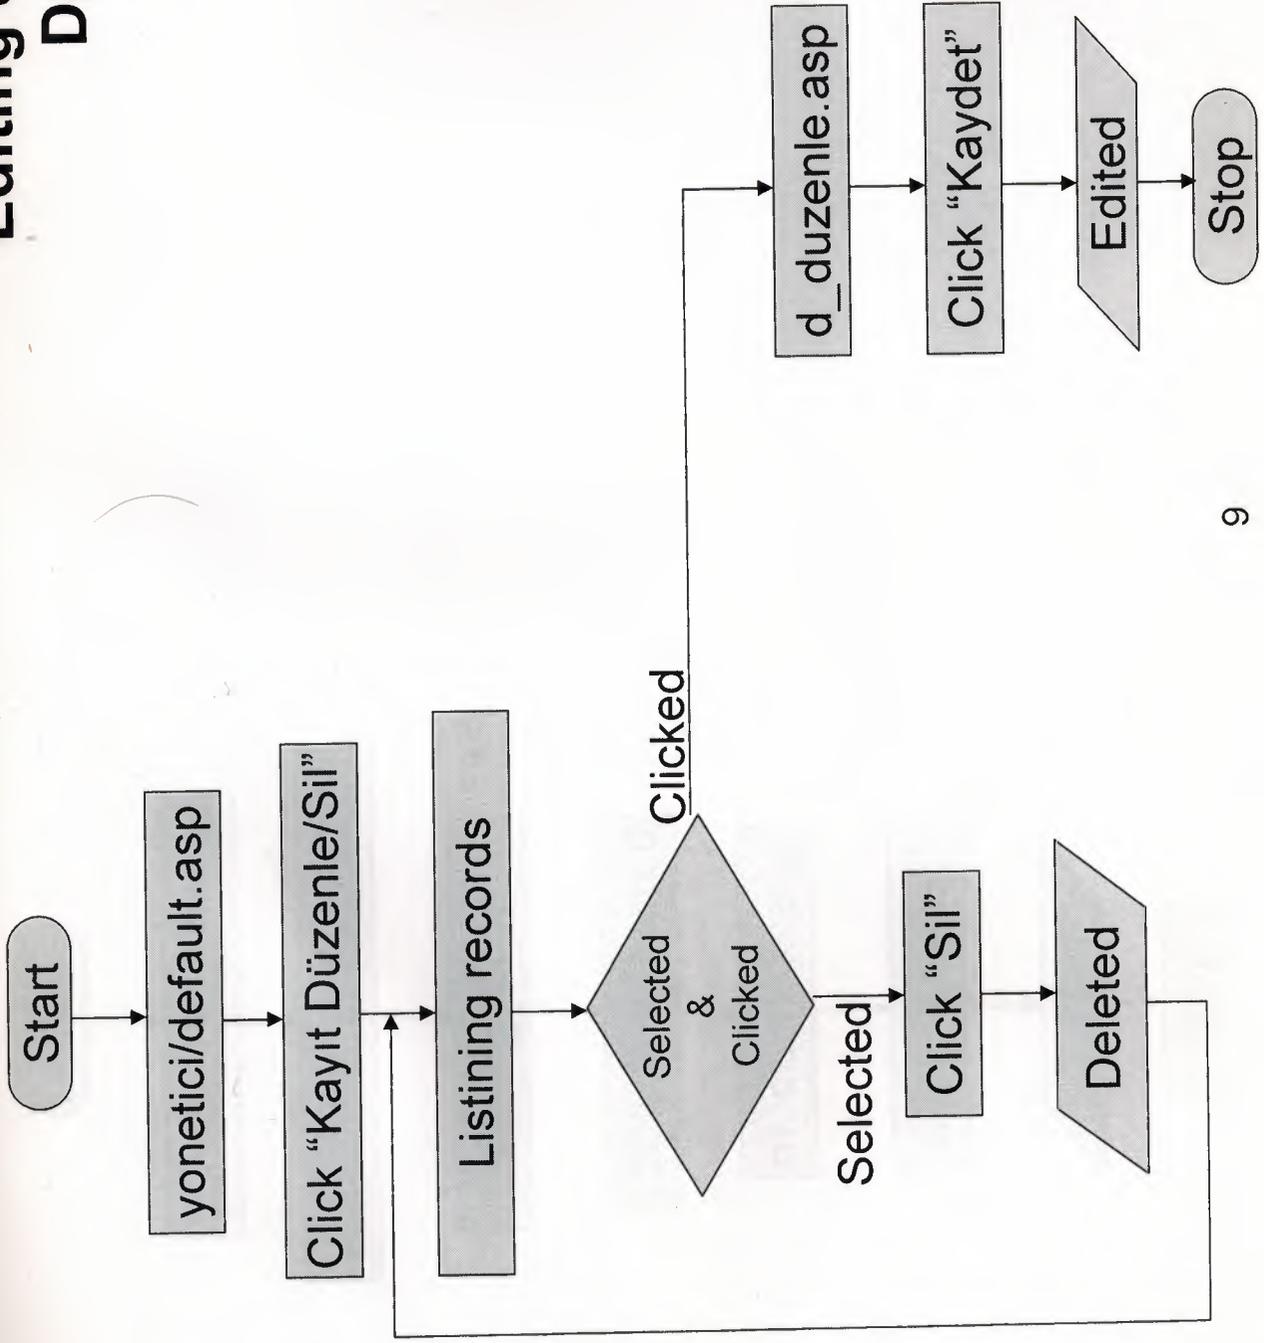


# Editing Menu Name

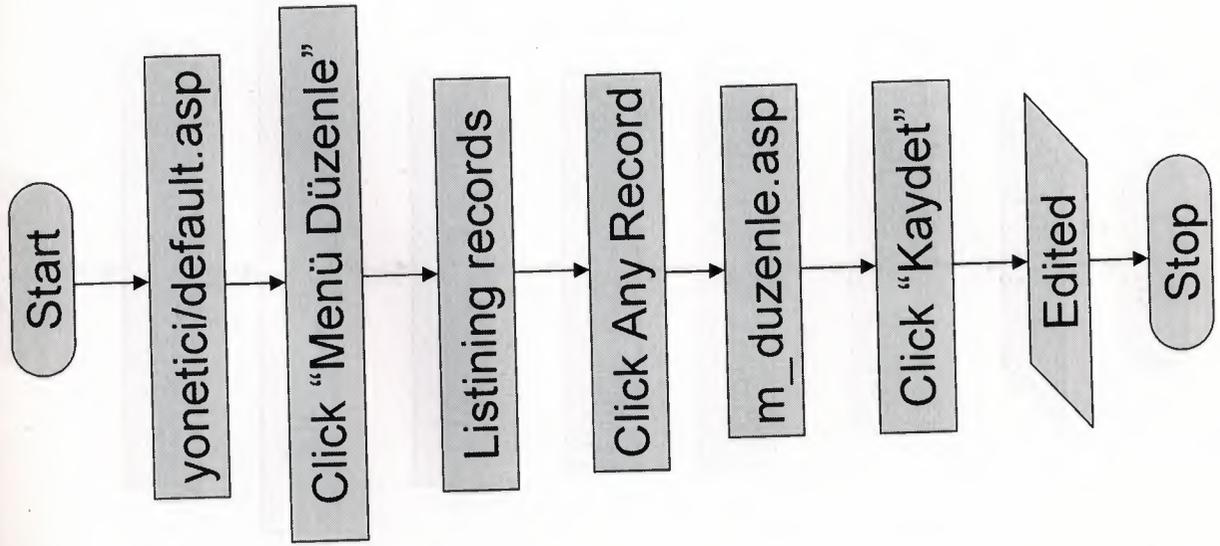


# Change the user id & password

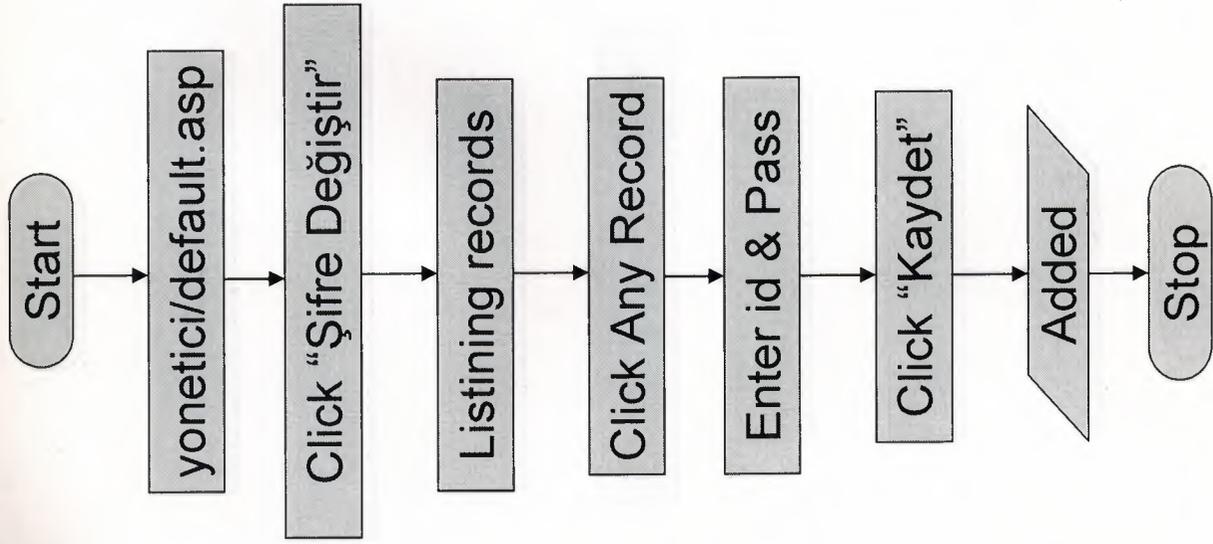

# Adding new Administrator

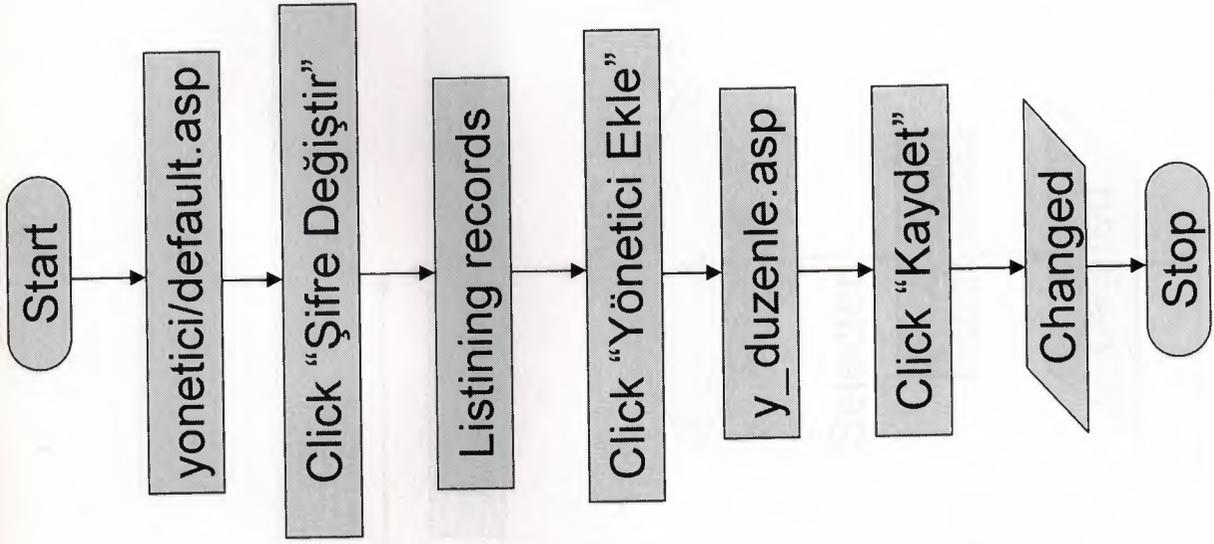

# Read & Delete Messages

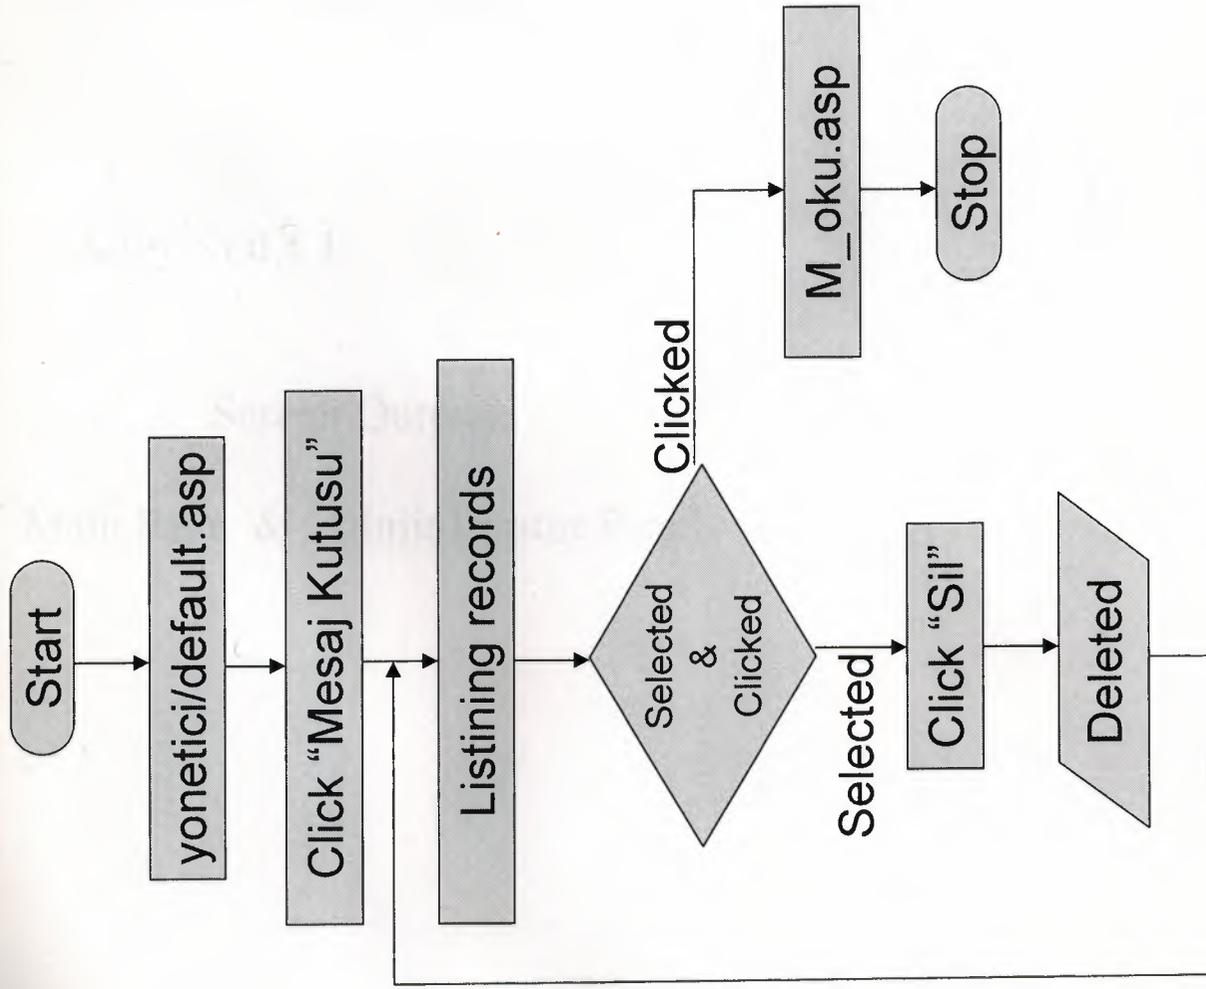

## REFERENCES

Course Notes (“ Ümit İlhan ‘s notes ”)

[www.ilcx.com](http://www.ilcx.com)

[www.kimkimdir.gen.tr](http://www.kimkimdir.gen.tr)

[www.wikipedia.org](http://www.wikipedia.org)

[www.w3schools.com](http://www.w3schools.com)

## APPENDIX I

### Screen Outputs


#### Main Page & Administrator Panel



# MUCİTLER GRUBU

Hiç kimin okumadığı kitabın...

## Güney Kutbu



## Kategori 4

Güney Kutbu, Dünya ekseninin alt kısmında (Güney ucunda) kalan noktayı tanımlar. "Güneydeki efsanevi kıta"nın bulunması 200 yıllık bir arayıştan sonra, ancak 1840'ta başarıyla son...

## Etkileyen Yönetici

Etklenme Tarihi: 18.06.2007 09:30:28

Devamı...

## Einstein Albert



## Kategori 1

Einstein, Albert, Alman asıllı, Amerika'lı fizik bilgini. (Ünvan 1879-Princeton 1955) yılları arasında yaşayan ünlü bilim. Yahudi asıllı bir ailenin çocuğu olarak Almanya'da dünyaya geldi ...

## Etkileyen Yönetici

Etklenme Tarihi: 18.06.2007 09:30:06

Devamı...

## Vasco da Gama



## Kategori 2

Vasco da Gama (okunmuş Vasco dö Gama) (1469, Portekiz - ö. 24 Aralık 1524



Yöneticim Hoşgeldin

Mucitler Grubu | Yönetici Paneli |

Oturumu Kapat

Görev			Açıklama
	Kayıt Ekle		İlgili menüye kayıt ekle
	Kayıt Düzenle / Sil		İlgili menüdeki kayıtları düzenle veya sil
	Menü Düzenle		Menüde ki köprü isimlerini değiştir
	Yönetici		Açıklama
	Şifre değiştir		Sisteme giriş şifresini değiştir
			Kullanıcı isminide değiştirebilirsiniz
	Mesaj kutusu		Ziyaretçilerden gelen mesajlar



Siteye dön

## APPENDIX II

### Source Code

#### Ayar.asp

---

```
<%  
veritabani = Server.MapPath("mg.mdb")  
  
Set Connection = Server.CreateObject("ADODB.Connection")  
Connection.Open "DRIVER={Microsoft Access Driver (*.mdb)}; DBQ=" & veritabani  
%>
```

---

#### Default.asp

---

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1254"%>  
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Frameset//EN"  
"http://www.w3.org/TR/html4/frameset.dtd">  
<html>  
<head>  
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">  
<meta http-equiv="Page-Enter" content="revealTrans(Duration=3.0,Transition=2)">  
<META http-equiv="Page-Exit"  
CONTENT="progid:DXImageTransform.Microsoft.Slide(Duration=2.500,slidestyle='HIDE')"  
> />  
<title> ..... MUCiTLER GRUBU ..... </title>  
<bgsound src="resims/asturias.mp3" loop="-1" volume="50">  
</head>  
  
<frameset rows="100,*" cols="*" frameborder="no" border="0" framespacing="0">  
<frame src="ustfrm.asp" name="ustfrm" scrolling="No" noresize="noresize" id="topFrame"  
title="baner">  
<frameset rows="*" cols="140,*" framespacing="0" frameborder="no" border="0">  
<frame src="solfrm.asp" name="solfrm" scrolling="No" noresize="noresize"  
id="leftFrame" title="menu">  
<frame src="sagfrm.asp" name="sagfrm" id="degis" title="vizyon">  
</frameset>  
</frameset>  
</frameset>  
<noframes>  
<body>  
</body>  
</noframes>  
</html>
```

---



```

=kayit("d_tarih") %></strong></td>
      </tr>
      <tr>
        <td></td>
        <td width="10"></td>
        <td width="63"></td>
      </tr>
    </table><% end if %></td>
  </tr>
</table>
</td>
</tr>
<%kayit.close
set kayit=nothing%> </table>
</body>
</html>

```

---

## Goster.asp

---

```

<% LANGUAGE="VBSCRIPT" %>
<!-- #include file="ayar.asp" -->
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
<title>Goster</title>
<link href="sitol.css" rel="stylesheet" type="text/css" />
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-9" />
<style type="text/css">
<!--
.style1 {color: #99CC33}
-->
</style>
</head>

<body class="arka_sag_c">
<table align="center">
  <tr>
    <td width="559" height="212" align="center" valign="top"><table width="86%"
height="199" border="0" cellpadding="0" cellspacing="3">
      <tr>
        <td width="100%" height="155" valign="top">
          <% if (not Isnumeric(request.QueryString("id"))) then %>
            <% = "Lütfen geçerli bir ID numarasy giriniz." %>
          <% else %>
            <% Set kayit = Server.CreateObject("ADODB.RecordSet")
konu = "Select * FROM dokuman WHERE d_konu_id=" & request.QueryString("id") & "
order by d_id desc"
kayit.open konu,Connection,3,3

```

```

if kayit.recordcount < 1 then %>
<p align="center" class="yazi_alanim">
<%
response.write("Katogoride Hiç Kayıt yok") %>
</p>
<%
else
sayfa = Request.QueryString("sayfa")
If sayfa="" Then sayfa=1
kayit.pagesize = 3
kayit.absolutepage = sayfa
sayfa_sayisi = kayit.pagecount
for i=1 to kayit.pagesize
if kayit.eof then
exit for
end if
end if
%>





```

```
<td width="94" align="right" bgcolor="#336699"><p align="center" > <a  
href="<% ="goster2.asp?id=" & kayit("d_id") %>" > <strong>Devamı...</strong></a>  
</p></td>
```

```
<td width="7" bgcolor="#336699">&nbsp;</td>
```

```
</tr>
```

```
</table></td>
```

```
</tr>
```

```
<tr>
```

```
<td height="1"></td>
```

```
<td width="1"></td>
```

```
<td width="1"></td>
```

```
</tr>
```

```
</table>
```

```
<br />
```

```
<%
```

```
kayit.movenext
```

```
Next
```

```
%>
```

```
<%
```

```
end if
```

```
%> </td>
```

```
</tr>
```

```
<tr>
```

```
<td height="35" align="center" valign="middle"><strong>
```

```
<%
```

```
onceki = cint(sayfa) - 1
```

```
sonraki = cint(sayfa) + 1
```

```
%>
```

```
<%
```

```
if onceki < 1 then
```

```
response.write ""
```

```
else
```

```
response.write "&nbsp;<a href=goster.asp?sayfa=" & onceki & "&id=" &
```

```
request.QueryString("id") & ">Önceki</a>"
```

```
end if
```

```
%>
```

```
&nbsp;  
```

```
<%
```

```
for g = 1 to sayfa_sayisi
```

```
if g = cint(sayfa) then
```

```
response.write "["
```

```
response.write g & "]"
```

```
%>
```

```
<% else
```

```
response.write "<a href=goster.asp?sayfa=" & g & "&id=" & request.QueryString("id") &
```

```
">" & g & "</a> "
```

```
end if
```

```
next %>
```

```
&nbsp;  
```

```
<%
```

```

if sonraki > sayfa_sayisi then
response.write ""
else
response.write "<a href=goster.asp?sayfa=" & sonraki & "&id=" & request.QueryString("id")
& ">Sonraki</a>"
end if
%>
    <%kayit.close
set kayit=nothing%>
    </strong></td>
    </tr>
</table></td>
</tr>

</table>
<%
end if
%>
</body>
</html>

```

---

## Hakkimda.asp

---

```

<%@LANGUAGE="VBSCRIPT" CODEPAGE="1254"%>
<html xmlns="http://www.w3.org/1999/xhtml">
<head>

<title>Hakkımda</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-9">
<link href="sitol.css" rel="stylesheet" type="text/css">
<style type="text/css">
<!--
.style1 {
            font-size: 28px;
            font-weight: bold;
        }
.style2 {font-size: 22px}
.style3 {font-size: 20px}
.style5 {font-size: 18px}
-->
</style>
</head>

<body class="arka_sag">
<table width="788" align="center">
<tr>
<td width="386"></td>
<td width="390">

```

```

<table width="370">
  <tr>
    <td width="360"><div align="center" class="style1">NEAR EAST UNIVERSITY
  </div></td>
  </tr>
  <tr>
    <td>&nbsp;</td>
  </tr>
  <tr>
    <td><div align="center" class="style2">FACULTY OF ECONOMIC AND </div></td>
  </tr>
  <tr>
    <td><div align="center" class="style2">ADMINISTRATIVE SCIENCES </div></td>
  </tr>
  <tr>
    <td>&nbsp;</td>
  </tr>
  <tr>
    <td><div align="center" class="style3">COMPUTER INFORMATION
SYSTEM</div></td>
  </tr>
  <tr>
    <td height="23">&nbsp;</td>
  </tr>
  <tr>
    <td><div align="center"><span class="style5">CIS 200 </span></div></td>
  </tr>
  <tr>
    <td><div align="center"><span class="style5">GRADUATION PROJECT
</span></div></td>
  </tr>
  <tr>
    <td>&nbsp;</td>
  </tr>
  <tr>
    <td><div align="center"><strong>UĞUR ERSAN </strong></div></td>
  </tr>
  <tr>
    <td><div align="center"><strong>20040505</strong></div></td>
  </tr>
  <tr>
    <td>&nbsp;&nbsp;&nbsp;</td>
  </tr>
  <tr>
    <td><div align="center"><strong>SPRING 2007</strong></div></td>
  </tr>
</table></td></tr></table>
</body>
</html>

```

---

# İletisim.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1254"%>
<!--#include file="ayar.asp" -->
<html>
<head>
<title>İletişim</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-9">
<link href="sitol.css" rel="stylesheet" type="text/css">
<style type="text/css">
<!--
.style1 {
            font-size: 16px;
            font-weight: bold;
        }
.style2 {font-size: 24px}
-->
</style>
</head>
<body class="arka_sag">
<table align="center">
<tr>
            <td><P class="style1" ><span class="style2">YÖNETİCİLERE
MESAJINIZI İLETİN !!!</span> </P></td>
</tr>
</table><br>

<table width="518" align="center">
<form id="form" name="form" method="post" action="iletisim.asp?durum=1">
<%
dim uyarı
Set tablon = Server.CreateObject("ADODB.RecordSet")
baglaa = "Select * FROM mesajlar"
tablon.open baglaa,Connection,3,3 %>
<% if request.QueryString("durum")="1" and request.Form("konu")<>"" then %>
<%
tablon.addnew
tablon("m_konu")=request.form("konu")
tablon("m_icerik")=request.form("icerik")
tablon("m_email")=request.form("email")
tablon("m_gonderen")=request.form("gonderen")
tablon.update
%>
<% uyarı = "Mesajınız gönderilmiştir" %>
<% end if %>
<tr>
            <td width="200" bgcolor="#333399">Gönderen (isim,soyisim)
            </td>
            <td width="306"><input name="gonderen" type="text" id="gonderen" size="50" />
        </td>
</tr>
</table>
```

```

        <tr>
          <td valign="top" align="left" bgcolor="#333399">E-Mail</td>
          <td><input type="text" name="email" id="email" size="50" /></td>
        </tr>

        <tr>
          <td bgcolor="#333399">Konu</td>
          <td><input name="konu" type="text" id="konu" size="50" /></td>
        </tr>

        <tr>
          <td bgcolor="#333399" align="left" valign="top">Konun
İçeriği</td>
          <td><textarea name="icerik" cols="40" rows="10"
id="icerik"></textarea></td>
        </tr>

        <tr>
          <td bgcolor="#333399">Onayla</td>
          <td><input type="submit" name="Submit" value=" Kaydet " />
          <% =uyari %>
        </td>
        </tr>
      </form>
    </table>

  </body>
</html>

```

---

## Sagfrm.asp

---

```

<% LANGUAGE="VBSCRIPT" %>
<!-- #include file="ayar.asp" -->
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
<title>Goster</title>
<link href="sitol.css" rel="stylesheet" type="text/css" />
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-9" />
<style type="text/css">
<!--
.style1 {color: #99CC33}
-->
</style>
</head>

<body class="arka_sag_c">
<table width="409" align="center">

```

```

<tr>
  <td width="401" align="center"><marquee> <font color=navy size=5> En son eklenen 5
  Döküman </font></marquee>
</td>
</tr>
</table>

```

```

<table width="785" align="center">
  <tr>
    <td width="777" height="212" align="center" valign="top">
      <table width="99%" height="199" border="0"
      cellpadding="0" cellspacing="3">
        <tr>
          <td width="100%" height="155" valign="top">
            <% if (not Isnumeric(request.QueryString("id")))
            then %>
              <% = "Lütfen geçerli bir ID numarası giriniz." %>
              <% else %>
                <% Set kayıt = Server.CreateObject("ADODB.RecordSet")
                konu = "Select * FROM dokuman order by d_tarih desc"
                kayıt.open konu,Connection,3,3
                if kayıt.recordcount < 1 then %>
                  <p align="center" class="yazi_alanim">
                    <%
                    response.write("Kategoriye Hiç Kayıt yok") %>
                  </p>
                  <%
                else
                  sayfa = Request.QueryString("sayfa")
                  If sayfa="" Then sayfa=1
                  kayıt.pagesize = 5
                  kayıt.absolutePage = sayfa
                  sayfa_sayisi = kayıt.pagecount
                  for i=1 to kayıt.pagesize
                    if kayıt.eof then
                      exit for
                    end if
                  %>
                  <table width="84%" bgcolor="#336699">
                    <tr>
                      <td width="142" align="left"
                      bgcolor="#336699" class="arka_sag">
                        <strong>
                          <% =kayıt("d_baslik") %></strong>
                        </td>
                      <td width="325" align="left"
                      bgcolor="#336699">&nbsp;&nbsp;&nbsp;</td>
                      <td width="158" align="left"
                      bgcolor="#336699" class="boxText">

```

```

                                <b>&nbsp;Kategori</b><a
href="goster.asp?id=<%=kayit("d_konu_id")%>">&nbsp;<%=kayit("d_konu_id")%></a>
                                </td>
                                </tr>
                                </table>
                                <table width="84%" height="92" cellpadding="0" cellspacing="0" >
                                <tr>
                                <td colspan="3" align="left" valign="top" bgcolor="#000088"
class="yazi_alanim">
                                <% if kayit("d_resim") = "bos"
then %>
                                
                                <% else %>
                                " border="0" width="140" height="135" align="left"
vspace="5">
                                <% end if
%>
                                <% =left(kayit("d_dokuman"),200) & "... " %></td>
                                </tr>
                                <tr>
                                <td height="25" colspan="3" valign="top" >
                                <table width="100%" border="0"
cellpadding="0" cellspacing="0" bgcolor="#666666" >
                                <tr>
                                <td width="161" align="left" bgcolor="#336699">Ekleyen: <strong>
                                <%=kayit("d_ekleyen") %>
                                </strong></td>
                                <td width="321" align="left" bgcolor="#336699">Eklenme Tarihi:<strong>
                                <%=kayit("d_tarih") %>
                                </strong> </td>
                                <td width="94" align="right" bgcolor="#336699"><p align="center" > <a
href="<%= "goster2.asp?id=" & kayit("d_id") %>"> <strong>Devamı...</strong></a>
                                </p></td>
                                </tr>
                                </table></td>
                                </tr>
                                <tr>
                                <td height="1"></td>
                                <td width="59"></td>
                                <td width="1"></td>
                                </tr>
                                </table>
                                <br />
                                <%
kayit.movenext
Next
%>
                                <%

```

```

end if
%>      </td>
      </tr>

      </table></td>
</tr>

</table>
<%
end if
%>
</body>
</html>

```

---

## Solfrm.asp

---

```

<% Language="VBScript" %>
<%
set baglan = server.createObject("ADODB.Connection")
baglan.Open "Driver={Microsoft Access Driver (*.mdb)}; DBQ="
&Server.MapPath("mg.mdb")
%>
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-9">
<title>Menu</title>
<link href="sitol.css" rel="stylesheet" type="text/css">
</head>

<body class="arka_sol">
<table width="129" align="left" cellpadding="0" cellspacing="0" id="tablo">
<tr><th width="127" class="tablomText"><a href="sagfrm.asp" target="sagfrm">Ana Sayfa</a></th>
</tr>
<% tablom = "Select * from katalog"
   set kayit=baglan.execute(tablom)
   while not kayit.eof %>
<tr><th class="tablomText"><a href="<% ="goster.asp?id=" & kayit("k_id") %>" target="sagfrm">
<% response.write(kayit.fields("k_konu")) %></a>
</th></tr>
<%
kayit.movenext
wend %>

```

```

<tr><th class="tablomText"><a
href="hakkimda.asp" target="sagfrm">Hakkımda</a></th>
<tr><th class="tablomText"><a
href="iletisim.asp" target="sagfrm">İletişim</a></th>
<tr><th class="tablomText"><a
href="ara.asp" target="sagfrm">Ara / Bul</a></th>
<tr><th class="tablomText"><a
href="yonetici/default.asp" target="_parent">Yönetim</a></th>
</table>
<%
kayit.close
set kayit=nothing
baglan.close
set baglan=nothing
%>
</body>
</html>

```

---

## Ustfrm.asp

---

```

<% Language="VBScript" %>
<%
set baglan = server.createObject("ADODB.Connection")
baglan.Open "Driver={Microsoft Access Driver (*.mdb)}; DBQ="
&Server.MapPath("mg.mdb")
%>
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-9">
<title>Menu</title>
<link href="sitol.css" rel="stylesheet" type="text/css">
</head>

<body class="arka_sol">
<table width="129" align="left" cellpadding="0" cellspacing="0" id="tablo">
<tr><th width="127" class="tablomText"><a href="sagfrm.asp" target="sagfrm">Ana Sayfa</a></th>
</tr>
<% tablom = "Select * from katolog"
set kayit=baglan.execute(tablom)
while not kayit.eof %>
<tr><th class="tablomText"><a href="<% ="goster.asp?id=" & kayit("k_id") %>" target="sagfrm">
<% response.write(kayit.fields("k_konu")) %></a>
</th></tr>
<%

```

```

kayit.movenext
wend %>
<tr><th class="tablomText"><a
href="hakkimda.asp" target="sagfrm">Hakkimda</a></th>
<tr><th class="tablomText"><a
href="iletisim.asp" target="sagfrm">İletişim</a></th>
<tr><th class="tablomText"><a
href="ara.asp" target="sagfrm">Ara / Bul</a></th>
<tr><th class="tablomText"><a
href="yonetici/default.asp" target="_parent">Yönetim</a></th>
</table>
<%
kayit.close
set kayit=nothing
baglan.close
set baglan=nothing
%>
</body>
</html>

```

## Ara.asp

```

<% Language="VBScript" %>
<%
set baglan = server.createObject("ADODB.Connection")
baglan.Open "Driver={Microsoft Access Driver (*.mdb)}; DBQ="
&Server.MapPath("mg.mdb")
%>
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-9">
<title>Menu</title>
<link href="sitil.css" rel="stylesheet" type="text/css">
</head>

<body class="arka_sol">
<table width="129" align="left" cellpadding="0" cellspacing="0" id="tablo">
<tr><th width="127" class="tablomText"><a href="sagfrm.asp" target="sagfrm">Ana Sayfa</a></th>
</tr>
<% tablom = "Select * from katalog"
set kayit=baglan.execute(tablom)
while not kayit.eof %>
<tr><th class="tablomText"><a href="goster.asp?id=" & kayit("k_id") %>" target="sagfrm">
<% response.write(kayit.fields("k_konu")) %></a>

```

```

</th></tr>
<%
kayit.movenext
wend %>
<tr><th class="tablomText"><a
href="hakkimda.asp" target="sagfrm">Hakkimda</a></th>
<tr><th class="tablomText"><a
href="iletisim.asp" target="sagfrm">İletişim</a></th>
<tr><th class="tablomText"><a
href="ara.asp" target="sagfrm">Ara / Bul</a></th>
<tr><th class="tablomText"><a
href="yonetici/default.asp" target="_parent">Yönetim</a></th>
</table>
<%
kayit.close
set kayit=nothing
baglan.close
set baglan=nothing
%>
</body>
</html>

```

---

## Sonuc.asp

---

```

<%@LANGUAGE="VBSCRIPT" CODEPAGE="1254"%>
<html xmlns="http://www.w3.org/1999/xhtml">
<head>

<title>Arama Sonuçları</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-9">
<link href="sitol.css" rel="stylesheet" type="text/css">
</head>

<body class="arka_sag_c">
<%
Set bagla = Server.CreateObject("ADODB.Connection")
bagla.Open "Driver={Microsoft Access Driver (*.mdb)}; DBQ=" &
Server.MapPath("mg.mdb")
aratip = request.queryString("tip")
isim = request.querystring("isim")
set konuu = Server.CreateObject("ADODB.Recordset")
if aratip = ("a_baslik") then
sorgu = "select * from dokuman where d_baslik like '%" & isim & "%' order by d_baslik"
konuu.open sorgu,bagla,1,3
else
sorgu = "select * from dokuman where d_dokuman like '%" & isim & "%' order by d_baslik"
konuu.open sorgu,bagla,1,3
end if

```

```

sonucsayisi = konu.RecordCount
if isim="" Then %>
<INPUT TYPE="button" VALUE="<< Geri, | Hiç bir şey yazmadan arama yapılır mı hiç :) |"
onClick="history.go(-1)">
<%
response.end
end if
if konu.eof then %>
<p align="left"><INPUT TYPE="button" VALUE="<< Geri, | Hiç kayıt bulunamadı |"
onClick="history.go(-1)">
<%
response.end
else %>
<br><br>
<table width="412">
<tr>
<td width="79" bgcolor="#333399"
class="goster_tablo">Başlık</td>
<td width="125" bgcolor="#333399"
class="goster_tablo">İçerik</td>
<td width="125" bgcolor="#333399"
class="goster_tablo">Ekleyen</td>
<td width="182" bgcolor="#333399"
class="goster_tablo">Eklenme Tarihi</td>
</tr>
<% do while not konu.eof %>
<tr>
<td bgcolor="#336699"><b>>> </b><a
href="<% ="goster2.asp?id=" & konu("d_id") %>" target="sagfrm">
<% =konu("d_baslik") %></a></td>
<td bgcolor="#336699"><%
=left(konu("d_dokuman"),20) %></td>
<td bgcolor="#336699"><%
=konu("d_ekleyen") %></td>
<td bgcolor="#336699"><% =konu("d_tarih")
%></td>
</tr>
<%
konuu.movenext
loop
end if %>
</table>
</center>
<p align="left"><INPUT TYPE="button" VALUE=" << Geri " onClick="history.go(-
1)"></p>
</body>
</html>

```

# Administrator Panel

## Ayar.asp

```
<%  
veritabani = Server.MapPath("../mg.mdb")  
  
Set Connection = Server.CreateObject("ADODB.Connection")  
Connection.Open "DRIVER={Microsoft Access Driver (*.mdb)}; DBQ=" & veritabani  
%>
```

## D\_ara.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1254"%>  
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"  
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">  
<html xmlns="http://www.w3.org/1999/xhtml">  
<head>  
<title>Ara ki Bulasın</title>  
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-9" />  
  
<link href="sitils.css" rel="stylesheet" type="text/css" />  
</head>  
  
<body class="arka_sag"><table align="center" width="838" border="1">  
<tr>  
<td width="243">&nbsp;&nbsp;&nbsp;&nbsp;<span><strong>Yöneticim Hoşgeldin  
</strong></span></td>  
<td width="327"><div align="center">| Mucitler Grubu | Yönetici Paneli |</div></td>  
<td width="246"><div align="right"><a href="giris.asp?oturum=kapat"><strong>Oturumu  
Kapat</strong></a>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</div></td>  
</tr>  
</table>  
<br /><br />  
<p><h3 align="center">Aranacak kelimeyi aşağıya yazınız</h3>  
</p>  
<form method="get" action="d_sonuc.asp">  
<table align="center" width="191">  
<tr>  
<td width="181" align="center"><input type="text" name="isim" size="30"></td>  
</tr>  
<tr>  
<td bgcolor="#5A5A5A" ><input name="tip" type="radio" value="a_baslik" />Konu  
başlıklarında ara</td>  
</tr>  
<tr>
```

```

<td bgcolor="#5A5A5A" ><input name="tip" type="radio" value="a_dokuman" />Konu
içeriklerinde ara</td>
</tr>
<tr>
<td align="center"><input type="submit" value="B U L" name="submit"></td>
</tr>
</table>
</form>
<table align="center" width="203" border="1">
<tr>
<td width="200" align="center" bgcolor="#545454"><a href="liste_d.asp">Dökümanları
Listele</a></td>
</tr>
<tr>
<td align="center" bgcolor="#545454"><a href="default.asp">Yönetim Paneline Dön</a></td>
</tr>
</table>
</body>
</html>

```

---

## D\_duzenle.asp

```

<%@LANGUAGE="VBSCRIPT" CODEPAGE="1254"%>
<%if not session("basarili")="true" then response.Redirect "giris.asp" %>
<!--#Include file="ayar.asp"-->
<%
    dim kaydet
    dim sira
    dim sira2
    dim uyari

    sira = request.Form("baslik")
    sira2 = request.form("icerik")

    if request.Form("submit")<>"" then
        call SaveRecord()
    End if

    if request.QueryString("id")<>"" then
        call GetRecord()
    End if

Sub SaveRecord()
    Set tablo = Server.CreateObject("ADODB.RecordSet")

    if request.Form("id")="" then

```

```

        sorgu = "Select * From dokuman"
        tablo.open sorgu,Connection,2,3
        tablo.addnew
        tablo.fields("d_baslik") = sira
        tablo.fields("d_dokuman") = sira2

        tablo.update
        uyari = "Veri (ler) kaydedildi"
        kaydet = true
    else
        tablo.open "Select * From dokuman
Where d_id=" & request.Form("id"),connection,2,3
        tablo.fields("d_baslik") = sira
        tablo.fields("d_dokuman") = sira2
        tablo.update
        uyari = "Kayit düzeltildi"
        kaydet = true
    End if

    tablo.close
    set tablo = nothing

End Sub

Sub GetRecord()

    dim tablo
    set tablo = server.CreateObject("Adodb.Recordset")
    sorgu2 = "Select * From dokuman Where d_id=" &
request.QueryString("id")
    tablo.open sorgu2,Connection,2,3
    if not tablo.eof then
        sira = tablo.fields("d_baslik")
        sira2 = tablo.fields("d_dokuman")
    End If
    tablo.close
    set tablo = nothing
    kaydet = false

End Sub

%>
<html>
<head>
<title>Dokuman Düzenleme</title>

```

```
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-9">
<link href="sitils.css" rel="stylesheet" type="text/css">
</head>
```

```
<body>
```

```
<script language="JavaScript1.2">
function clrBar(line,face)
```

```
{
with(document.body.style)
{
scrollbarDarkShadowColor=line;
scrollbar3dLightColor=line;
scrollbarArrowColor="black";
scrollbarBaseColor=face;
scrollbarFaceColor=face;
scrollbarHighlightColor=face;
scrollbarShadowColor=face;
scrollbarTrackColor="#F3F3F3";
}
}
```

```
function setcolor()
```

```
{
var w = document.body.clientWidth;
var h = document.body.clientHeight;
var x = event.clientX;
var y = event.clientY;
if(x>w) clrBar("#c0c0c0","#4b4b4b"); // Colors
of active state
else clrBar("#969696","#646464"); // Colors of
normal state
}
```

```
if (document.all){
clrBar(null,null);
document.onmousemove=setcolor;
}
```

```
</script>
```

```
<table align="center" width="838" border="1">
```

```
<tr>
```

```
<td width="243">&nbsp;&nbsp;&nbsp;<span><strong>Yöneticim Hoşgeldin</strong>
</span></td>
```

```
<td width="327"><div align="center">| Mucitler Grubu | Yönetici Paneli |</div></td>
```

```
<td width="246"><div align="right"><a href="giris.asp?oturum=kapat"><strong>Oturumu
Kapat</strong></a>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</div></td>
```

```
</tr>
```

```
</table>
```

```
<br><br>
```

```
<table align="center">
```

```
<td bgcolor="#5D5D5D">DÖKÜMAN DÜZENLE</td>
```



## D\_ekle.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1254"%>
<%if not session("basarili")="true" then response.Redirect "giris.asp" %>
<!--#include file="ayar.asp" -->
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-9">
<link href="sitils.css" rel="stylesheet" type="text/css">
</head>
<body>
<script language="JavaScript1.2">
function clrBar(line,face)
{
    with(document.body.style)
    {
        scrollbarDarkShadowColor=line;
        scrollbar3dLightColor=line;
        scrollbarArrowColor="black";
        scrollbarBaseColor=face;
        scrollbarFaceColor=face;
        scrollbarHighlightColor=face;
        scrollbarShadowColor=face;
        scrollbarTrackColor="#F3F3F3";
    }
}

function setColor()
{
    var w = document.body.clientWidth;
    var h = document.body.clientHeight;
    var x = event.clientX;
    var y = event.clientY;
    if(x>w) clrBar("#c0c0c0","#4b4b4b");
    else clrBar("#969696","#646464");
}

if (document.all){
clrBar(null,null);
document.onmousemove=setcolor;
}
<!--
function pop(vfile) {
window.open(vfile,"pop","toolbar=0,location=0,directories=0,status=1,menubar=0,scrollbars
=1,resizable=0,width=400,height=75")
}
//-->
</script>
<table align="center" width="838" border="1">
<tr>
<td width="243">&nbsp;&nbsp;&nbsp;<strong>Yöneticim Hoşgeldin </strong></td>
<td width="327"><div align="center">| Mucitler Grubu | Yönetici Paneli |</div></td>
```



```

        </tr>
        <tr>
        <td bgcolor="#030303">Kategori</td>
        <td bgcolor="#2A2A2A"><select
name="kategori" id="kategori">
        <option value="0">Lütfen Seçiniz</option>
        <% Set tablon =
Server.CreateObject("ADODB.RecordSet")
katolog ORDER BY k_konu ASC"
veritabani,Connection,3,3 %>
        <%do while (not tablon.eof)%>
        <option value="<%
=tablon("k_id") %>"><% =tablon("k_konu") %></option>
        <% tablon.movenext
Loop %>
        </select></td>
        </tr>
        <tr>
        <td bgcolor="#030303">Onayla</td>
        <td bgcolor="#2A2A2A"><input
type="submit" name="Submit" value=" Kaydet " /></td>
        </tr>
        </form>
        </table>

<table align="center" width="200" border="1">
<tr>
<td align="center" bgcolor="#545454"><a href="default.asp">Yönetim Paneline Dön</a></td>
</tr>
</table>
</body>
</html>

```

---

## D\_sonuc.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1254"%>
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
<title>Arama Sonuçlari</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-9">
<link href="sitils.css" rel="stylesheet" type="text/css">
</head>
<body class="arka_sag_c">
<table align="center" width="838" border="1">
<tr>
<td width="243">&nbsp;&nbsp;&nbsp;<span><strong>Yöneticim Hoşgeldin
</strong></span></td>
<td width="327"><div align="center">| Mucitler Grubu | Yönetici Paneli |</div></td>
<td width="246"><div align="right"><a href="giris.asp?oturum=kapat"><strong>Oturumu
Kapat</strong></a>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</div></td>
</tr>
</table>
<%
```

```
dim tablom
dim uyari
dim bagla
Set bagla =
```

```
Server.CreateObject("ADODB.Connection")
bagla.Open "Driver={Microsoft Access Driver (*.mdb)}; DBQ=" &
Server.MapPath("../mg.mdb")
```

```
Set tablom =
Server.CreateObject("ADODB.RecordSet")
if request.Form("Submit")="Sil" then
Call Del()
End if
```

```
Sub Del()
```

```
dim sil_sayi
dim i
dim silinen
```

```
sil_sayi = Request.Form("sil_sayi")
```

```
for i = 1 to sil_sayi
id = Request.Form("d" & i)
if id<>"" then
sorgu2 = "Delete From dokuman Where
```

```
d_id=" & id
```

```
tablom.open sorgu2,bagla,3,3
```

```
silinen = silinen + 1
end if
next
uyari = silinen & " Kayıt Silindi"
```

End Sub

```
sorgu2 = "Select * From dokuman"
tablom.open sorgu2,bagla,3,3
%>
```

```
<%
```

```
Set bagla = Server.CreateObject("ADODB.Connection")
```

```
bagla.Open "Driver={Microsoft Access Driver (*.mdb)}; DBQ=" &
```

```
Server.MapPath("../mg.mdb")
```

```
aratip = request.queryString("tip")
```

```
isim = request.querystring("isim")
```

```
set konu = Server.CreateObject("ADODB.Recordset")
```

```
if aratip = ("a_baslik") then
```

```
sorgu = "select * from dokuman where d_baslik like '%" & isim & "%' order by d_baslik"
```

```
konu.open sorgu,bagla,1,3
```

```
else
```

```
sorgu = "select * from dokuman where d_dokuman like '%" & isim & "%' order by d_baslik"
```

```
konu.open sorgu,bagla,1,3
```

```
end if
```

```
sonucsayisi = konu.RecordCount
```

```
if isim="" Then %>
```

```
<INPUT TYPE="button" VALUE="<< Geri, | Hiç bir sey yazmadan arama yapilir mi hiç :) |"
```

```
onClick="history.go(-1)">
```

```
<%
```

```
response.end
```

```
end if
```

```
if konu.eof then %>
```

```
<p align="left"><INPUT TYPE="button" VALUE="<< Geri, | Hiç kayıt bulunamadi |"
```

```
onClick="history.go(-1)">
```

```
<%
```

```
response.end
```

```
else %>
```

```
<br><br>
```

```
<form name="form1" method="post" action="">
```

```
<table align="center" width="50%" border=1 cellpadding=1 cellspacing=1
```

```
bordercolor="#000000">
```

```
<tr bgcolor="#CCCCCC">
```

```
<td width="25%" bgcolor="#000000">Sira no</td>
```

```
<td width="17%" bgcolor="#000000">Onay</td>
```

```
<td width="58%" bgcolor="#000000"><strong>Dokumanin konusu</strong></td>
```

```
</tr>
```

```
<%while not konu.EOF
```

```
n = n + 1
```

```
                                %>
<tr>
                                <td align="center" bgcolor="#333333">&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;<%=konuu.Fields("d_id")%></td>
    <td width="17%" bgcolor="#333333" align="center"> <input id=checkbox1
type=checkbox name=d<%=n%> value="<%=konuu.Fields("d_id")%>"></td>
    <td bgcolor="#333333" align="center"><a
href="d_duzenle.asp?id=<%=konuu.Fields("d_id")%>"><%=konuu.Fields("d_baslik")%></a
></td>
</tr>
<%
konuu.MoveNext
wend
%>
<tr>
                                <td bgcolor="#161616" align="center">&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;<input type="hidden" name="sil_sayi"
value="<%=n%>"></td>
    <td bgcolor="#161616" align="center"><input id="submit" type="submit" value="Sil"
name="submit"></td>
                                <td bgcolor="#161616" align="center">

<%
response.Write(uyari)
if not konuu.EOF then
%>
<%
else
Response.Write " "
end if
%>
</td>
</tr>
</table>
</form>
<%
konuu.Close
end if
%>
</center>
<table align="center" width="200" border="1">
<tr>
<td align="center" bgcolor="#545454">&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;<a href="d_ara.asp">Arama
Yap</a></td>
</tr>
<tr>
```



```
<tr>
  <td bgcolor="#333333"><a href="d_ekle.asp"></a></td>
  <td bgcolor="#333333">Kayıt Ekle </td>
  <td bgcolor="#333333"></td>
  <td bgcolor="#333333"><div align="center">ilgili menüye kayıt ekler </div></td>
</tr>
<tr>
  <td bgcolor="#333333"><a href="listele_d.asp"></a></td>
  <td bgcolor="#333333">Kayıt Düzenle / Sil </td>
  <td bgcolor="#333333"></td>
  <td bgcolor="#333333"><div align="center">ilgili menüdeki kaydı Düzenler veya siler
</div></td>
</tr>
<tr>
  <td bgcolor="#333333"><a href="listele.asp"></a></td>
  <td bgcolor="#333333">Menü Düzenle </td>
  <td bgcolor="#333333"></td>
  <td bgcolor="#333333"><div align="center">Menüde ki köprü isimlerini değiştirir
</div></td>
</tr>
<tr>
  <td bgcolor="#333333">&nbsp;</td>
  <td bgcolor="#333333">&nbsp;</td>
  <td bgcolor="#333333">&nbsp;</td>
  <td bgcolor="#333333">&nbsp;</td>
</tr>
<tr>
  <td bgcolor="#000000">&nbsp;</td>
  <td bgcolor="#000000"><span class="style9">Yönetici</span></td>
  <td bgcolor="#000000"><span class="style7"></span></td>
  <td bgcolor="#000000"><div align="center"><span class="style9">Açıklama
</span></div></td>
</tr>
<tr>
  <td bgcolor="#333333">&nbsp;</td>
  <td bgcolor="#333333">&nbsp;</td>
  <td bgcolor="#333333">&nbsp;</td>
  <td bgcolor="#333333">&nbsp;</td>
</tr>
<tr>
  <td bgcolor="#333333"><a href="listele_y.asp"></a></td>
  <td bgcolor="#333333">Şifre değiştir </td>
  <td bgcolor="#333333"></td>
  <td bgcolor="#333333"><div align="center">Sisteme giriş şifresini değiştirir </div></td>
```

```
</tr>
<tr>
<td bgcolor="#333333">&nbsp;</td>
<td bgcolor="#333333">&nbsp;</td>
<td bgcolor="#333333">&nbsp;</td>
<td bgcolor="#333333"><div align="center">Kullanıcı isminide değiştirebilirsiniz
</div></td>
</tr>
<tr>
<td bgcolor="#333333">&nbsp;</td>
<td bgcolor="#333333">&nbsp;</td>
<td bgcolor="#333333">&nbsp;</td>
<td bgcolor="#333333">&nbsp;</td>
</tr>
<tr>
<td bgcolor="#333333"><a href="listele_m.asp"></a></td>
<td bgcolor="#333333">Mesaj kutusu</td>
<td bgcolor="#333333"></td>
<td bgcolor="#333333"><div align="center">Ziyaretçilerden gelen mesajlar </div></td>
</tr>
<br>
</table>
<table width="130" border="1" align="center">
<tr>
<td width="195" align="center" bgcolor="#000000">
<a href="../default.asp">Siteye dön</a> </td>
</tr>
</table>

</body>
</html>
```

---

## Giris.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1254"%>
<!--#include file="ayar.asp"-->
<html>
<head>
<title>Yonetici Girisi</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-9">
<link href="sitils.css" rel="stylesheet" type="text/css">
</head>

<body tracingsrc="yon_resim/saydam.jpg" tracingopacity="50">

<%
    dim yetkili
    dim sifree
    dim uyarı
    dim checked

    yetkili = Request.Form("yonid")
    sifree = Request.Form("yonsif")

    if request.Form("Submit")="Tamam" then

        Set tablos = Server.CreateObject("ADODB.RecordSet")
        sorgu = "Select * From yonet Where yonetici="
& yetkili & ""

        tablos.open sorgu,Connection,3,3
        if not tablos.eof then

            if sifree = tablos.fields("yifresi") then
                session("basarili") = "true"
                session("Yetkilimiz") = yetkili

                response.Redirect("default.asp")
            else
                uyarı = ("Şifre geçerli değil")
            end if

        else
            uyarı = ("Yönetici id geçerli değil")
        end if

        tablos.Close
        set tablos = nothing
    End if
    if request.QueryString("oturum") = "kapat" then
        session.Abandon()
    End if
%>
```

```
<strong>Yetkili Girişi </strong>
<p>Lütfen Yönetici id'nizi ve Şifrenizi giriniz</p>
<form name="form1" method="post" action="">
  <p>&nbsp;&nbsp;&nbsp;</p>
  <table width="55%" border="0" cellpadding="1" cellspacing="1" bordercolor="#000000">
    <tr>
      <td width="31%">&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;<strong>Yönetici id'niz</strong></td>
      <td width="69%"><input name="yonid" type="password" id="yonid" value="" size="20"
maxlength="8"></td>
    </tr>
    <tr>
      <td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;<strong>Şifreniz</strong></td>
      <td><input name="yonsif" type="password" id="yonsif" size="20" maxlength="8"></td>
    </tr>
    <tr>
      <td>&nbsp;&nbsp;&nbsp;</td>
      <td><input type="submit" name="Submit" value="Tamam"></td>
    </tr>
  </table>
  <p><%=uyari%></p>
</form>
<table width="200" border="1">
  <tr>
    <td align="center" bgcolor="#000000">&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;<a
href="..\default.asp">Siteye dön</a></td>
  </tr>
</table>
</body>
</html>
```

---

### Gonderici.asp

```
<%
class cls_CBUpload_File
  public Name
  public Data
  public ContentType
  public FormName

  public function Size
    Size = len(Data)
  end function

  public function SaveToFile(sFilename)
    dim sBrowser
```

```

dim oFSO, oSaveFile
dim iStartPos
set oFSO = server.createObject("Scripting.FileSystemObject")

SaveToFile = true

on error resume next
set oSaveFile = oFSO.CreateTextFile(sFilename, true)
oSaveFile.Write(Data)
oSaveFile.Close

if(Err <> 0) then
    SaveToFile = false
end if

on error goto 0

set oSaveFile = Nothing
set oFSO = Nothing
end function
end class

class cls_CBUpload
public Form
public Files
public Error

sub parseFormData(byref aData)

Response.Write(Timer - iTimer & "<br />")
dim iCounter, iEndMarker
dim sFieldInfo, sFieldValue
dim oFile
for iCounter = 0 to UBound(aData)
    iEndMarker = instr(aData(iCounter), vbCrLf & vbCrLf)
    if iEndMarker > 0 then
        sFieldInfo = mid(aData(iCounter), 3, iEndMarker - 3)
        sFieldValue = mid(aData(iCounter), iEndMarker + 4, len(aData(iCounter)) -
iEndMarker - 7)
        if(instr(sFieldInfo, "filename=") > 0) then
            if(len(getFileName(sFieldInfo)) > 0) then
                set oFile = new cls_CBUpload_File
                oFile.Name = getFileName(sFieldInfo)
                oFile.FormName = getFieldName(sFieldInfo)
                oFile.Data = sFieldValue
                oFile.ContentType = getContentType(sFieldInfo)
                call Files.Add(getFieldName(sFieldInfo), oFile)
                set oFile = nothing
            end if
        else

```

```

    call Form.Add(getFieldName(sFieldInfo), sFieldValue)
  end if
end if
next
end sub

```

```

function getFieldName(sData)
  dim iStartPos, iEndPos, sQuote
  if(sData = "") then
    getFieldName = ""
    exit function
  end if
  sQuote = chr(34)
  iStartPos = instr(sData, "name=")
  iEndPos = instr(iStartPos + 6, sData, sQuote & ";")
  if iEndPos = 0 then
    iEndPos = instr(iStartPos + 6, sData, sQuote)
  end if
  getFieldName = mid(sData, iStartPos + 6, iEndPos - (iStartPos + 6))
end function

```

```

function getContenttype(byval sData)
  dim iStartPos, iEndPos
  if(sData = "") then
    getContenttype = ""
    exit function
  end if
  iStartPos = instr(sData, "Content-Type: ")
  iEndPos = len(sData)
  getContenttype = mid(sData, iStartPos + 14, iEndPos)
end function

```

```

function getFileName(byval sData)
  dim sBrowser
  dim iStartPos, iEndPos, sQuote
  if(sData = "") then
    getFileName = ""
    exit function
  end if
  sQuote = Chr(34)
  iStartPos = instr(sData, "filename=")
  iEndPos = instr(iStartPos + 10, sData, sQuote & ";")
  if iEndPos = 0 then
    iEndPos = instr(iStartPos + 10, sData, sQuote)
  end if
  sData = mid(sData, iStartPos + 10, iEndPos - (iStartPos + 10))

  sBrowser = UCase(Request.ServerVariables("HTTP_USER_AGENT"))
  if(instr(sBrowser, "WIN") > 0) then
    iStartPos = instrrev(sData, "\")

```

```

    sData = mid(sData, iStartPos + 1)
else
    iStartPos = instrev(sData, "/")
    sData = mid(sData, iStartPos + 1)
end if

getFileName = sData
end function

function parseRequest()
    const adLongVarChar = 201
    dim oRS
    dim iBytesRead, iBlockSize, iTotalBytes

    iTotalBytes = Request.TotalBytes
    iBlockSize = 16384
    iBytesRead = 0

    set oRS = CreateObject("ADODB.Recordset")
    oRS.Fields.Append "BinaryField", adLongVarChar, iTotalBytes
    oRS.Open
    oRS.AddNew

    do while(iBytesRead < iTotalBytes)
        if(iBytesRead + iBlockSize < iTotalBytes) then
            oRS("BinaryField").AppendChunk Request.BinaryRead(iBlockSize)
            iBytesRead = iBytesRead + iBlockSize
        else
            oRS("BinaryField").AppendChunk Request.BinaryRead(iTotalBytes - iBytesRead)
            iBytesRead = iTotalBytes
        end if
    loop

    oRS.Update
    parseRequest = oRS.Fields("BinaryField").Value
    oRS.Close
    set oRS = nothing
end function

sub Class_Initialize
    dim sData, sContentType, sBoundary
    dim iEndPos
    dim aData

    sContentType = Request.ServerVariables("HTTP_CONTENT_TYPE")

    if InStr(sContentType, "multipart/form-data") > 0 then
        sData = parseRequest
        iEndPos = InStrRev(sContentType, "=")
        sBoundary = Trim(Right(sContentType, Len(sContentType) - iEndPos))
    end if
end sub

```

```
aData = Split(sData, sBoundary)
set Form = CreateObject("Scripting.Dictionary")
set Files = CreateObject("Scripting.Dictionary")
call parseFormData(aData)
else
Error = "Incorrect encoding type"
end if
end sub

sub Class_Terminate
set Form = nothing
set Files = nothing
end sub
end class
%>
```

---

### Listele.asp

---

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1254"%>
<%if not session("basarili")="true" then response.Redirect "giris.asp" %>
<!--#Include file="ayar.asp"-->
<html>
<head>
<title>Kayıtları Listele</title>

<link href="sitils.css" rel="stylesheet" type="text/css">
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-9">
<style type="text/css">
<!--
.style10 {color: #99CC33}
-->
</style>
</head>
<body>
<table align="center" width="838" border="1">
<tr>
<td width="243">&nbsp;&nbsp;&nbsp;<span><strong>Yöneticim Hoşgeldin</strong>
</span></td>
<td width="327"><div align="center">| Mucitler Grubu | Yönetici Paneli |</div></td>
<td width="246"><div align="right"><a href="giris.asp?oturum=kapat"><strong>Oturumu
Kapat</strong></a>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</div></td>
</tr>
</table>
<%
```

dim tablom

```

Set tablom =
Server.CreateObject("ADODB.RecordSet")
  sorgu = "Select * From katolog"
  tablom.open sorgu,Connection,3,3
%>
<br><br>
<table align="center">
<td bgcolor="#5D5D5D">MENÜ LİSTESİ</td>
</table><br>
<table align="center" width="55%" border=1 cellpadding=1 cellspacing=1
bordercolor="#000000">
  <tr bgcolor="#CCCCCC">
    <td width="23%" bgcolor="#000000">Sıra No</td>
    <td align="left" width="77%" bgcolor="#000000"><strong>Menüde Görünen Köprünün
ismi</strong></td>
  </tr>
<%
  while not tablom.eof %>
  <tr>
    <td align="center" bgcolor="#333333">&nbsp;&nbsp;&nbsp;&nbsp;<%=tablom.Fields("k_id")%></td>
    <td bgcolor="#333333">&nbsp;&nbsp;&nbsp;&nbsp;<a
href="m_duzenle.asp?id=<%=tablom.Fields("k_id")%>"><%=tablom.Fields("k_konu")%></
a></td>
  </tr>
<% tablom.MoveNext
wend %>

</table>
<%
tablom.Close
%>
</div>
<table align="center" width="200" border="1">
  <tr>
    <td align="center" bgcolor="#545454"><a href="default.asp">Yönetim Paneline Dön</a></td>
  </tr>
</table>
</body>
</html>

```

---



```
silinen = silinen + 1
end if
next

uyari = silinen & " Kayıt Silindi"
```

End Sub

```
sorgu = "Select * From dokuman"
tablom.open sorgu,Connection,3,3
%>
<br><br>
<table align="center">
<td bgcolor="#5D5D5D">SİTEDE GÖRÜNEN KAYITLI KONULAR</td>
</table><br>
<form name="form1" method="post" action="">
  <table align="center" width="50%" border=1 cellpadding=1 cellspacing=1
bordercolor="#000000">
  <tr bgcolor="#CCCCCC">
    <td width="25%" bgcolor="#000000">Sıra no</td>
    <td width="17%" bgcolor="#000000">Onay</td>
    <td width="58%" bgcolor="#000000"><strong>Dokumanın konusu</strong></td>
  </tr>
  <%while not tablom.EOF
    n = n + 1
    %>
    <tr>
      <td align="center" bgcolor="#333333">&nbsp;&nbsp;&nbsp;&nbsp;<%=tablom.Fields("d_id")%></td>
      <td width="17%" bgcolor="#333333" align="center"> <input id=checkbox1
type=checkbox name=d<%=n%> value="<%=tablom.Fields("d_id")%>"></td>
      <td bgcolor="#333333" align="center"><a
href="d_duzenle.asp?id=<%=tablom.Fields("d_id")%>"><%=tablom.Fields("d_baslik")%></
a></td>
    </tr>
  <%
tablom.MoveNext
wend
%>
<tr>
      <td bgcolor="#161616" align="center">&nbsp;&nbsp;&nbsp;&nbsp;<input type="hidden" name="sil_sayi"
value="<%=n%>"></td>
      <td bgcolor="#161616" align="center"><input id="submit" type="submit" value="Sil"
name="submit"></td>
      <td bgcolor="#161616" align="center">
    <%
  </td>
</tr>
```

```

response.Write(uyari)
if not tablom.EOF then
%>
<%
else
Response.Write " "
end if
%>
</td>
</tr>
</table>
</form>
<%
tablom.Close
%>
<table align="center" width="200" border="1">
<tr>
<td align="center" bgcolor="#545454">&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;<a href="d_ara.asp">Arama
Yap</a></td>
</tr>
<tr>
<td align="center" bgcolor="#545454"><a href="default.asp">Yönetim Paneline Dön</a></td>
</tr>
</table>
</body>
</html>

```

---

### **Listele\_m.asp**

---

```

<%@LANGUAGE="VBSCRIPT" CODEPAGE="1254"%>
<%if not session("basarili")="true" then response.Redirect "giris.asp" %>
<!--#Include file="ayar.asp"-->
<html>
<head>
<title>Gelen Mesajlarım</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-9">
<link href="sitils.css" rel="stylesheet" type="text/css">
</head>

<body>
<table align="center" width="838" border="1">
<tr>
<td width="243">&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;<span><strong>Yöneticim Hoşgeldin
</strong></span></td>
<td width="327"><div align="center">| Mucitler Grubu | Yönetici Paneli |</div></td>

```





```

</tr>
</table>
</form>
<%
tablom.Close
%>
<table align="center" width="200" border="1">
<tr>
<td align="center" bgcolor="#545454"><a href="default.asp">Yönetim Paneline Dön</a></td>
</tr>
</table>
</body>
</html>

```

---

### Listele\_y.asp

---

```

<%@LANGUAGE="VBSCRIPT" CODEPAGE="1254"%>
<%if not session("basarili")="true" then response.Redirect "giris.asp" %>
<!--#Include file="ayar.asp"-->
<html>
<head>
<title>Kayıtları Listele</title>

<link href="sitils.css" rel="stylesheet" type="text/css">
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-9">
<style type="text/css">
<!--
.style10 {color: #99CC33}
-->
</style>
</head>
<body>
<table align="center" width="838" border="1">
<tr>
<td width="243">&nbsp;&nbsp;&nbsp;<span><strong>Yöneticim Hoşgeldin</strong>
</span></td>
<td width="327"><div align="center">| Mucitler Grubu | Yönetici Paneli |</div></td>
<td width="246"><div align="right"><a href="giris.asp?oturum=kapat"><strong>Oturumu
Kapat</strong></a>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</div></td>
</tr>
</table>
<%

```

dim tablom

Set tablom = Server.CreateObject("ADODB.RecordSet")

sorgu = "Select \* From yonet"

```

%>
<br><br>
<table align="center">
<td bgcolor="#5D5D5D">YÖNETİCİ LİSTESİ</td>
</table><br>
<table align="center" width="37%" border=1 cellpadding=1 cellspacing=1
bordercolor="#000000">
<tr bgcolor="#CCCCCC">
<td width="32%" bgcolor="#000000">Sıra No</td>
<td align="left" width="68%" bgcolor="#000000"><strong>Yönetici
Listesi</strong></td>
</tr>
<%
while not tablom.eof %>
<tr>
<td align="center" bgcolor="#333333">&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;<%=tablom.Fields("yid")%></td>
<td bgcolor="#333333">&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;<a
href="y_duzenle.asp?id=<%=tablom.Fields("yid")%>"><%=tablom.Fields("yonetici")%></a
></td>
</tr>
<% tablom.MoveNext
wend %>
</table>
<%
tablom.Close
%>
<table align="center" width="200" border="1">
<tr>
<td align="center" bgcolor="#545454"><p align="center"><a
href="y_ekle.asp" class="style10">Yönetici Ekle</a></td>
</tr>
<tr>
<td align="center" bgcolor="#545454"><p align="center"><a href="default.asp" class="style10">Yönetim Paneline
Dön</a></td>
</tr>
</table>
</div>
</body>
</html>

```

---

## M\_oku.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1254"%>
<%if not session("basarili")="true" then response.Redirect "giris.asp" %>
<!-- #include file="ayar.asp" -->
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
<title>Döküman Göster</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-9" />

<link href="sitils.css" rel="stylesheet" type="text/css">
</head>
<body>
<script language="JavaScript1.2">
function clrBar(line,face)
{
    with(document.body.style)
    {
        scrollbarDarkShadowColor=line;
        scrollbar3dLightColor=line;
        scrollbarArrowColor="black";
        scrollbarBaseColor=face;
        scrollbarFaceColor=face;
        scrollbarHighlightColor=face;
        scrollbarShadowColor=face;
        scrollbarTrackColor="#F3F3F3";
    }
}

function setcolor()
{
    var w = document.body.clientWidth;
    var h = document.body.clientHeight;
    var x = event.clientX;
    var y = event.clientY;
    if(x>w) clrBar("#c0c0c0","#4b4b4b"); // Colors
of active state
else clrBar("#969696","#646464"); // Colors of
normal state
}

if (document.all){
clrBar(null,null);
document.onmousemove=setcolor;
}
</script>
<table align="center" width="838" border="1">
<tr>
<td width="243">&nbsp;&nbsp;&nbsp;<span><strong>Yöneticim Hoşgeldin
</strong></span></td>
<td width="327"><div align="center">| Mucitler Grubu | Yönetici Paneli |</div></td>

```



```

</table>
<table align="center" width="200" border="1">
  <tr>
    <td align="center" bgcolor="#545454"><p align="center">&nbsp;&nbsp;&nbsp;&nbsp;<a href="liste_m.asp" class="style10">Gelen
Mesajlara Dön</a></p></td>
  </tr>
  <tr>
    <td align="center" bgcolor="#545454"><p align="center"><a href="default.asp" class="style10">Yönetim Paneline
Dön</a></p></td>
  </tr>
</table>
</body>
</html>

```

---

### **Res\_gonder2.asp**

---

```

<%@LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<%if not session("basarili")="true" then response.Redirect "giris.asp" %>
<!--#include file="gonderici.asp" -->

```

```

<head>
<meta http-equiv="Content-Language" content="tr">
<link href="sitils.css" rel="stylesheet" type="text/css">
</head>
<%
dim Upload, File, Item, iTimer
iTimer = Timer()
Server.ScriptTimeout = 36000
set Upload = new cls_CBUUpload
for each File in Upload.Files
set File = Upload.Files(File)
Response.Write(File.Name & "<br />")
if(File.SaveToFile(Server.Mappath("../dresim/" & File.Name))) then
Response.Write("* Lütfen Dosya Uzantısını Kopyalayınız")
end if
next
for each Item in Upload.Form
next
set Upload = nothing
%>

```

---

### **Y\_duzenle.asp**

---

```

<%@LANGUAGE="VBSCRIPT" CODEPAGE="1254"%>
<%if not session("basarili")="true" then response.Redirect "giris.asp" %>

```

```
<!--#Include file="ayar.asp"-->  
<%
```

```
dim kaydet  
dim kullanıcı  
dim sifre  
dim uyarı
```

```
kullanıcı = request.Form("kullanıcim")  
sifre = request.form("sifrem")
```

```
if request.Form("submit")<>" " then  
    call SaveRecord()  
End if
```

```
if request.QueryString("id")<>" " then  
    call GetRecord()  
End if
```

```
Sub SaveRecord()
```

```
    dim tablo  
    set tablo = server.CreateObject("Adodb.Recordset")  
    if request.Form("id")="" then  
        sorgu = "Select * From yonet"  
        tablo.open sorgu,Connection,3,3  
        tablo.addnew  
        tablo.fields("yonetici") = kullanıcı  
        tablo.fields("yifresi") = sifre  
        tablo.update  
        uyarı = "Değişiklikler başarılı"  
        kaydet = true
```

```
    else
```

```
        sorgu2 = "Select * From yonet Where  
  
        tablo.open sorgu2,Connection,3,3  
        tablo.fields("yonetici") = kullanıcı  
        tablo.fields("yifresi") = sifre  
        tablo.update  
        uyarı = "Kayıt düzeltildi"  
        kaydet = true
```

```
    End if
```

```
    tablo.close  
    set tablo = nothing
```

```
End Sub
```

```
Sub GetRecord()
```

```
    dim tablo
```

```
    set tablo = server.CreateObject("Adodb.Recordset")
```

```

request.QueryString("id")
sorgu3 = "Select * From yonet Where yid=" &
tablo.open sorgu3,Connection,3,3
if not tablo.eof then
    kullanici = tablo.fields("yonetici")
    sifre = tablo.fields("yifresi")
End If
tablo.close
set tablo = nothing
kaydet = false

End Sub

%>

<html>
<head>
<title>Dokuman Düzenleme</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-9">
<link href="sitils.css" rel="stylesheet" type="text/css">
</head>

<body>
<table align="center" width="838" border="1">
<tr>
<td width="243">&nbsp;&nbsp;&nbsp;<span><strong>Yöneticim Hoşgeldin</strong>
</span></td>
<td width="327"><div align="center">| Mucitler Grubu | Yönetici Paneli |</div></td>
<td width="246"><div align="right"><a href="giris.asp?oturum=kapat"><strong>Oturumu
Kapat</strong></a>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</div></td>
</tr>
</table>
<p>
<%if not kaydet then%>
</p>
<br><br>
<table align="center">
<td bgcolor="#5D5D5D">YÖNETİCİ GİRİŞ BİLGİLERİNİ DÜZENLE</td>
</table><br>
<form action="" method="post" name="form">
<table align="center" width="60%" height="54" border="1" cellpadding="1"
cellspacing="1" bordercolor="#000000">
<tr>
<td width="37%" height="23" bgcolor="#3F3F3F">&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;<strong>Yönetici
id'si</strong></td>
<td width="63%" bgcolor="#3F3F3F"><input name="kullanicim" type="text"
id="name3" value="<% =kullanici %>"> </td>

```







## Yeni\_duzenle.asp

```
<%@LANGUAGE="VBSCRIPT" CODEPAGE="1254"%>  
<%if not session("basarili")="true" then response.Redirect "giris.asp" %>  
<!--#Include file="ayar.asp"-->  
<%
```

```
dim kaydet  
dim sira  
dim uyari
```

```
sira = request.Form("konu")
```

```
if request.Form("submit")<>"" then  
    call SaveRecord()  
End if
```

```
if request.QueryString("id")<>"" then  
    call GetRecord()  
End if
```

```
Sub SaveRecord()
```

```
dim tablo  
set tablo = server.CreateObject("Adodb.Recordset")  
if request.Form("id")="" then  
    sorgu = "Select * From katalog"  
    tablo.open sorgu,Connection,2,3  
    tablo.addnew  
    tablo.fields("k_konu") = sira
```

```
    tablo.update  
    uyari = "Veri kaydedildi"  
    kaydet = true
```

```
else
```

```
    sorgu2 = "Select * From katalog Where
```

```
    tablo.open sorgu2,Connection,2,3  
    tablo.fields("k_konu") = sira
```

```
    tablo.update  
    uyari = "Kayit düzeltildi"  
    kaydet = true
```

```
End if
```

```
tablo.close  
set tablo = nothing
```

```
End Sub
```

```
Sub GetRecord()
```





## Sitils.css

---

```
.style3 {color: #CCCCCC; font-weight: bold; }
.style4 {
    color: #FF3300;
    font-weight: bold;
}
.style5 {color: #993300}
.style6 {color: #000099}
.style7 {color: #FFFFFF}
.style9 {color: #FFFFFF; font-weight: bold; }
body,td,th {
    color: #FFCC00;
}
.yazi_alanim {
    background-color:#444444;
    color:#FF9900;
    font-size:14px;
}
body {
    background-image: url(yon_resim/arkaplan.jpg);
    background-repeat:inherit;
    background-position:center;
    cursor: crosshair;
    color: #FF9900;
    background-color:#444444;
}
a:link {
    text-decoration: none;
    color: #FF9900;
}
a:visited {
    color: #99CC00;
    text-decoration: none;
}
a:hover {
    color: #FFFFFF;
    text-decoration: none;
}
a:active {
    color: #CCCCCC;
    text-decoration: none;
}
h1,h2,h3,h4,h5,h6 {
    font-family: Times New Roman, Times, serif;
    font-weight: bold;
}
}
```

---

## Sitil.css

---

```
.arka_ust{
    background-attachment:fixed;
    background-image:url(resims/aplan.gif);
    background-position:left;
    background-repeat:repeat;
    color: #9999FF;
}
.arka_sol{
    background-attachment:fixed;
    background-image:url(resims/aplan.gif);
    background-position:left;
    background-repeat:repeat;
    color: #FFFF66;
}
.arka_sag{
    background-attachment:fixed;
    background-image:url(resims/aplan.gif);
    background-repeat:repeat;
    background-position:center;
    color: #CCFF33;
}
.arka_sag_c{
    background-attachment:fixed;
    background-image:url(resims/aplan.gif);
    background-position:right;
    background-repeat:repeat;
    color: #000000;
}
.tablomText {
    font: 11px Arial, Helvetica, sans-serif;
    font-size:14px;
    color: #CCFF33;
    line-height:16px;
    letter-spacing:0.1em;
    text-decoration: none;
    background-color:#0099FF;
    border-style:double;
    border-color:#0000CE;
}
.boxText {
    font: 11px Arial, Helvetica, sans-serif;
    color: #99CC33;
    line-height:16px;
    letter-spacing:0.1em;
    text-decoration: none;
    border:thin;
}
.goster_tablo {
```

```

        color: #99FF00;
    }

.yazi_alanim {
    background-color:#000088;
    color:#FFFFFF;
    font-size:14px;
}

#tablo td {
    border-bottom: 2px solid #F4FFE4;
}

#tablo a {
    font: bold 11px Arial, Helvetica, sans-serif;
    color: #003399;
    display:block;
    padding:8px 6px 10px 20px;
}

#tablo a:hover {
    background: #0000CC;
    color:#5B7DF2;
}

#resim {
    float:left;
    width: 170px;
}

a {
    font-size: 12px;
    font-weight: bold;
}

a:link {
    color: #CCCC00;
    text-decoration: none;
}

a:visited {
    color: #99CC00;
    text-decoration: none;
}

a:hover {
    color: #FFFFFF;
    text-decoration: none;
}

a:active {
    color: #CCCCCC;
    text-decoration: none;
}

.y_sol_arka {
    font-family: "Times New Roman", Times, serif;
}

```

```
font-size: 12px;  
font-style: normal;  
line-height: normal;  
font-weight: normal;  
font-variant: normal;  
text-transform: capitalize;  
color: #FF6600;  
text-decoration: none;  
background-attachment: fixed;  
background-repeat: no-repeat;  
background-position: left;  
cursor: crosshair;  
filter: Gray;
```

```
}  
.y_sag_arka {
```

```
font-family: "Times New Roman", Times, serif;  
font-size: 12px;  
font-style: normal;  
line-height: normal;  
font-weight: normal;  
font-variant: normal;  
text-transform: capitalize;  
color: #FF6600;  
text-decoration: none;  
background-attachment: fixed;  
background-repeat: no-repeat;  
background-position: left;  
cursor: crosshair;  
filter: Gray;
```

```
}
```

---